





The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

NOTES:

 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550


2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

3 - DEPENDING ON COUNTRY OF ORIGIN, HEX STOCK MAY VARY AS NOTED. SEE TABLE FOR ACCEPTABLE WRENCH SIZES.

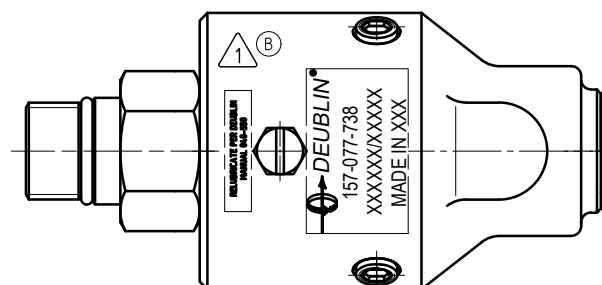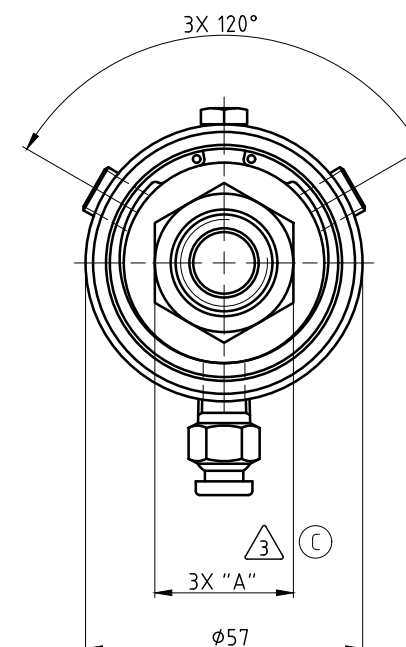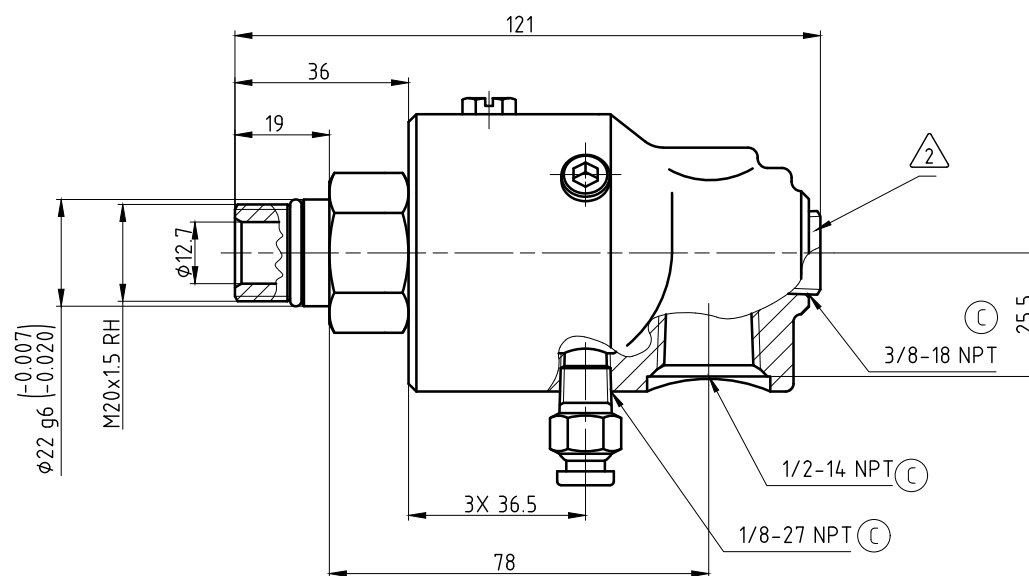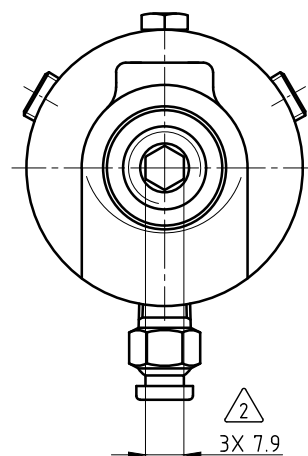

(B)	OPERATING DATA			
	MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	THERMAL OIL
	PRESSURE MAX.	50 bar	1 bar	6.6 bar
	SPEED MAX.	3500 min ⁻¹		
	TEMPERATURE MAX.	121 °C		
	DRY RUN (WITHOUT ANY MEDIA)	NO		
(C)	RECOMMENDED FILTRATION	60 micron		

B	HEX SIZES		WRENCHES	
	UNITS	"A"	 30mm	 1 1/8"
	METRIC [mm]	30-0.13	✓	☒
	IMPERIAL [in]	1.125-0.006	✓	✓

 DEUBLIN HOERBIGER Rotary Solutions					PROJECTION: 		SCALE: 1:1	
							MATERIAL: INTERFACE CONTROL DRAWING	
					DATE NAME DRN. 10.06.2020 MZe ENGR. 10.06.2020 RMika APPD.		TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung	
							NO. 157-077-738	
C SEE ECO 60341 02/21 MZe B SEE ECO 056312 06/20 MZe C S U L P M O D I F I C A T I O N F F O D A T F S I G N					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		SHEET A3	