CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1. - BEARING CAVITY FILLED WITH SILASTIC FOR BEARING PROTECTION..
2. - REQUIRED DIMENSIONS FOR SNAP RING. REF: TRUARC #N5000-112

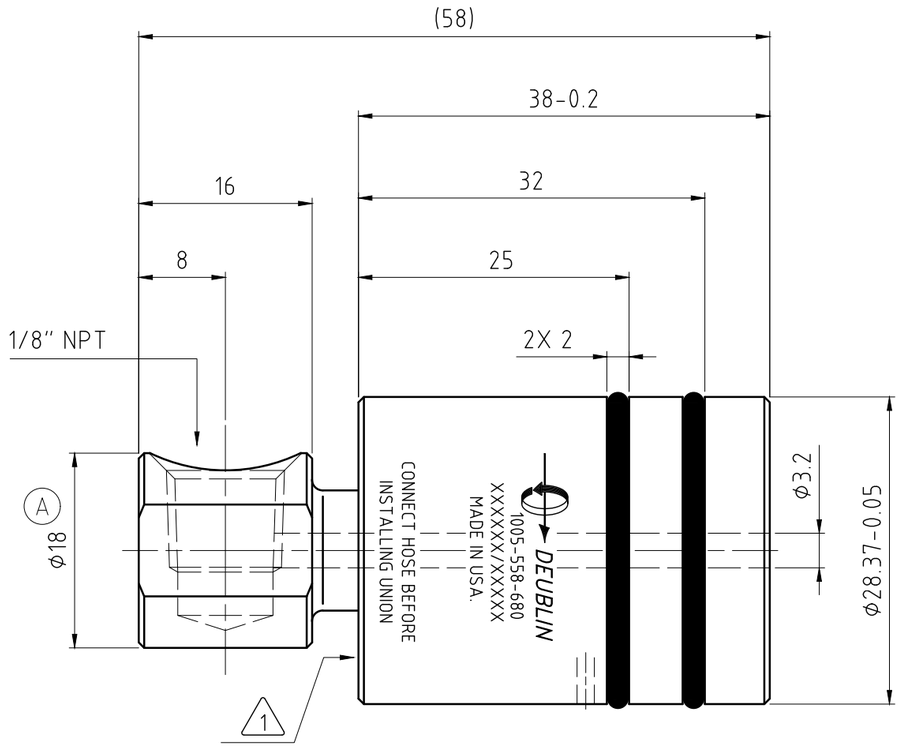

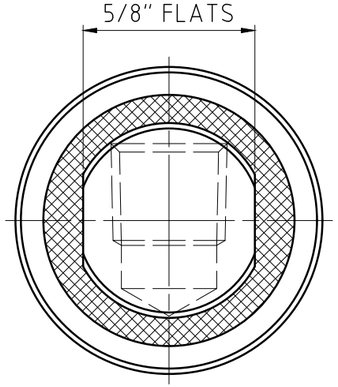

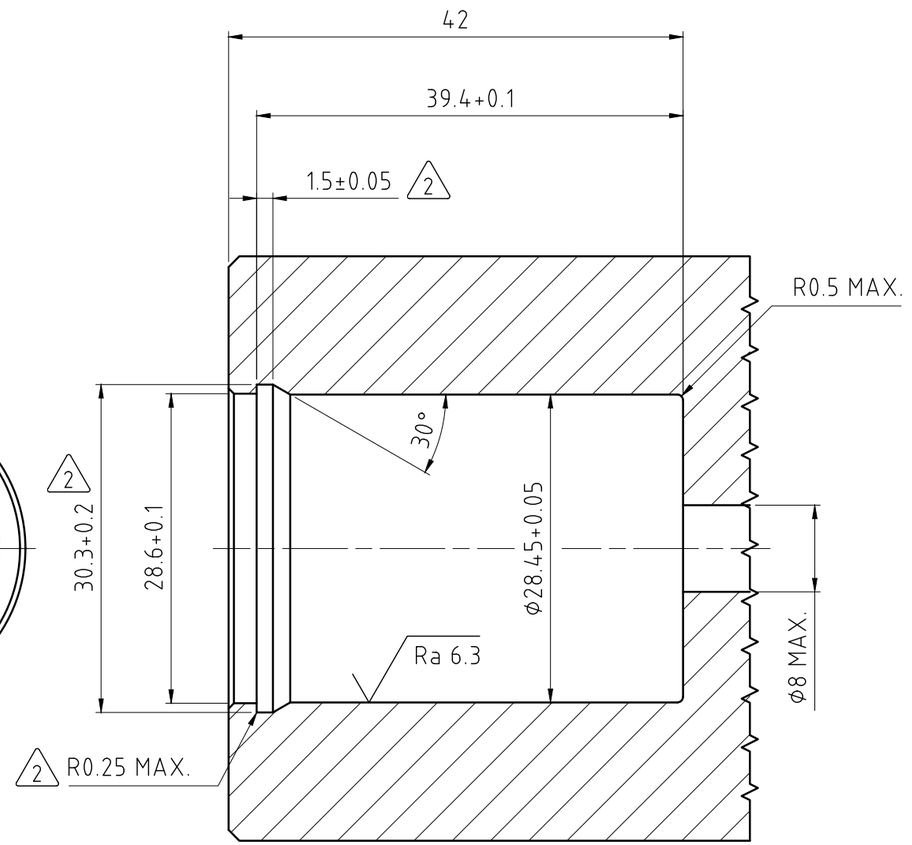

TYPICAL INSTALLATION DETAIL

OPERATING DATA:

HYDRAULIC SERVICE
70 bar MAX. PRESSURE
3500 RPM MAX. SPEED
121°C MAX. MEDIA TEMPERATURE

DEUBLIN® Engineered for Performance

PROJECTION:

		DATE	NAME
DRN.		01/19/11	GA
ENGR.		01/19/11	GA
APPD.			

ISSUE	MODIFICATION	ECO	DATE	SIGN
A	WAS ϕ20	014064	5/11	GA

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SCALE: 2:1
MATERIAL:
TITLE: INTERFACE CONTROL DRAWING
DEUBLIN UNION 1005-558-680
NO. 1005-558-680
SHEET A3