
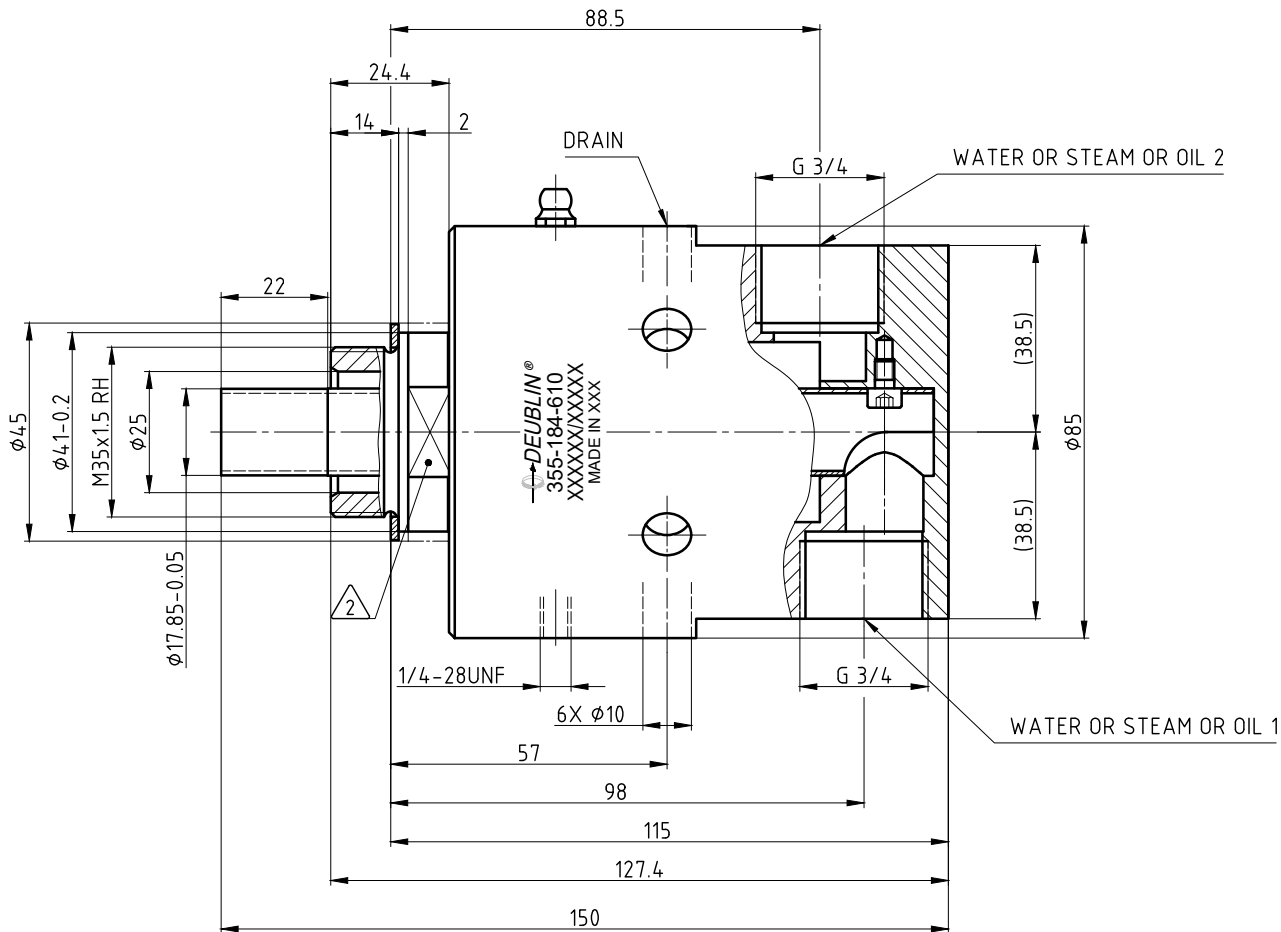


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:
1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550

2 - A.F. 36.

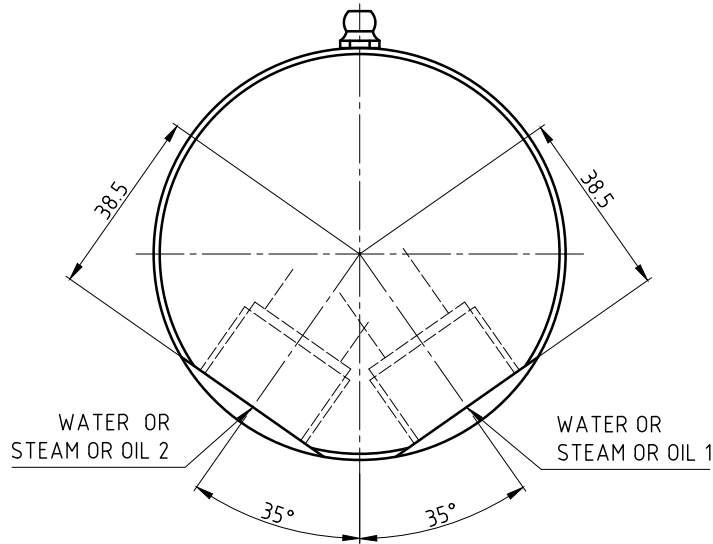

OPERATING DATA			
MEDIA	HOT OIL	WATER	SATURATED STEAM (INTERMITTENT)
PRESSURE MAX.	6 bar	50 bar	1 bar
SPEED MAX.	3000 min ⁻¹	3000 min ⁻¹	3000 min ⁻¹
TEMPERATURE MAX.	120 °C	120 °C	120 °C
FILTRATION	60 µm	60 µm	60 µm
DRY RUN (WITHOUT ANY MEDIA)	NO	NO	NO



SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME
DRN. 10.10.2011	CD
ENGR. 10.10.2011	CW
APPD.	

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO.	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE
A	WAS STEAM 012895 08/14 CW
ISSUE	MODIFICATION ECO DATE SIGN

NO. 355-184-610

SHEET A2