
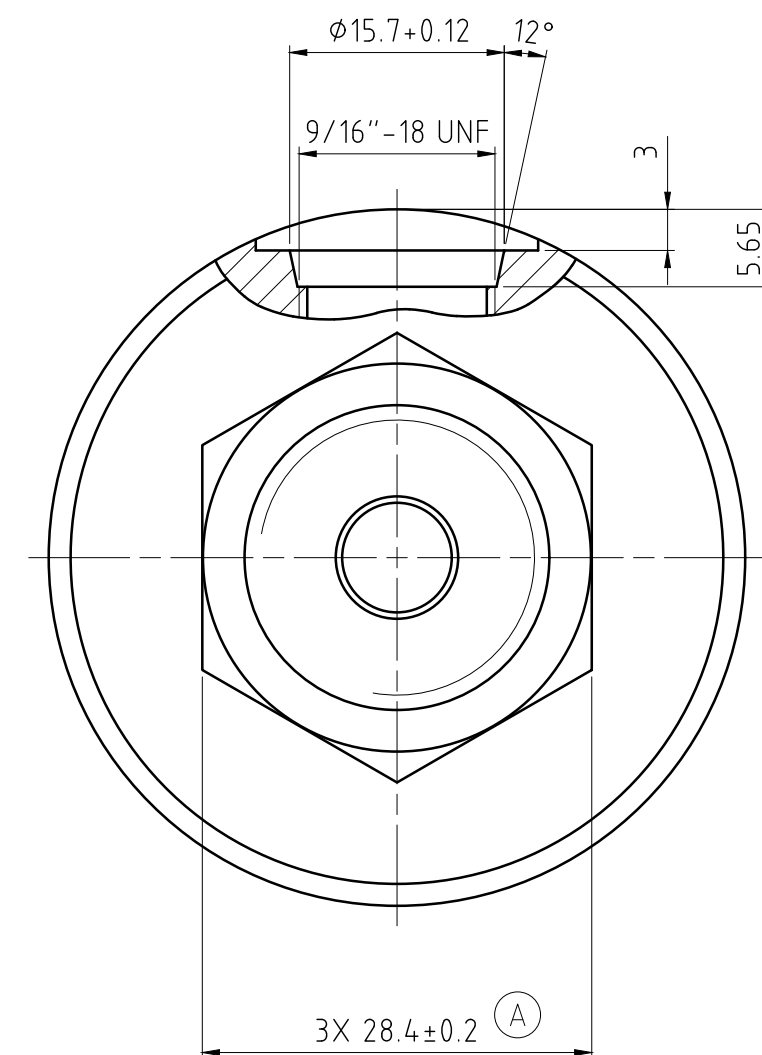


NOTES:

- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
- 2 - USE INSTALLATION INSTRUCTION 040-513.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

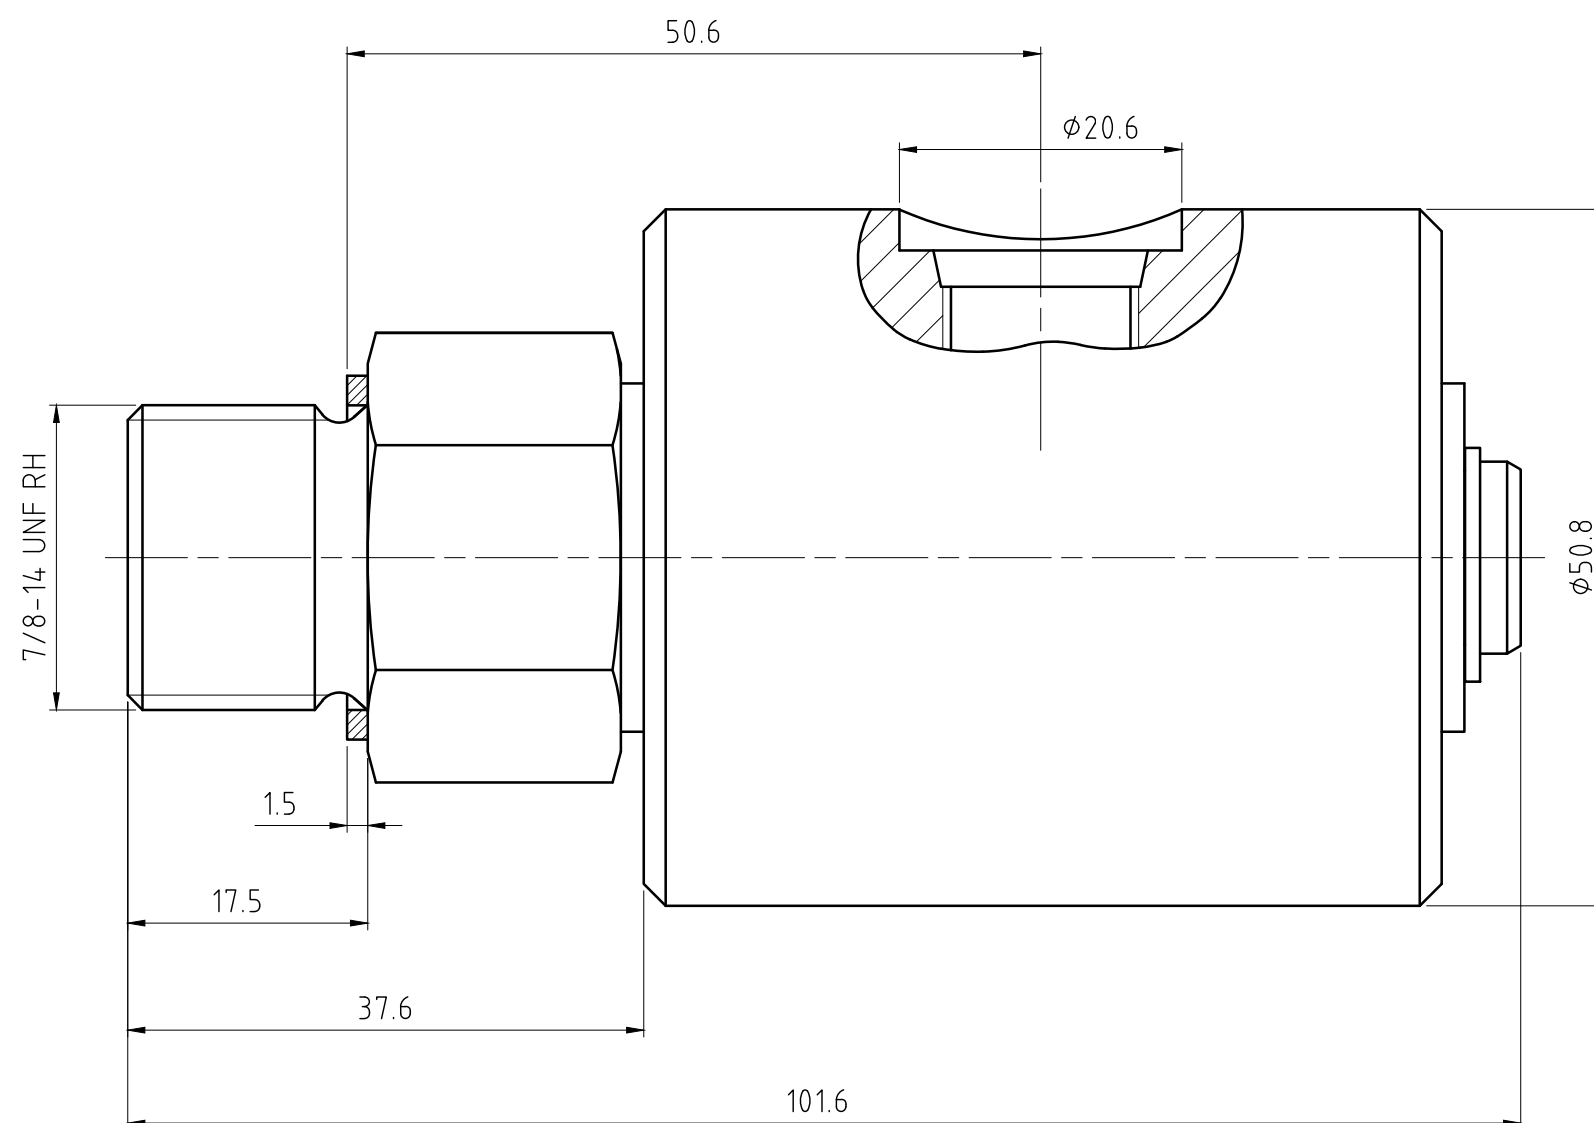

OPERATING DATA 1

MEDIA		AIR	HYDRAULIC OIL	VACUUM
PRESSURE	MAXIMUM	10 bar	207 bar	6.7 kPa
	MINIMUM	5 °C	5 °C	5 °C
TEMPERATURE		250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
MAXIMUM SPEED				



PROJECTION:



SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: UNION, 7/8-14 UNF RH ROTOR

NO. 17-014-001

SHEET A3

					PROJECTION: 		SCALE: 2:1	
MATERIAL: INTERFACE CONTROL DRAWING								
					DATE	NAME	TITLE: UNION, 7/8-14 UNF RH ROTOR	
					DRN.	06/23/09 L. Galindo		
					ENGR.			
					APPD.			
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE			
A	UPDATED GEOMETRY	023706	10/13	NR			NO. 17-014-001	SHEET A3
ISSUE	MODIFICATION	ECO	DATE	SIGN				