

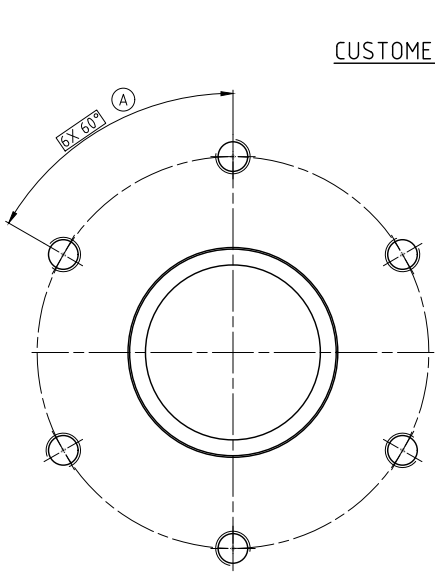
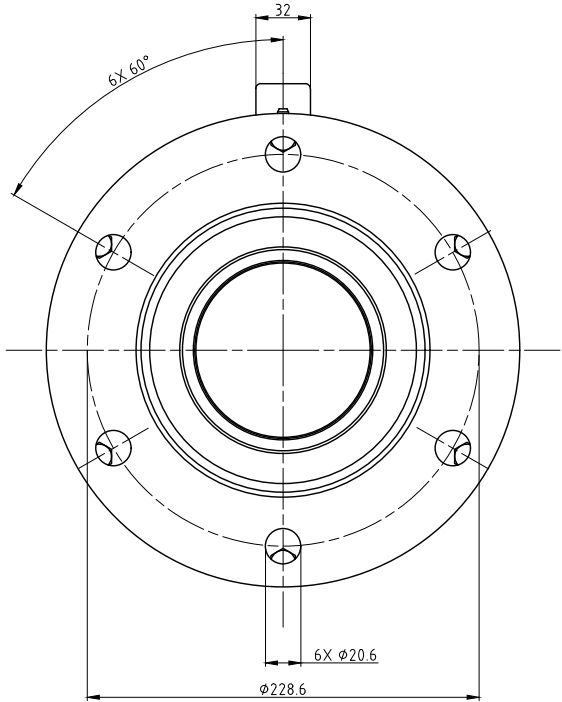


- NOTES:
- 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-561.
 - 2 - TORQUE LUG PROVIDED FOR ANTI-ROTATION. DO NOT RESTRICT MOVEMENT OF UNION.
 - 3 - O-RING SIZE: 2-361
SUGGESTED O-RING MATERIAL: FKM
 - 4 - SURFACE FINISH APPLIES WITHIN INDICATED AREA ONLY.

CONFIDENTIAL
The reproduction, distribution and collection of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of patent, utility model or design.

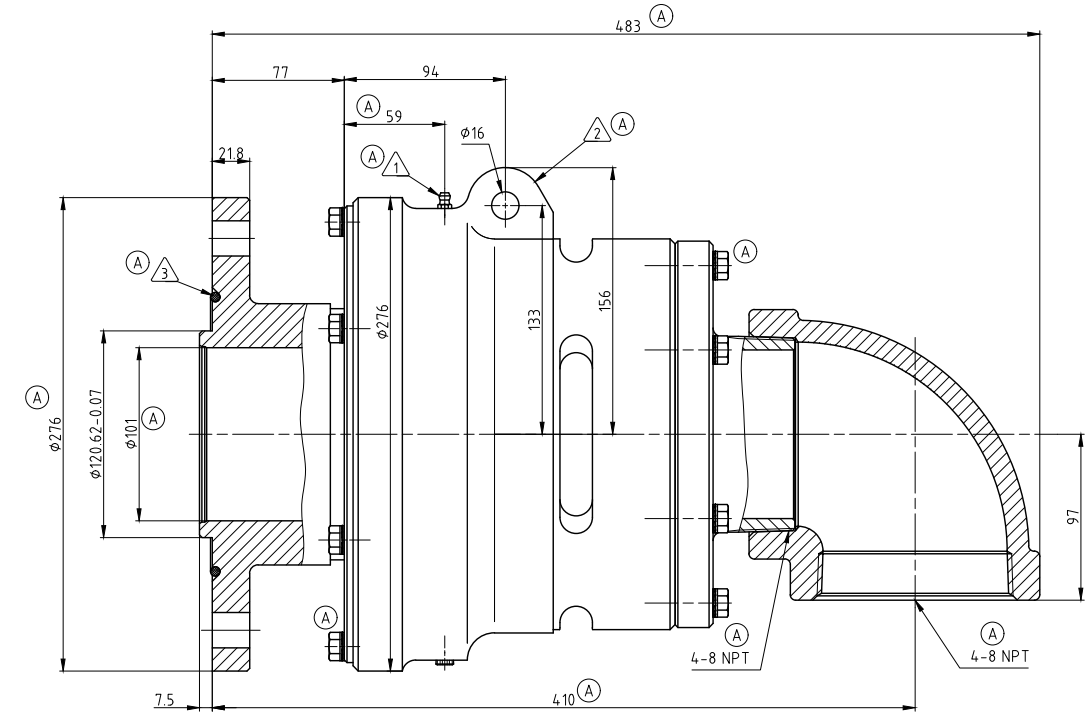

CUSTOMER INTERFACE

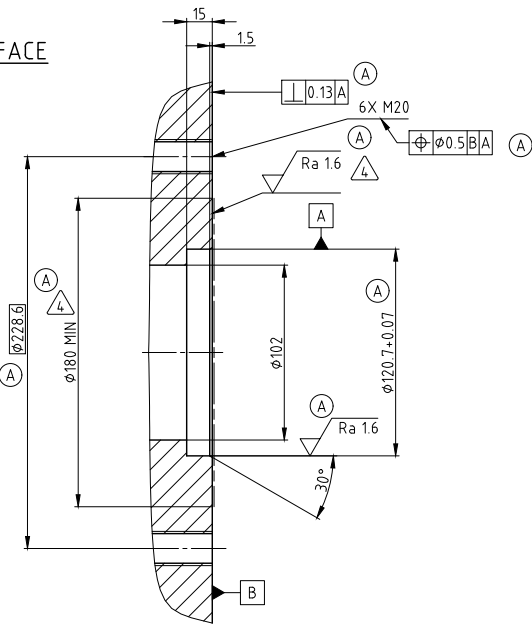

OPERATING DATA	
MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	750 min ⁻¹
TEMPERATURE MAX.	90 °C
DRY RUN (WITHOUT ANY MEDIA)	NO
RECOMMENDED FILTRATION	60 micron
TORQUE	13.6 Nm
FLOW MAX	2665 lpm

		PROJECTION	SCALE: 1:2
		MATERIAL:	INTERFACE CONTROL DRAWING
		TITLE:	DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung
		NO.	6400-042-330
		SHEET	A1
A	ECO	63737	06/23
ISSUE	MODIFICATION	ECO	DATE
UNLESS SPECIFICALLY TOLERANCES, ALL DIMENSIONS ARE CONSIDERED REFERENCE			