
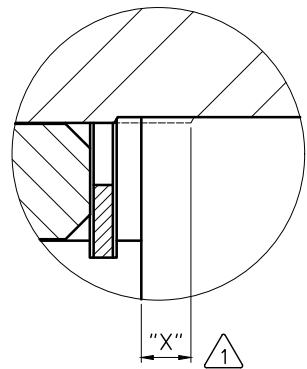
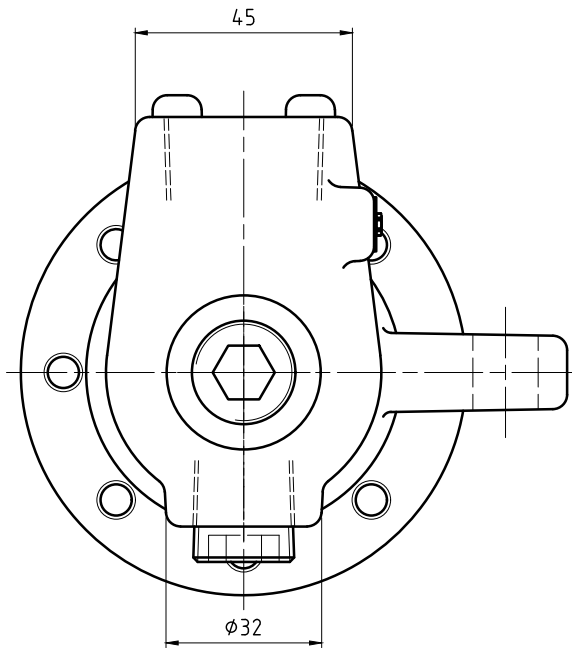
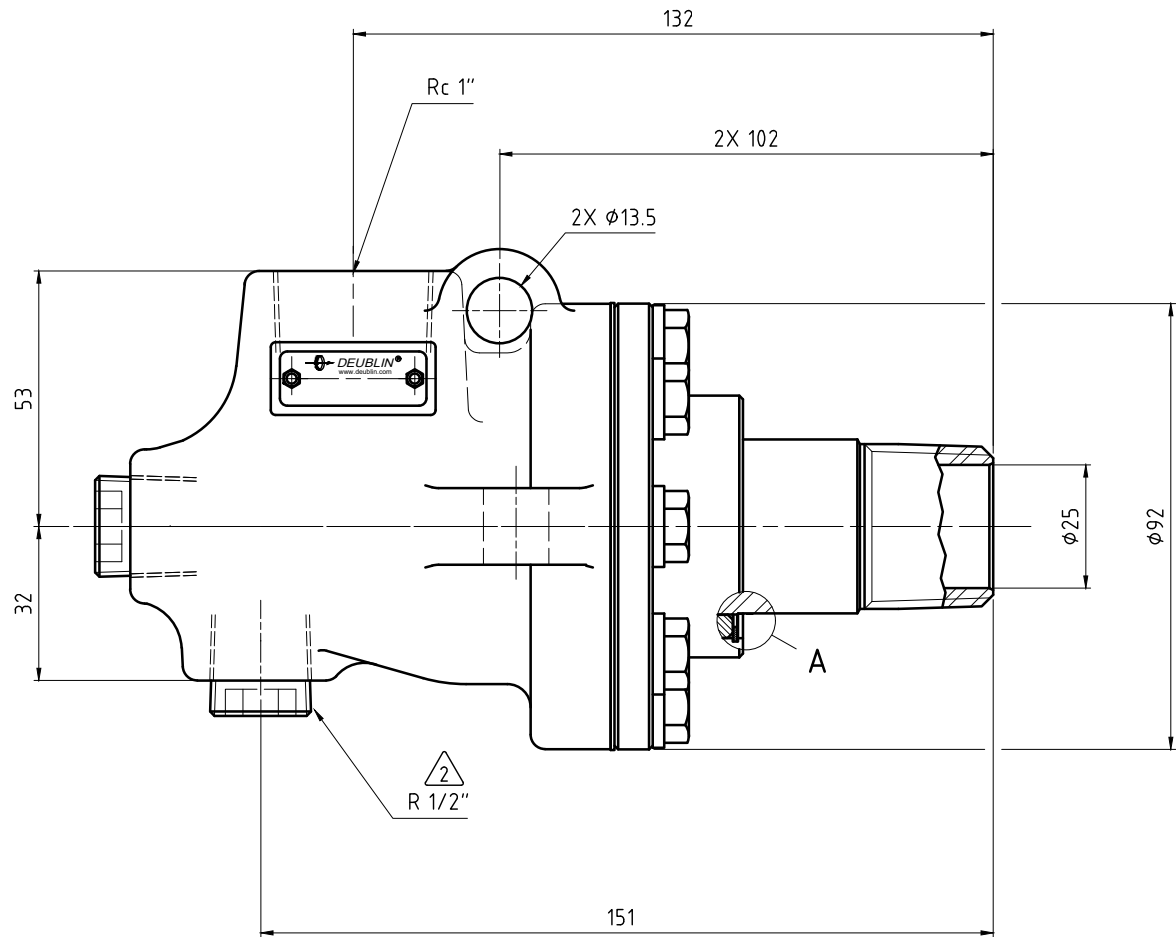



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

- NOTES:
- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - 2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

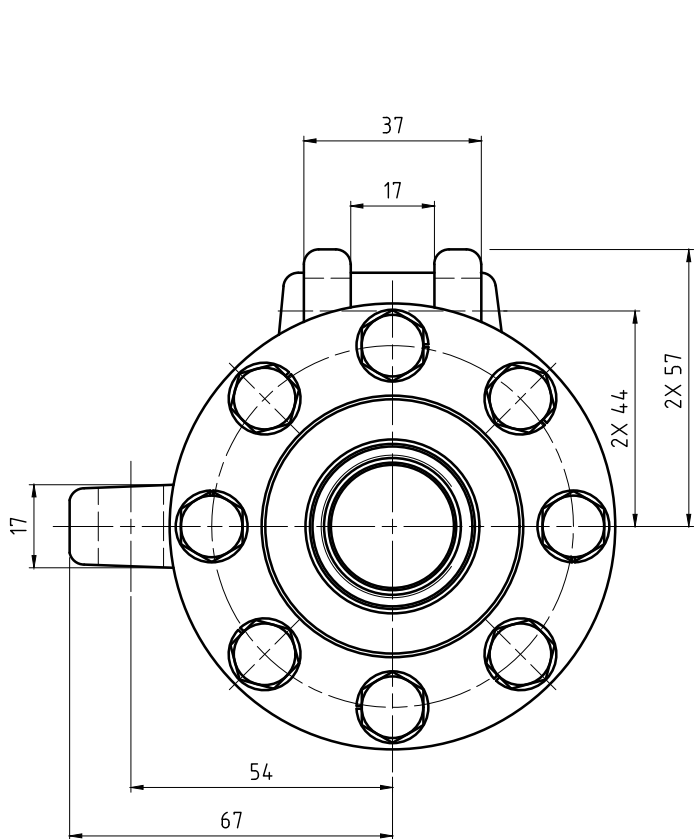

SEAL WEAR DETAIL

A (5:1)

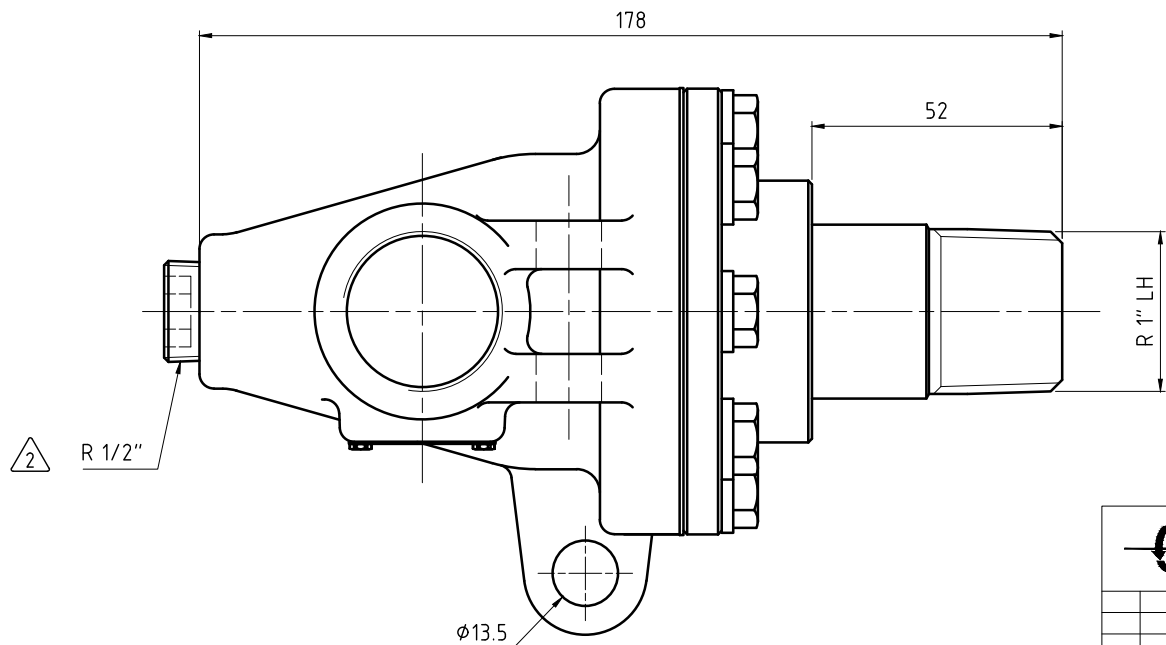

OPERATING DATA		
MEDIA	THERMAL OIL	
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN	NO	



SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE:

UNION TYPE C MONOFLOW HOT OIL
Rc PORTS R 1" LH ROTOR

NO.

BC-54100-16-21B

SHEET

A2

DATE	NAME
DRN. 04/04/2014	lgalindo
ENGR. 05/20/2014	L. Freed
APPD.	

DATE	NAME
DRN. 04/04/2014	lgalindo
ENGR. 05/20/2014	L. Freed
APPD.	

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE