

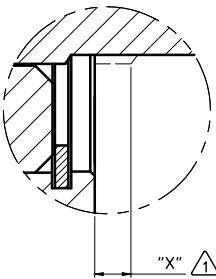
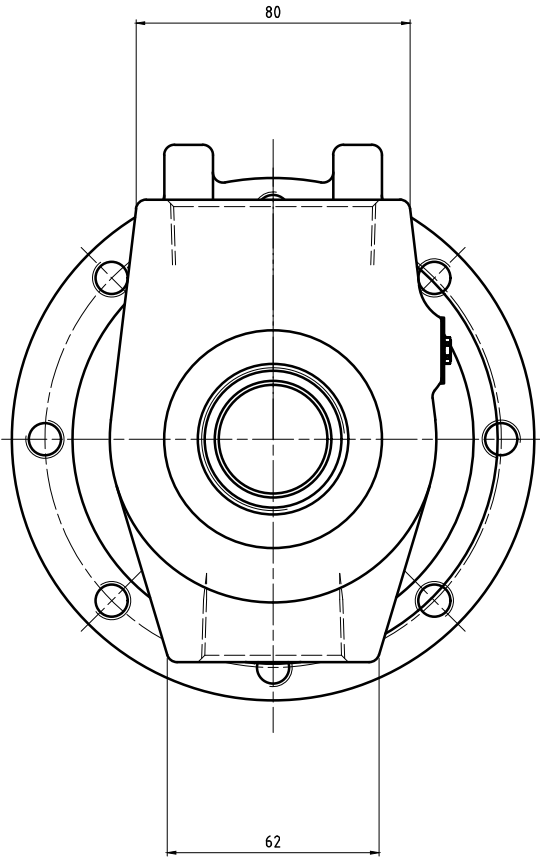
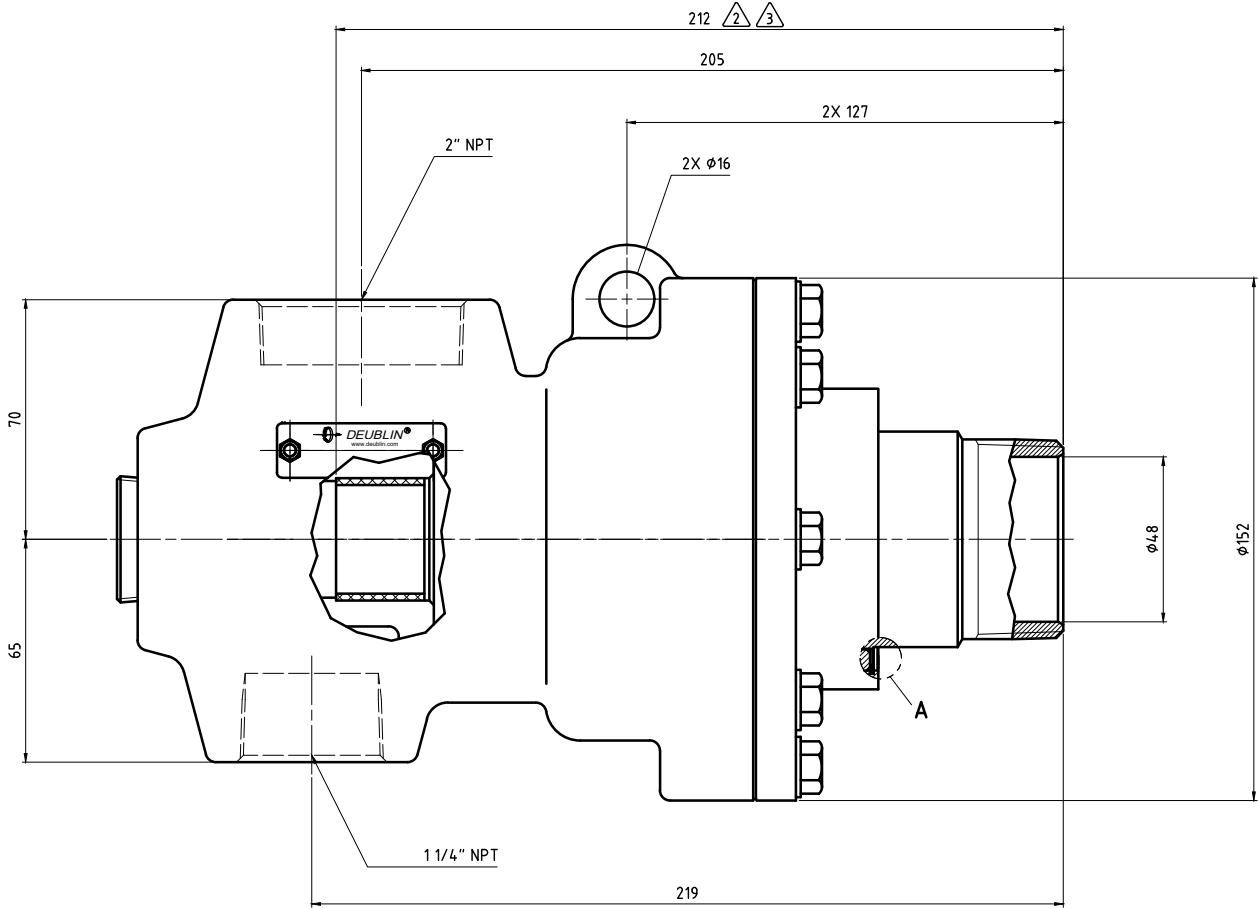
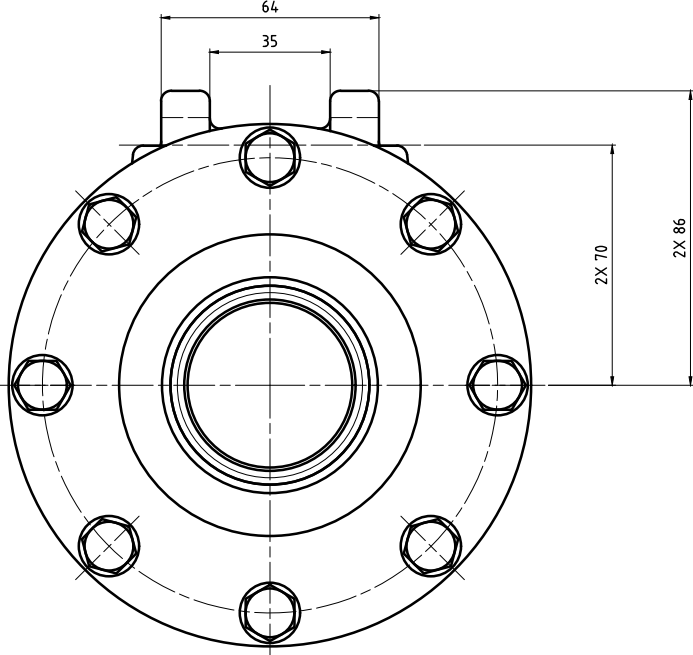


- NOTES:
- ⚠ - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 7.9 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - ⚠ - PIPE LENGTH INTO UNION.
 - ⚠ - PIPE SUPPLIED BY CUSTOMER.
 - ⚠ - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, REPRODUCTION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

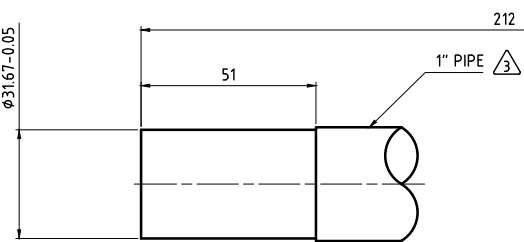

SEAL WEAR DETAIL
A (5:1)

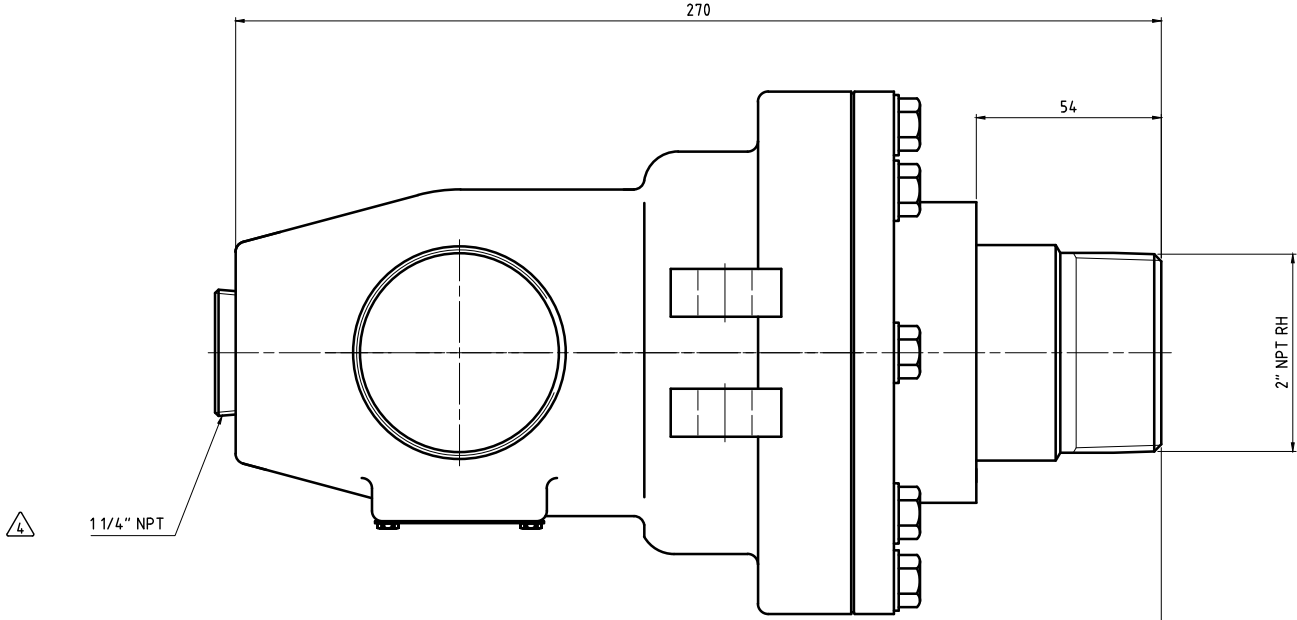

CUSTOMER SIPHON
PIPE END DETAIL

OPERATING DATA		
MEDIA	STEAM	
PRESSURE	MAXIMUM	15.5 bar
TEMPERATURE	MAXIMUM	203 °C
SPEED	MAXIMUM	350 min ⁻¹
DRY RUN	NO	



Engineered for Performance

PROJECTION: 

DRN:	10/17/2016	NAME:	DDchoa
ENGR:	10/17/2016		LFreed
APPD:			

UNLESS SPECIFICALLY TOLERANCES, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: UNION TYPE C ROTATING SIPHON
NPT PORTS 2" RH ROTOR

NO. BC-54205-32-50

SHEET AT