


 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

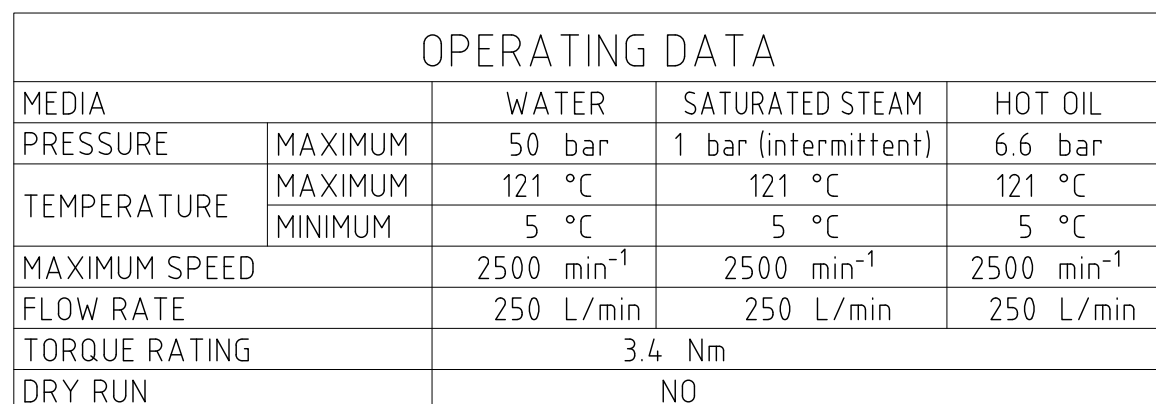

MATERIAL:

INTERFACE CONTROL DRAWING FOR
DEUBLIN UNION 555-492-395

555-492-395

SHEET
A3

GENERAL TOLERANCES: ISO 2768 - mK
EDGES OF UNDEFINED SHAPE: ISO 13715

ISSUE	MODIFICATION	ECO	DATE	SIGN
-------	--------------	-----	------	------

Tolerance
class

DIN ISO 2768-m

Permissible deviation for basic size range

0.5 up to 3	over 3 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 400	over 400 up to 1000	over 1000 up to 2000	over 2000 up to 4000
± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2