


- NOTES:
- 1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1116-555-578.
 - 2 – OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
IF OPERATING CONDITIONS ARE MARGINAL, PLEASE CONSULT DEUBLIN ENGINEERING.
 - 3 – RECOMMENDED FILTRATION IS 25 MICRONS.
 - 4 – DO NOT RUN DRY.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION OF DEUBLIN COMPANY.
COPYING, USE, TRANSMISSION, DISTRIBUTION, AND
DISCLOSURE ARE SUBJECT TO THE TERMS AND
CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.

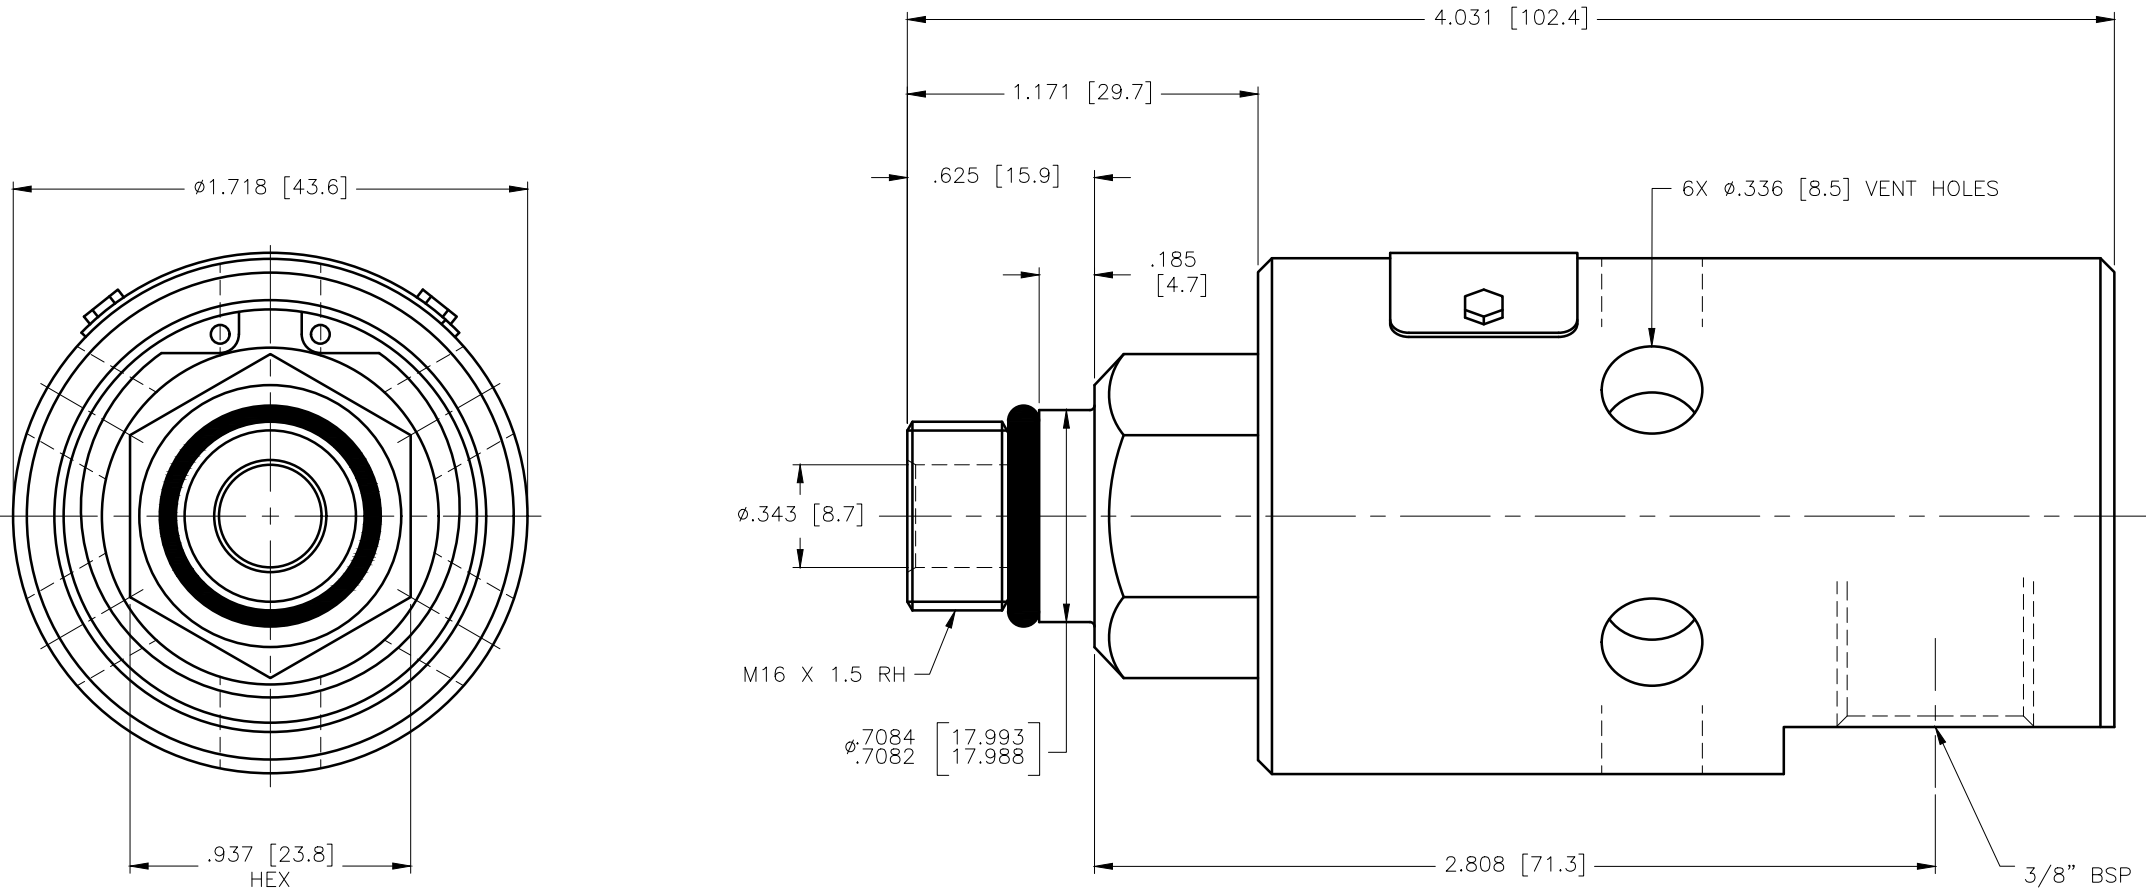

OPERATING DATA		
MEDIA	COOLANT	
MAX COOLANT PRESSURE	1000 PSI	70 bar
MAX SPEED	10,000 RPM	10,000/min
MAX FLOW RATE	13.8 GPM	50 L/min
MAX TEMPERATURE	250°F	121°C

					SCALE 2.5:1	DWG SIZE B	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE	 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.
					DRN NR	12/05/07		
					ENGR TW	12/05/07		
					APPD TW	12/05/07		
					PART NO.		DIMENSIONS IN [] ARE IN MILLIMETERS.	TITLE: INTERFACE CONTROL DRAWING OF DEUBLIN UNION 1116-555-578
					1116-555-578			
					CUSTOMER			
LET.	REVISION	ECO	DATE	SIGN				DWG NO. 1116-555-578 C.A.D DRAWING