
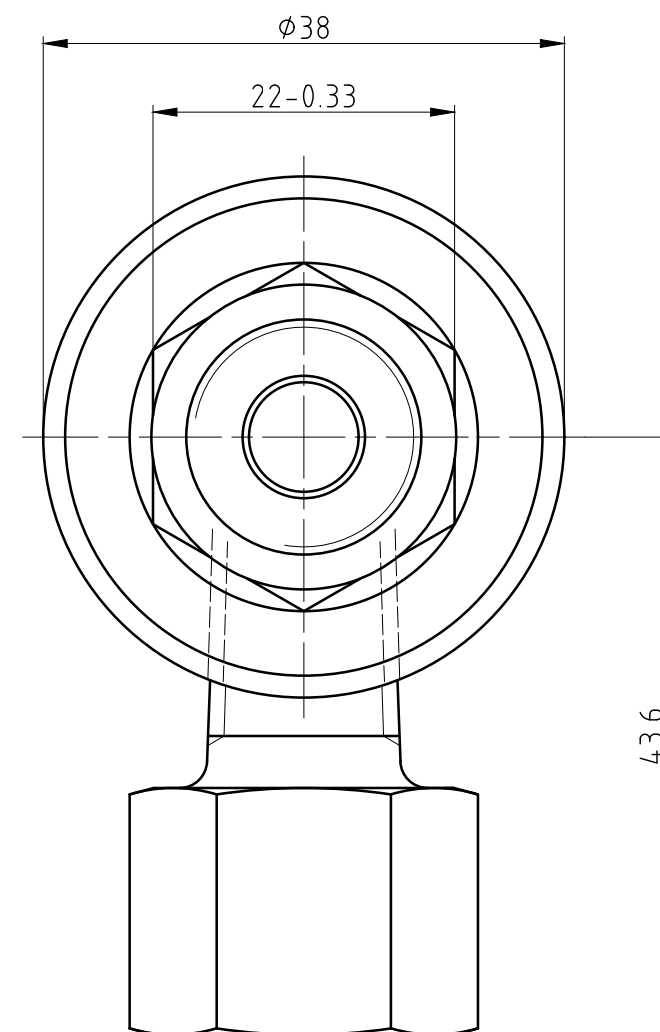


NOTES:

- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
 2 - APPROXIMATE DISTANCE TO LOCKUP.
 3 - USE INSTALLATION INSTRUCTION 040-513.

CONFIDENTIAL
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

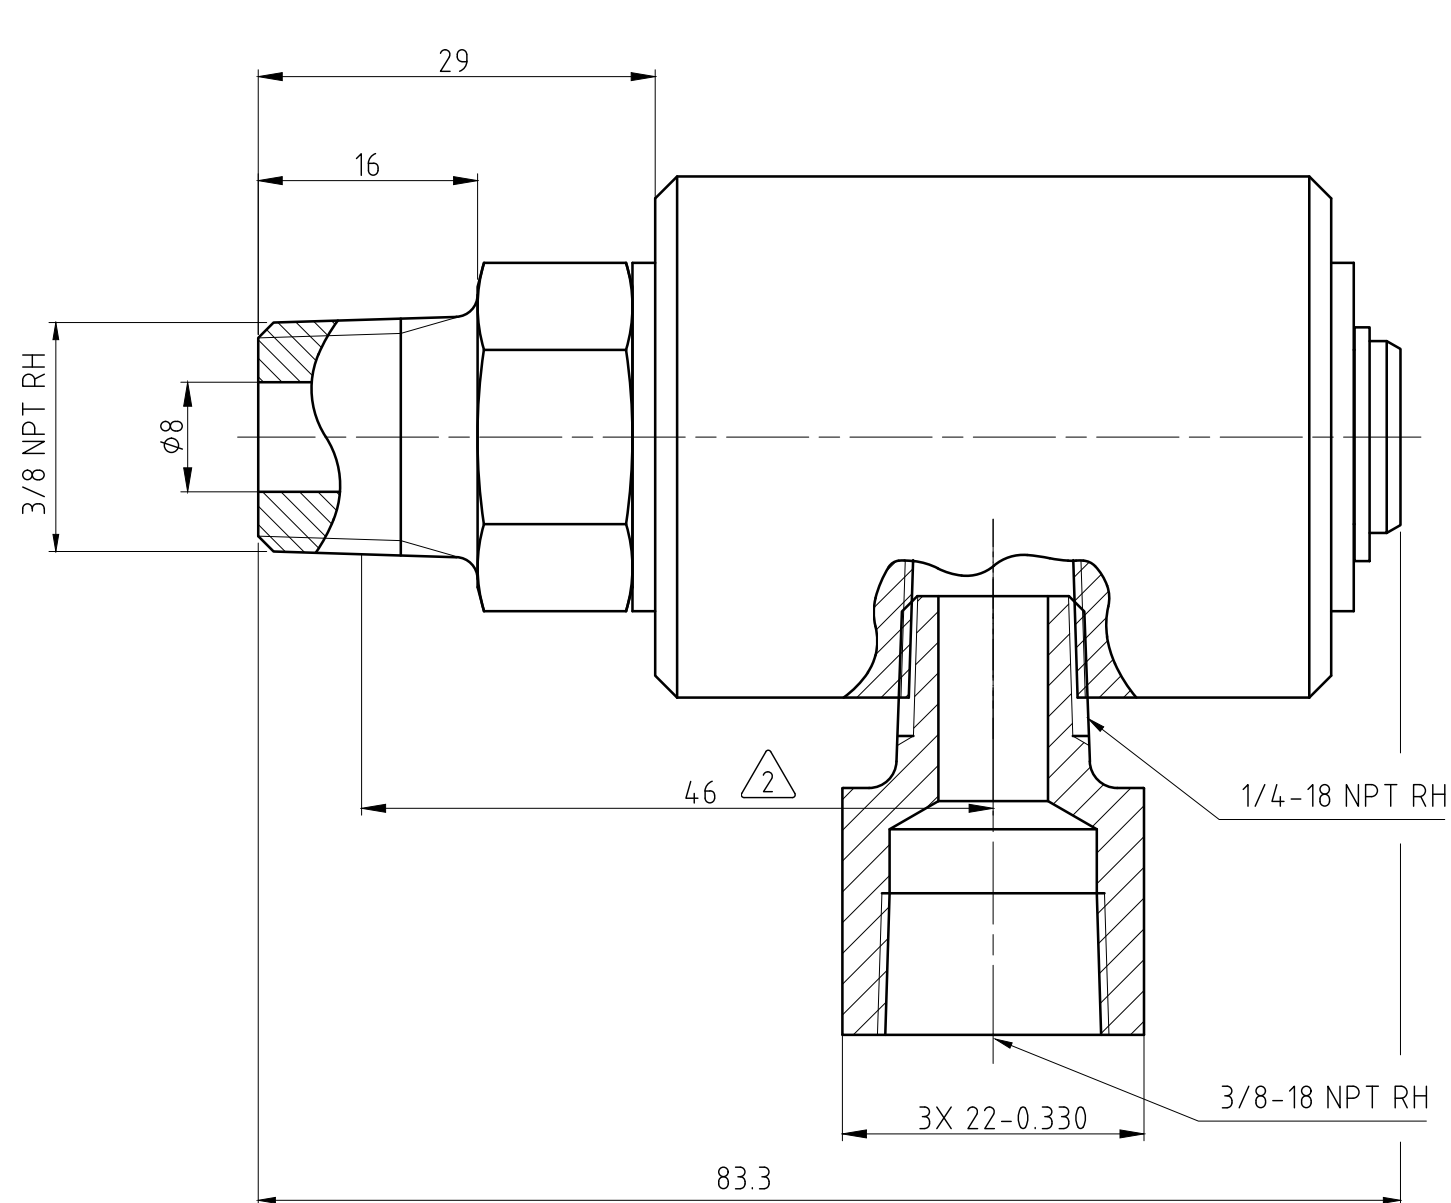


OPERATING DATA 1

MEDIA		AIR	HYDRAULIC OIL	VACUUM
PRESSURE	MAXIMUM	10 bar	207 bar	6.7 kPa
	MINIMUM	5 °C	5 °C	5 °C
TEMPERATURE		250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
MAXIMUM SPEED				



DEUBLIN COMPANY
 WAUKEGAN, ILLINOIS, U.S.A.

PROJECTION:



SCALE: 2:1

MATERIAL:

DATE	NAME
05/27/2009	galindolm
DRN.	
ENGR.	
APPD.	

TITLE:
**INTERFACE CONTROL DRAWING FOR
 17 SERIES UNION, 3/8" NPT RH ROTOR**

NO.
17-050-041

SHEET
 A3

ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE