


NOTES:

- 1 - USE INSTRUCTION MANUAL 40-500!
2 - ELBOW 525-007
3 - SIPHON TUBE SUPPLIED BY CUSTOMER
4 - NOMINAL LENGTH OF ENGAGEMENT "WRENCH TIGHTEN"
5 - BORE ELBOW

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

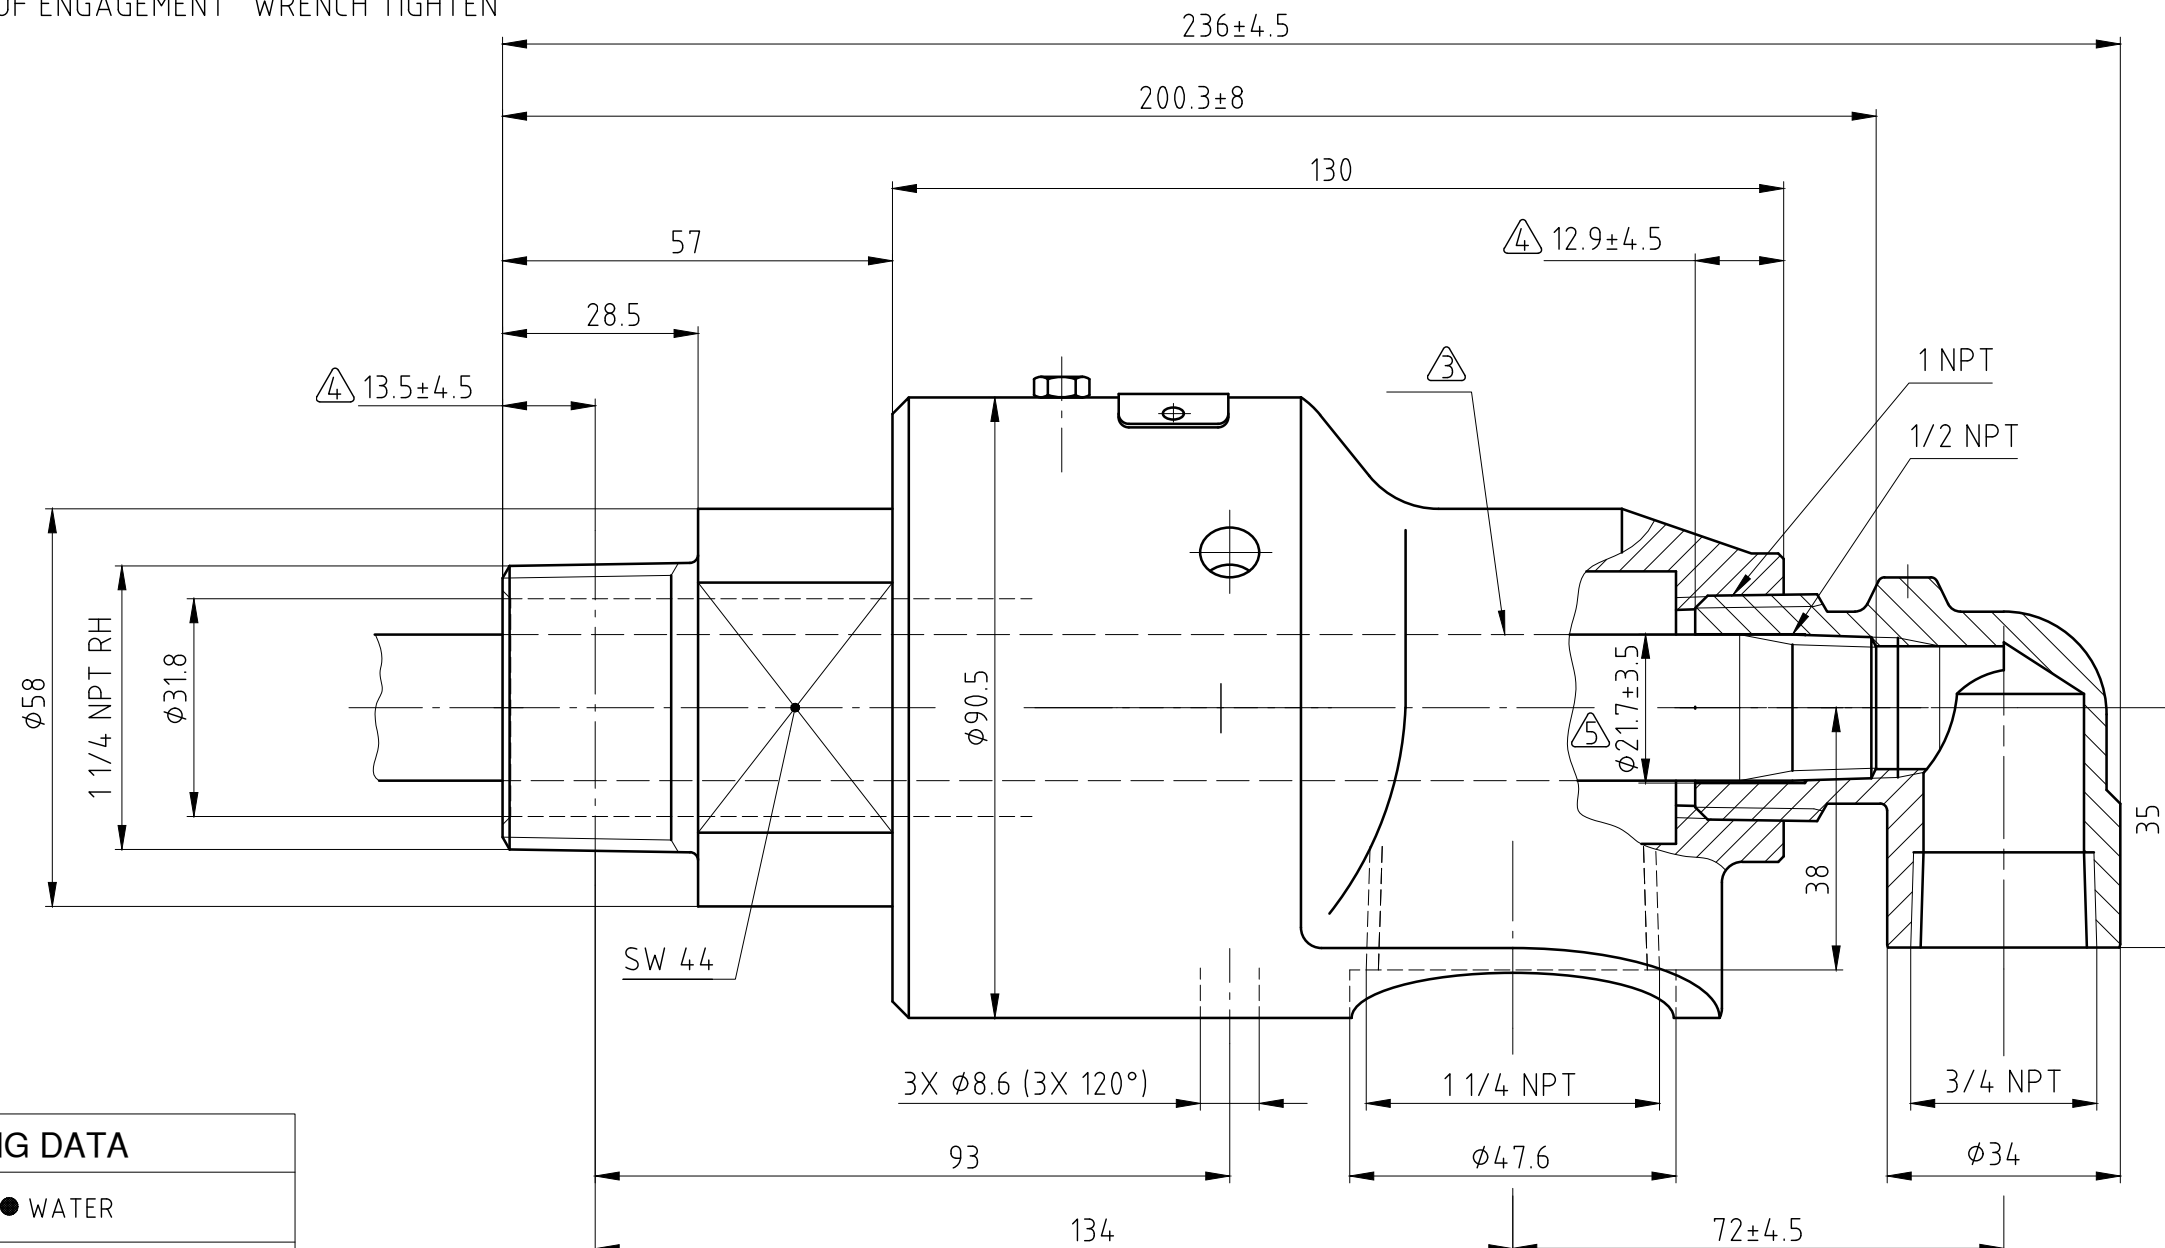

OPERATING DATA

MEDIA	● WATER
MAX. PRESSURE	50 bar
MAX. TEMPERATURE	120° C
MAX. SPEED	2500 min ⁻¹
FILTRATION	60 µm
DRY RUN	NOT POSSIBLE
NOTES	● PRESSURE EXCEEDING 8 bar ONLY WITH WATER MAX. 50°C



SCALE: 1:1
Z:\ \UNIONS\
MATERIAL: INTERFACE CONTROL DRAWING

						DATE	NAME
					DRN.	03.12.07	Schmid
					ENGR.	03.12.07	Ch. Wolf
					APPD.		
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		
ISSUE	MODIFICATION	ECO	DATE	SIGN			

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung
NO. 525-000-001-007
SHEET A3

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE