
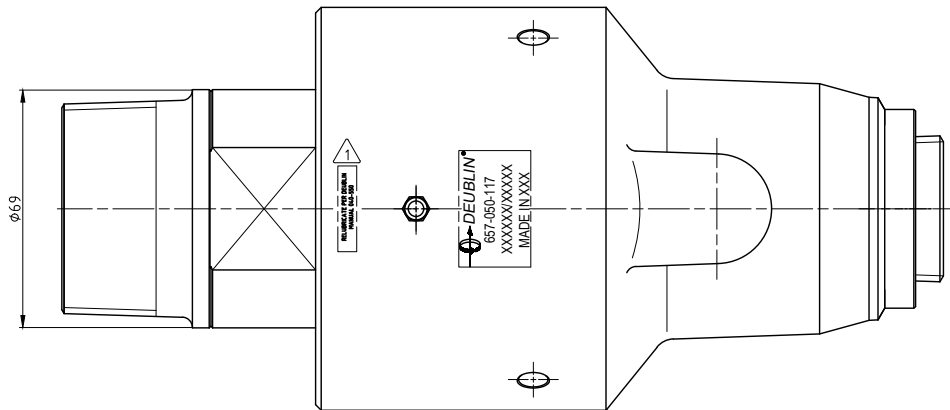
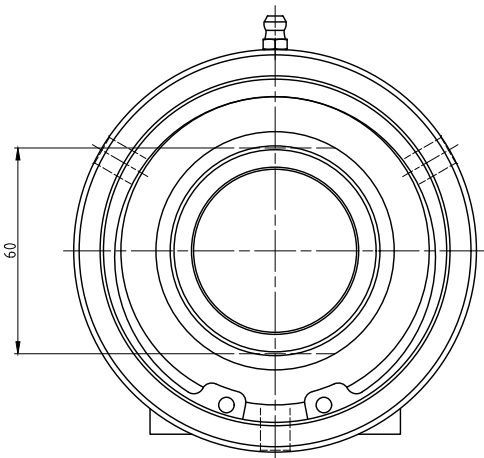
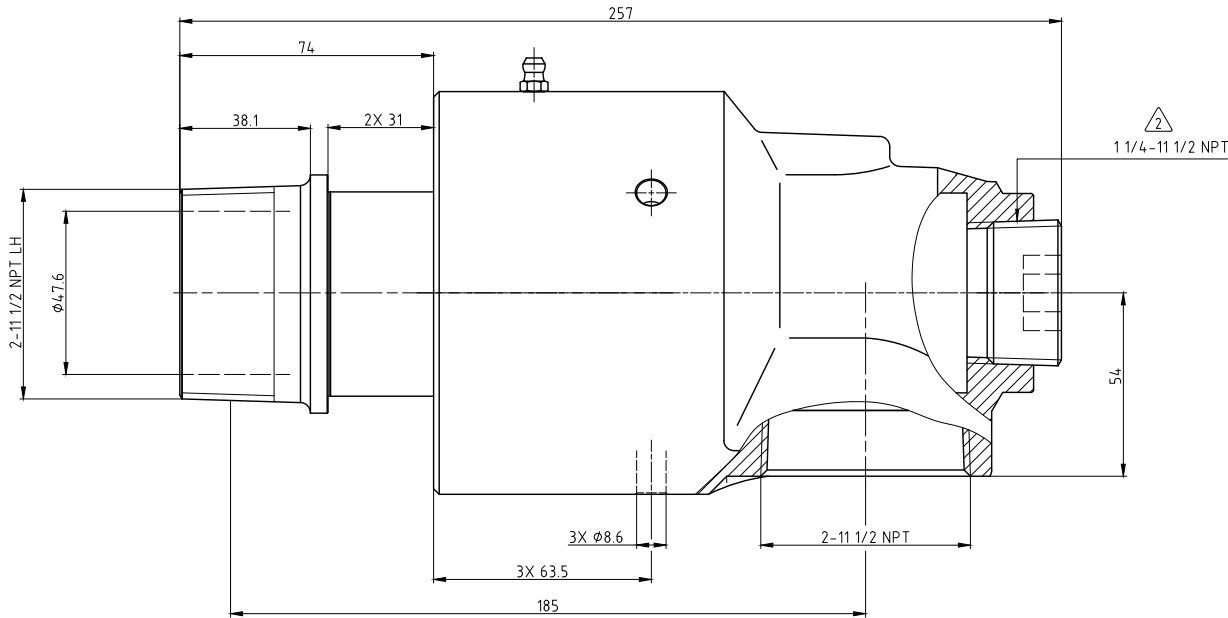


NOTES:
1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550
2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

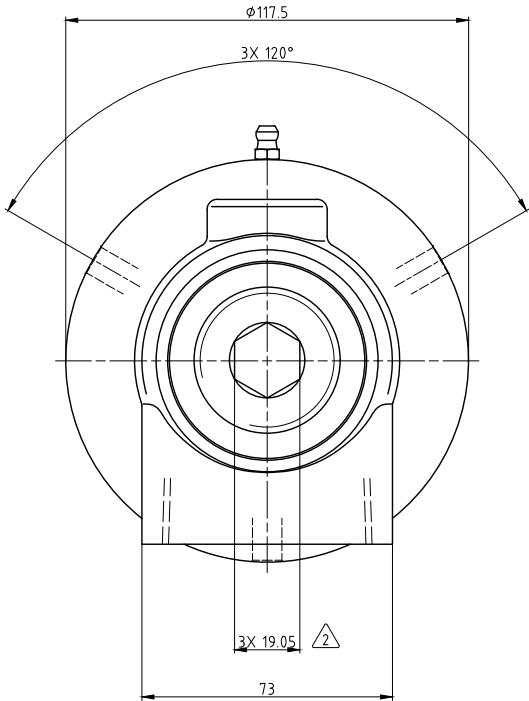

OPERATING DATA		
MEDIA	WATER	THERMAL OIL
PRESSURE MAX.	20 bar	6.6 bar
SPEED MAX.	750 min ⁻¹	
TEMPERATURE MAX.	93 °C	
DRY RUN (WITHOUT ANY MEDIA)	NO	
RECOMMENDED FILTRATION	60 micron	

		PROJECTION	SCALE: 1:1
		MATERIAL	INTERFACE CONTROL DRAWING
		TITLE	DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung
		NO.	657-050-117
		SHEET	A2
		UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE	
ISSUE	MODIFICATION	ECO	DATE
			SIGN