
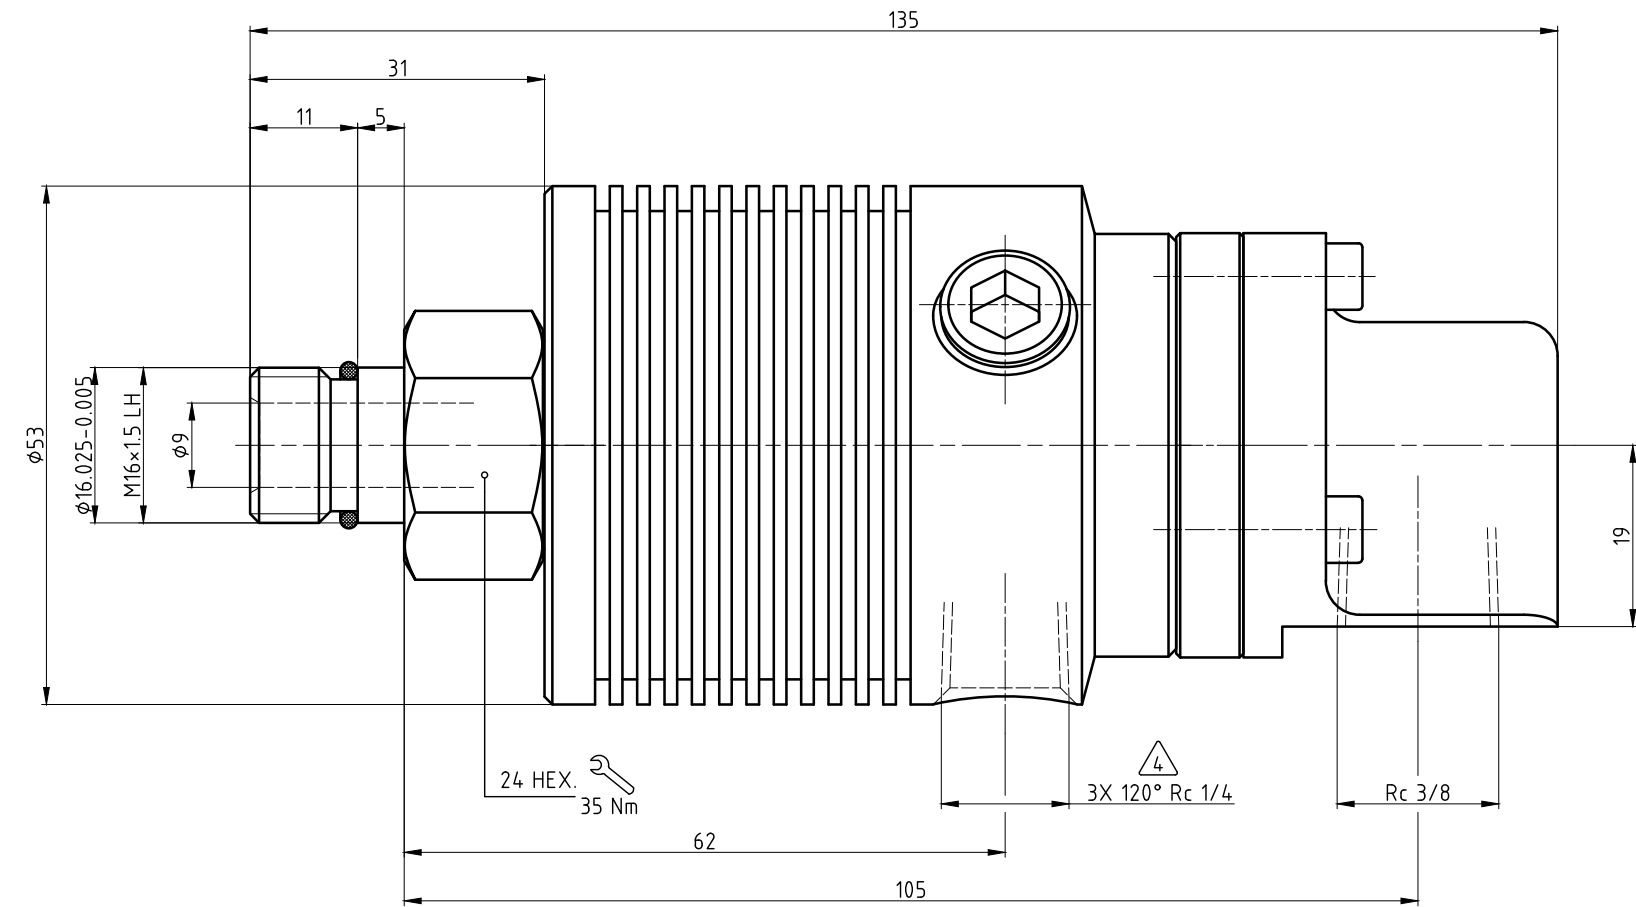



NOTES:

- 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-552


-  - SPINDLE BEARING ARRANGEMENT
 - ROUNDED
 - DRAIN PORT

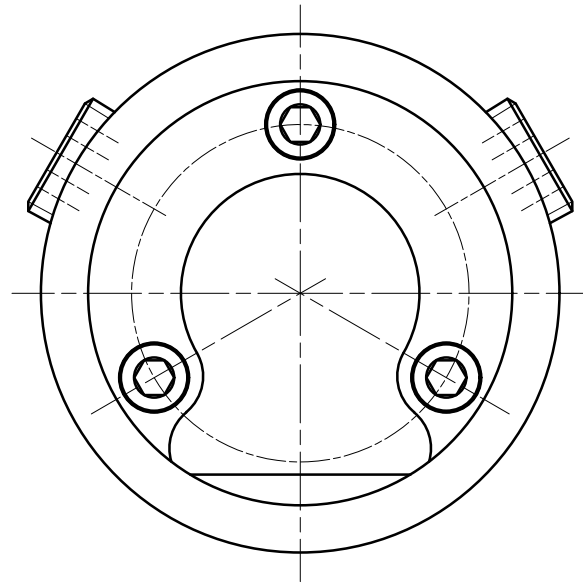

CUSTOMER INTERFACE

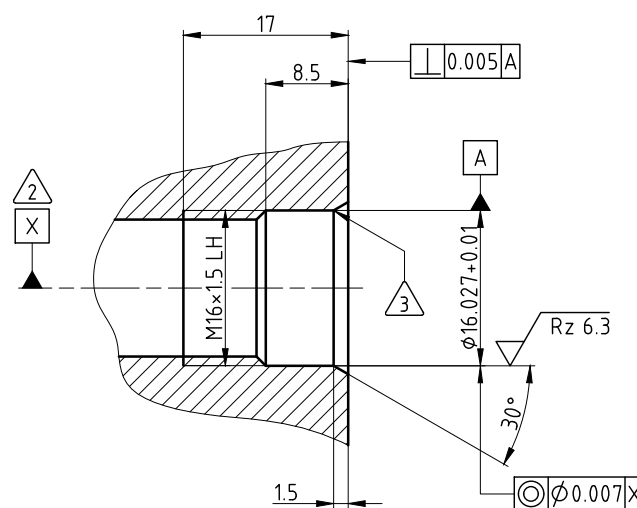

OPERATING DATA		
MEDIA	COOLANT	ML
PRESSURE MAX.	105 bar	10 bar
SPEED MAX.	20000 min ⁻¹	20000 min ⁻¹
TEMPERATURE MAX.	70 °C	70 °C
FLOW RATE MAX.	82 l/min	2180 ml/min
DRY RUN	UNLIMITED	

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1		A
							MATERIAL: INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung		
					DRN. 24.08.2011	FD			
					ENGR. 24.08.2011	CW			
					APPD.				
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE			NO. 1109-040-192	SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN					