
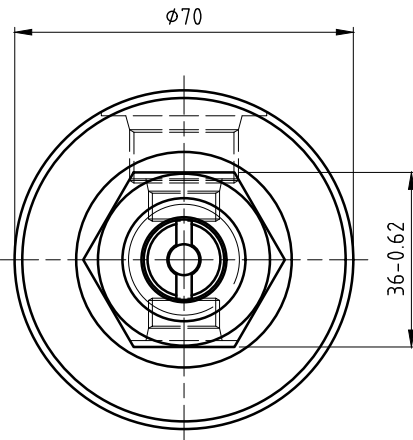
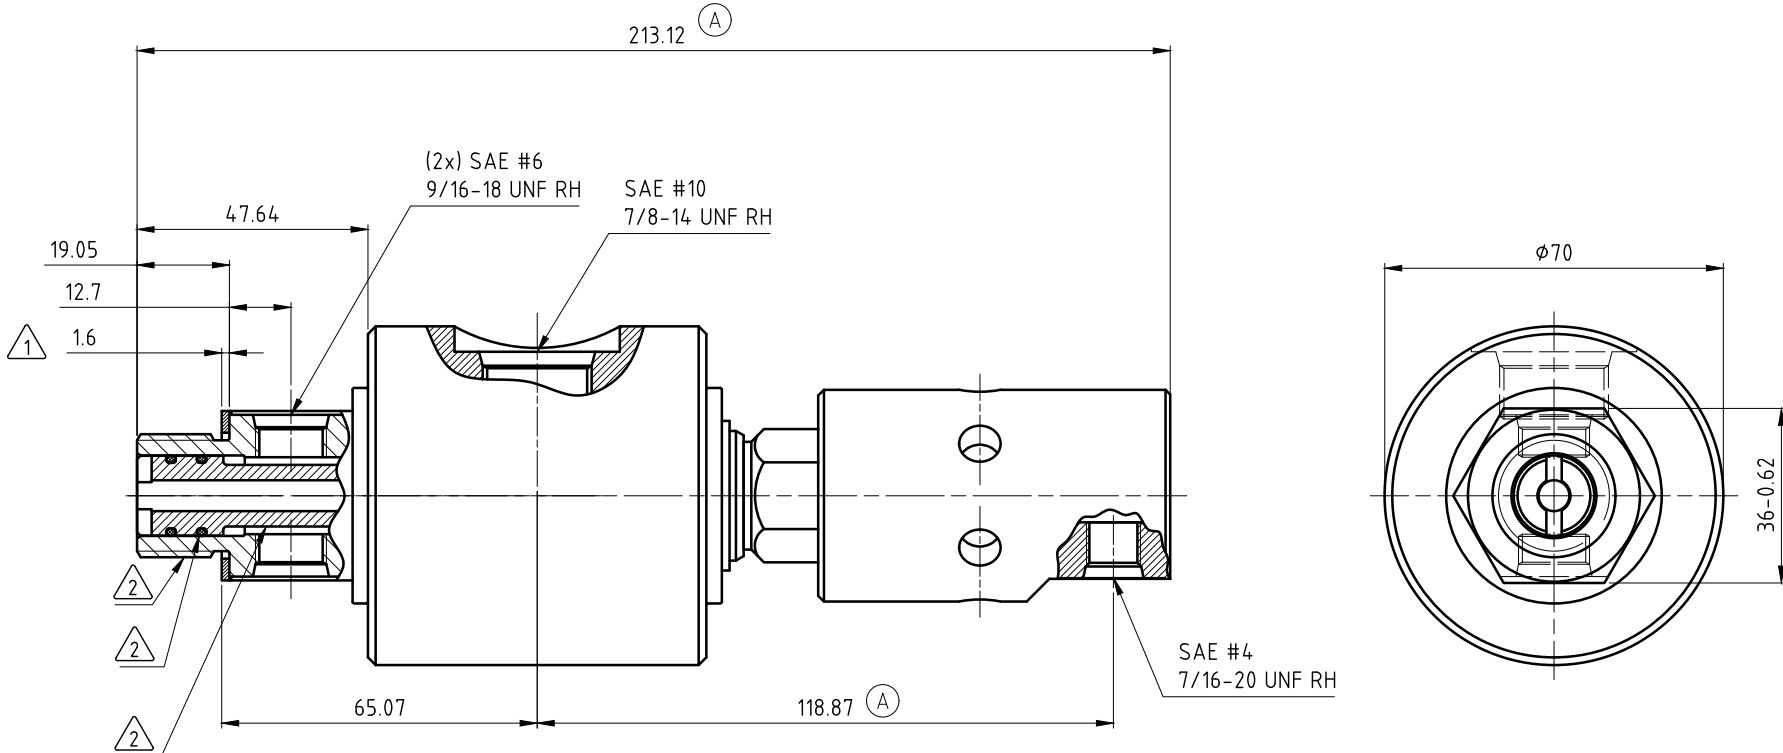


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES: (A)

- 1 - GASKET THICKNESS.
- 2 - ITEMS COMPRISE THE 2117-120 ROTOR ASSEMBLY.
- 3 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 2117-056-120.
- 4 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.

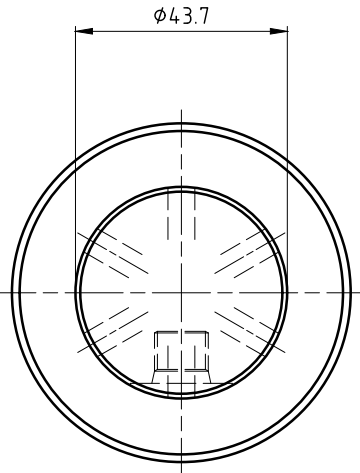

(A)

4 OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX HYD. PRESSURE	1000 PSI	70 bar
MAX SPEED	250 RPM	250/min
MAX TEMPERATURE	250°F	121°C
DRY RUN	NO	
REQUIRED FILTRATION	25 microns	

(A)

 DEUBLIN® Engineered for Performance					PROJECTION: 		SCALE: 1:1			
							MATERIAL:	CUSTOMER INTERFACE DRAWING		
					DATE	NAME	TITLE: CUSTOMER INTERFACE DRAWING FOR UNION 2117-056-120			
					DRN. 08/23/2018	RMika				
					ENGR.					
					APPD.					
A	CHG TANDEN UNION	048660	08/18	RMika	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE					SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN						
					NO. 2117-056-120					