
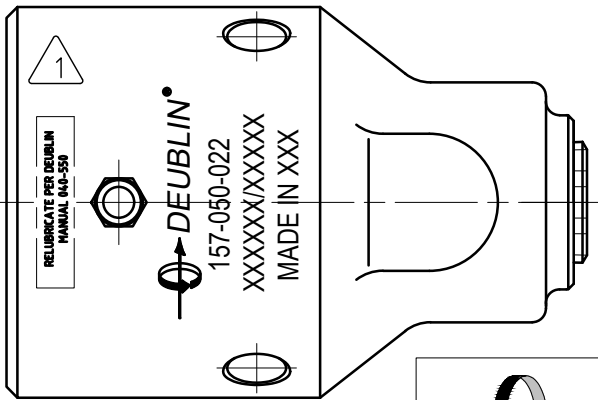


CONFIDENTIAL
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

NOTES:


- 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550
- 2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.
- 3 - DEPENDING ON COUNTRY OF ORIGIN, HEX STOCK MAY VARY AS NOTED. SEE TABLE
FOR ACCEPTABLE WRENCH SIZES.

4 - GASKET THICKNESS.

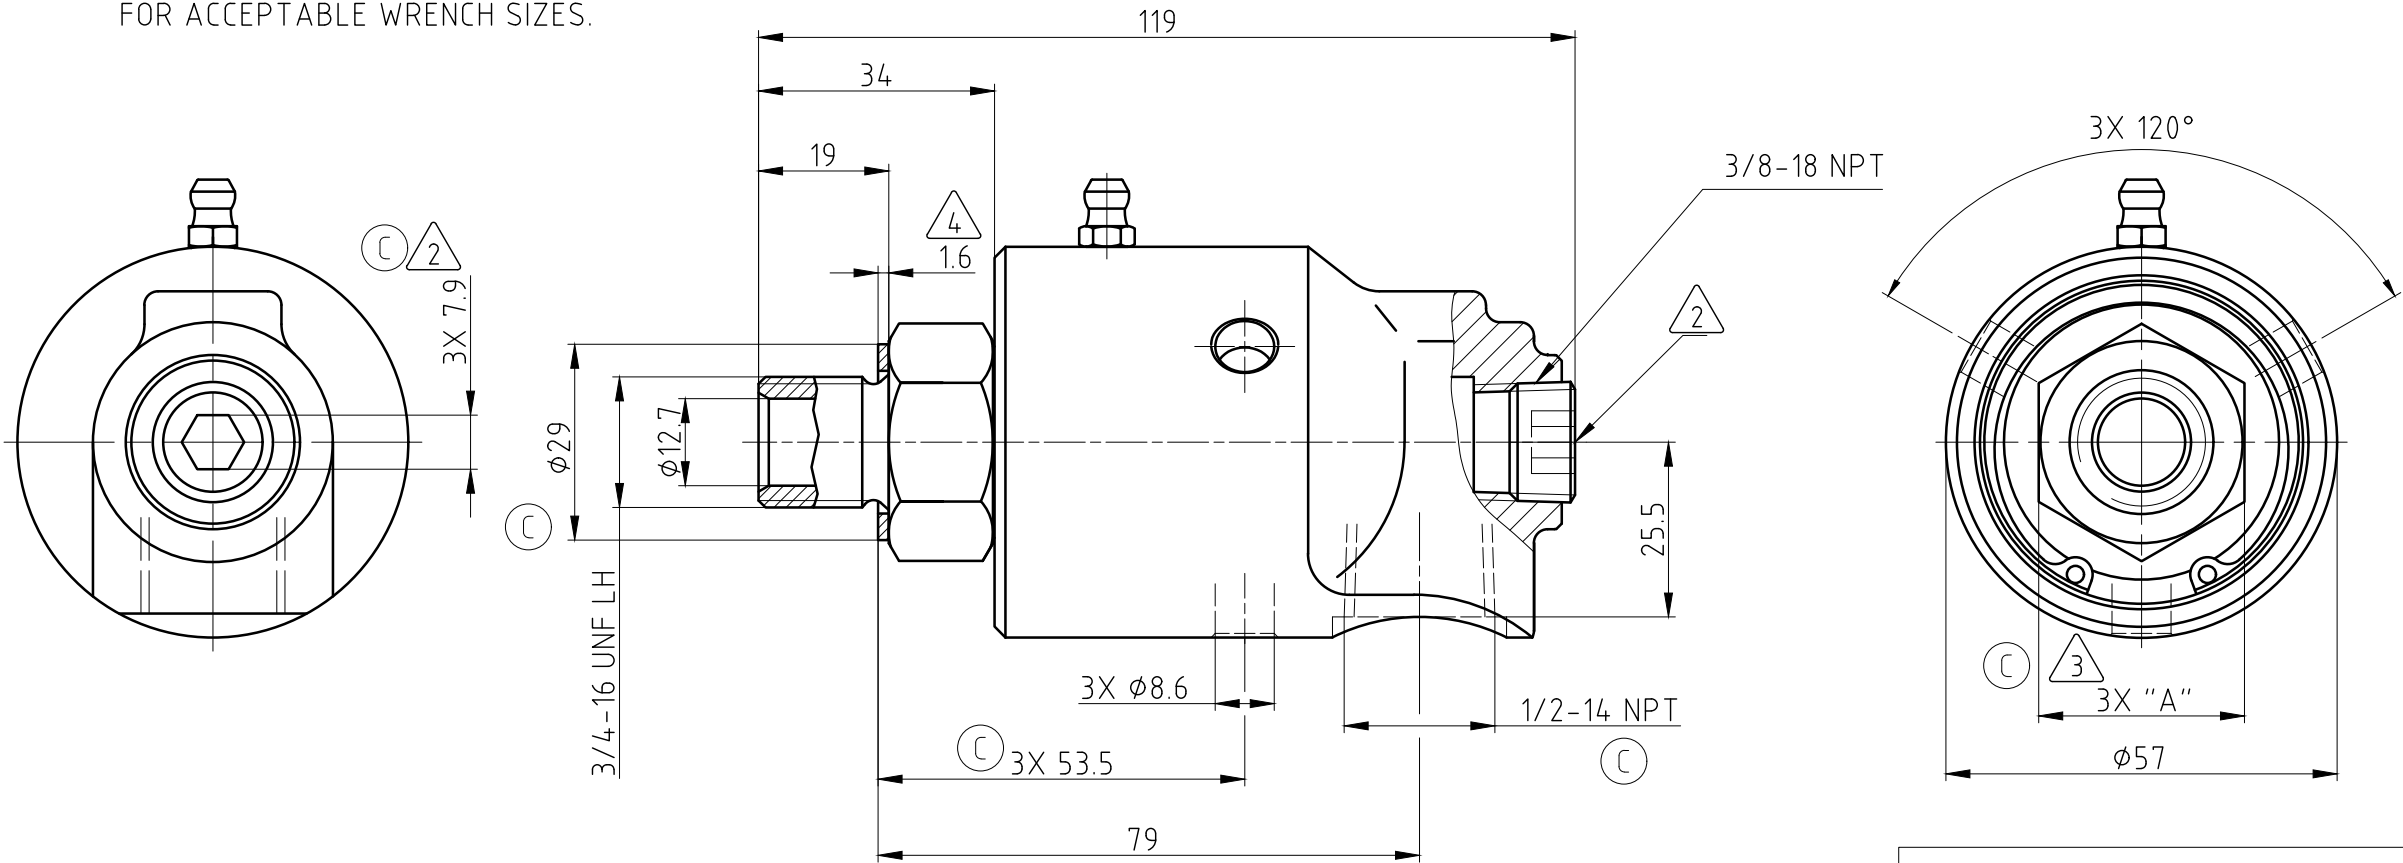

OPERATING DATA		
MEDIA	WATER	THERMAL OIL
PRESSURE MAX.	50 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹	
TEMPERATURE MAX.	93 °C	
DRY RUN (WITHOUT ANY MEDIA)	NO	
RECOMMENDED FILTRATION	60 micron	

 HEX SIZES		WRENCHES	
UNITS	"A"	 30mm	 1 1/8"
METRIC [mm]	30-0.13	✓	☒
IMPERIAL [in]	.125-0.006	✓	✓



PROJECTION:

SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE:

DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO.

157-050-022

SHEET
A3

ISSUE/	MODIFICATION	ECO	DATE	SIGN
C	SEE ECO	058092	11/20	MSk
B	SEE ECO	056931	08/20	RMika
A	SEE ECO	056039	05/20	MZe

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE