NOTES:
1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1890–100.

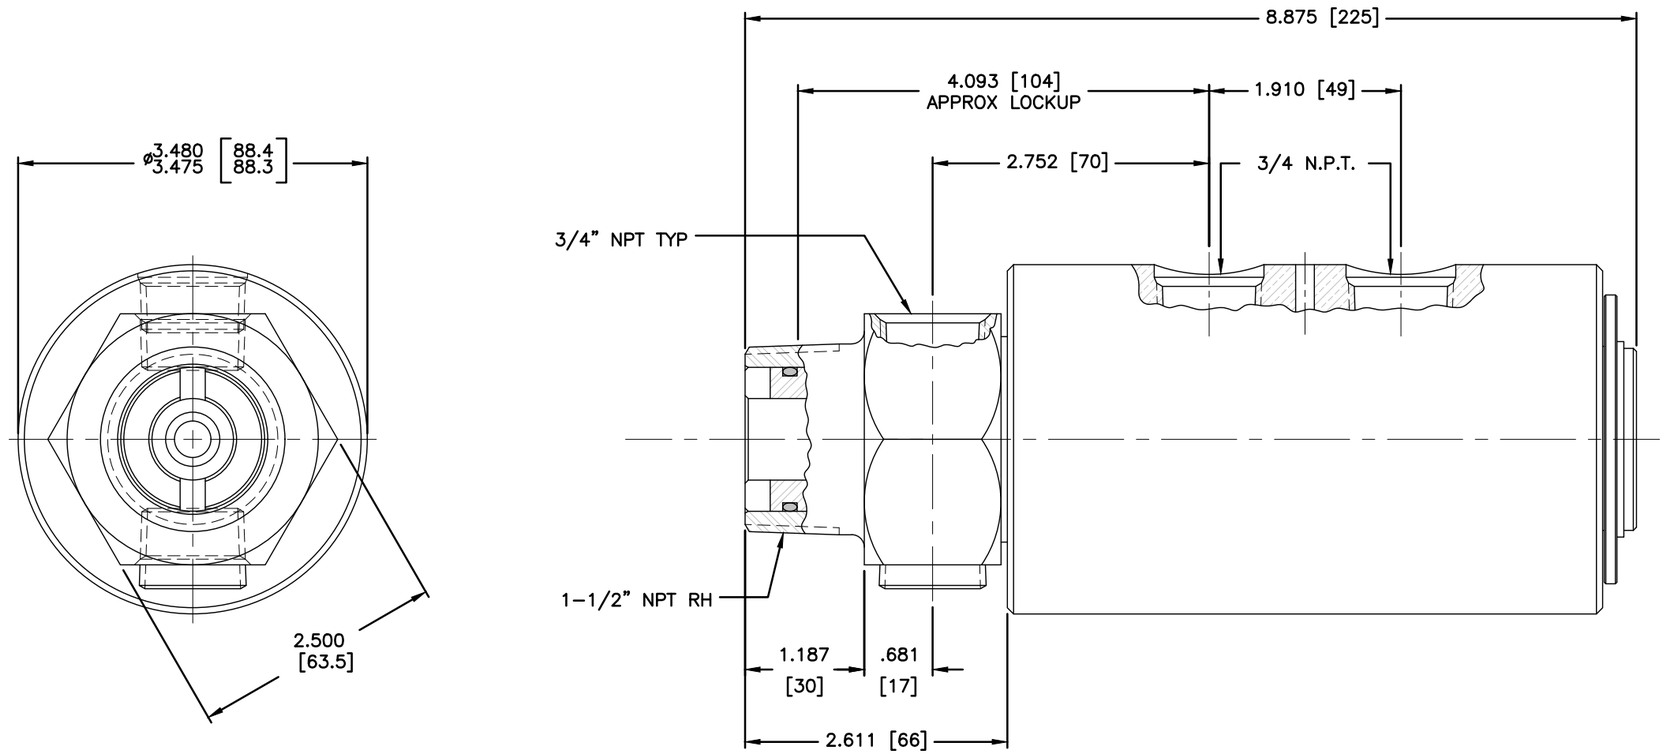

OPERATING DATA:

150 P.S.I. (10 BAR) MAX. AIR PRESSURE
28"Hg (6,7 kPa) MAX. VACUUM PRESSURE
3000 P.S.I. (204 BAR) MAX. HYDRAULIC PRESSURE
250°F (121°C) MAX. TEMPERATURE
250 R.P.M. (250/M) MAX. SPEED

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

LET.	REVISION	ECO	DATE	SIGN
A	REMOVED INTERNAL DETAIL	EGR	09/03	RM

EQUIPMENT REF:

ASSY/TEST FIXTURES REQUIRED:

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE

DIMENSIONS IN [ ] ARE IN MILLIMETERS.

SCALE	FULL	DWG SIZE C
DRN	RM	09/17/03
ENGR	ARS	09/17/03
APPD	ARS	09/17/03

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL DRAWING FOR DEUBLIN UNION 1890–100

NO. 1890–100–IC C.A.D DRAWING