CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-563

△2 - DRAIN PORT.

△3 - LOADING SLOT.

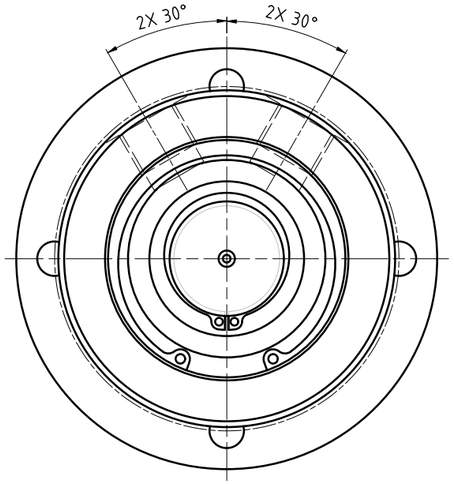

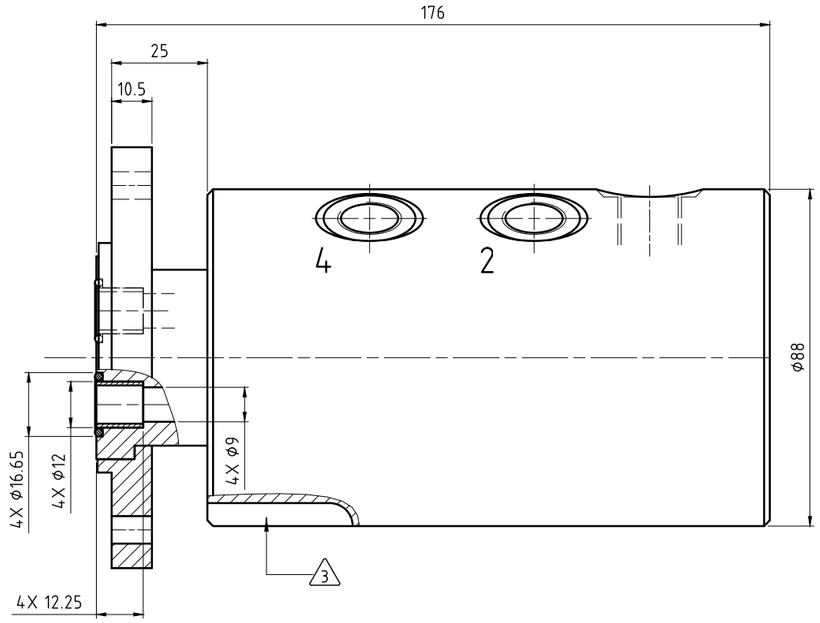

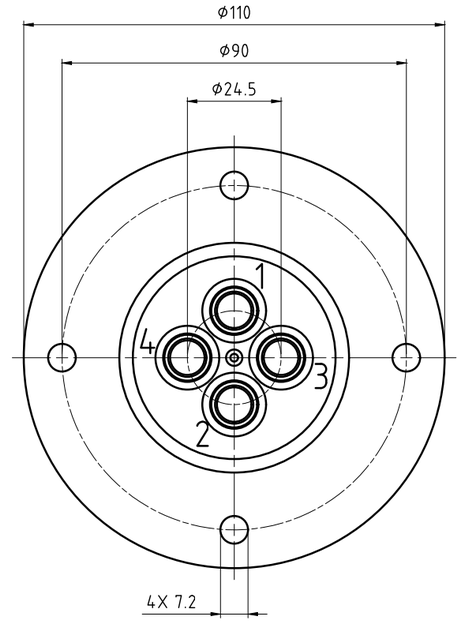

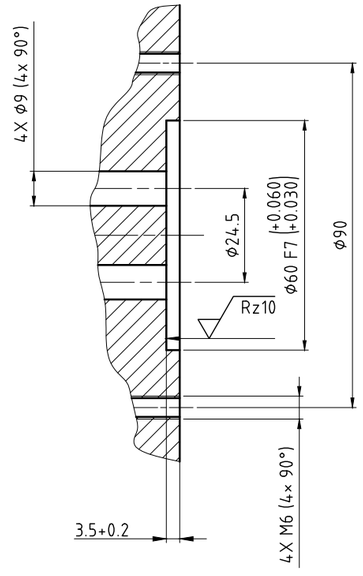

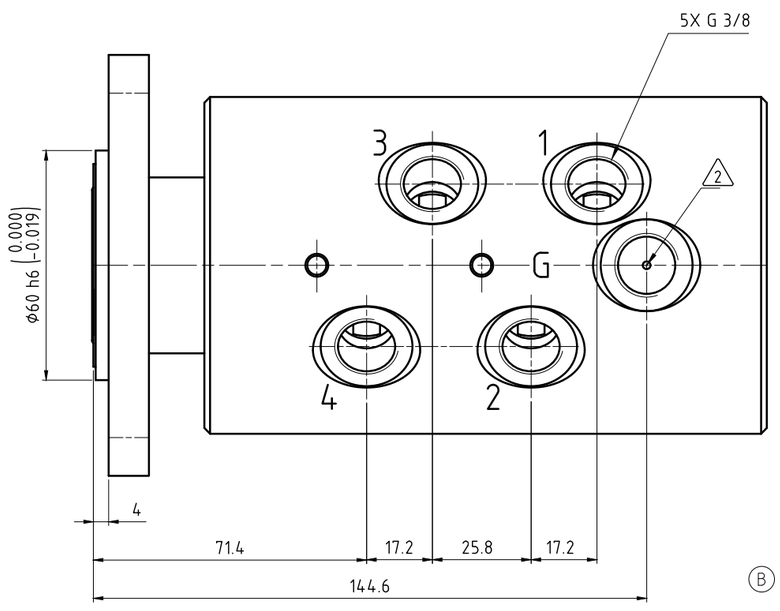

CUSTOMER INTERFACE

OPERATING DATA				
MEDIA	AIR	VACUUM	OIL	OIL
PRESSURE MAX.	10 bar	6.7 kPa	60 bar	250 bar
SPEED MAX.	250 min^{-1}			10 min^{-1}
TEMPERATURE MAX.	121 °C			
DRY RUN (WITHOUT ANY MEDIA)	POSSIBLE			

DEUBLIN® Engineered for Performance

PROJECTION:

SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO. 1379-250

SHEET A2

		DATE	NAME
DRN.		06.03.2019	MKi
ENGR.		06.03.2019	CW
APPD.			

ISSUE	MODIFICATION	ECO	DATE	SIGN
A	REDRAWN	051106	03/19	MKi

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE