
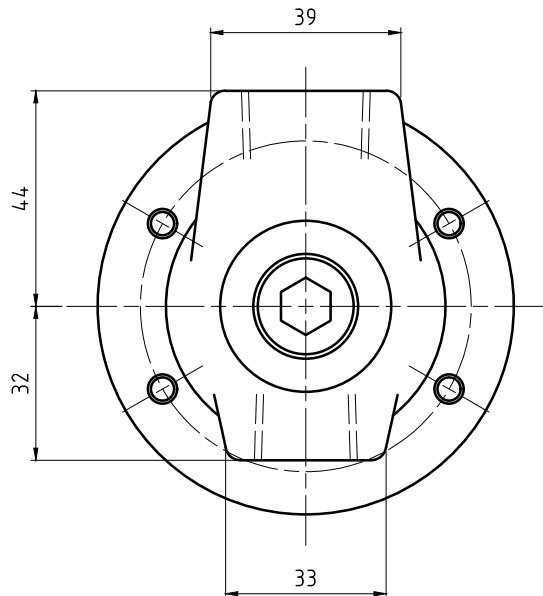
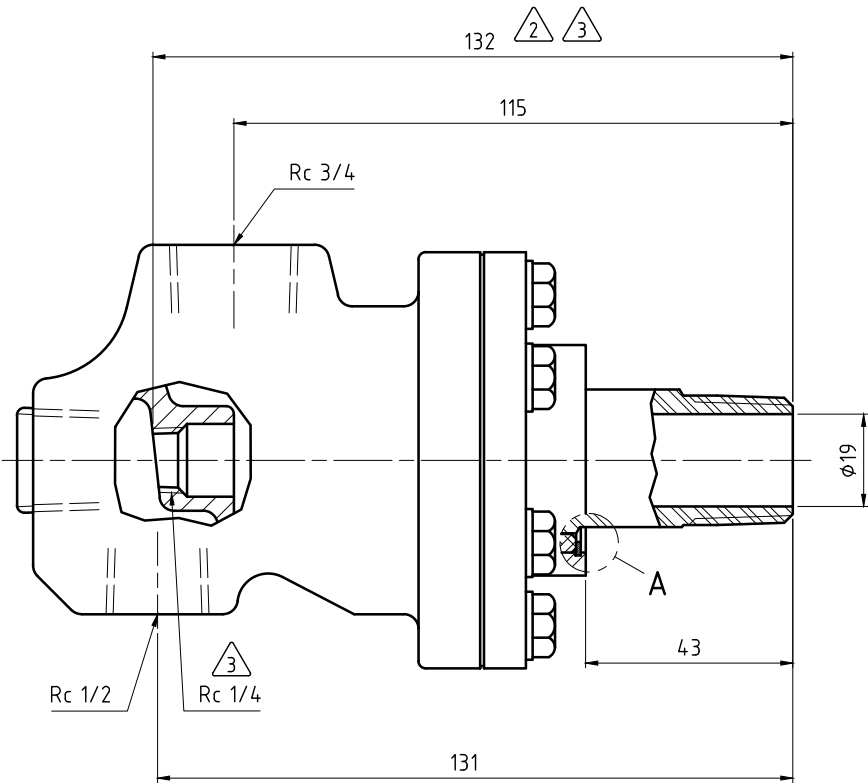



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:


- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
2 - PIPE LENGTH.
3 - PIPE SUPPLIED BY CUSTOMER.
4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

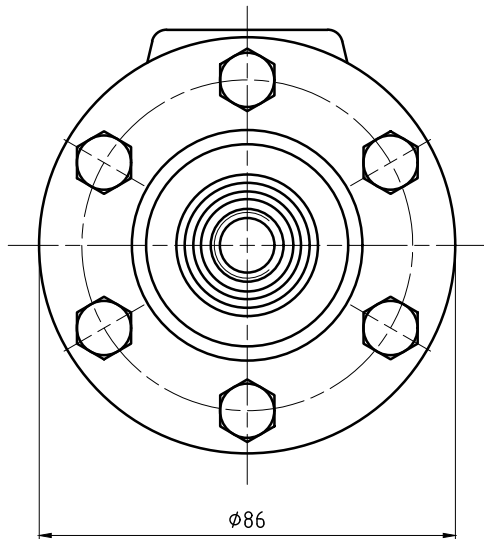

A (4:1)



"X" SEAL WEAR DETAIL

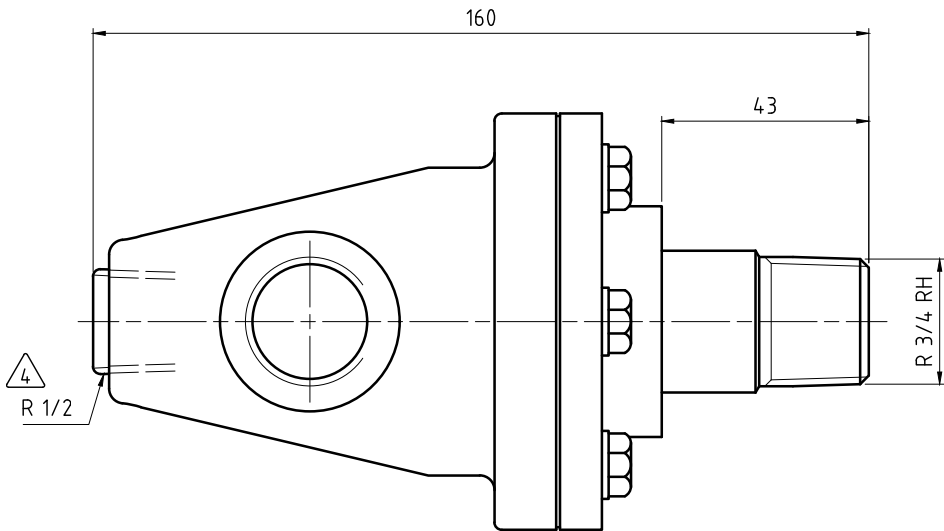

OPERATING DATA

MEDIA	STEAM	
PRESSURE	MAXIMUM	17.2 bar
TEMPERATURE	MAXIMUM	208 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN	NO	



PROJECTION:

SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

DATE

NAME

DRN. 07/11/16 N. Reyna

ENGR. 07/11/16 T. Wilson

APPD.

TITLE:

DEUBLIN UNION

NO.

BC-54000-12-50B

SHEET

A2

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE MODIFICATION ECO DATE SIGN