


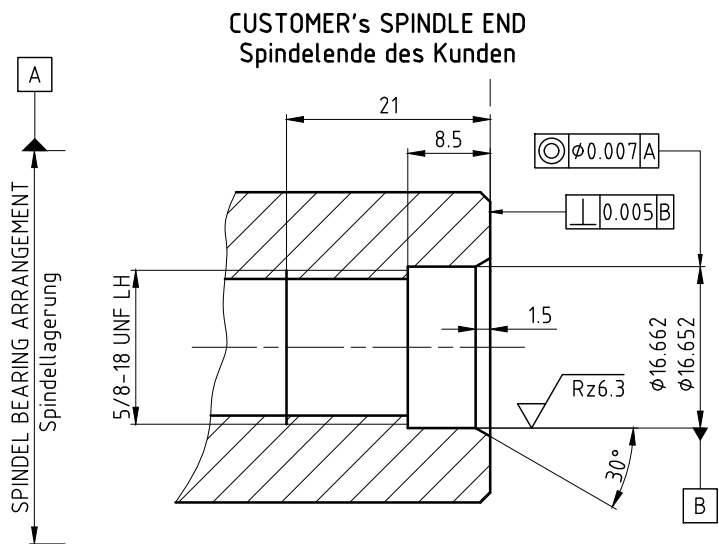


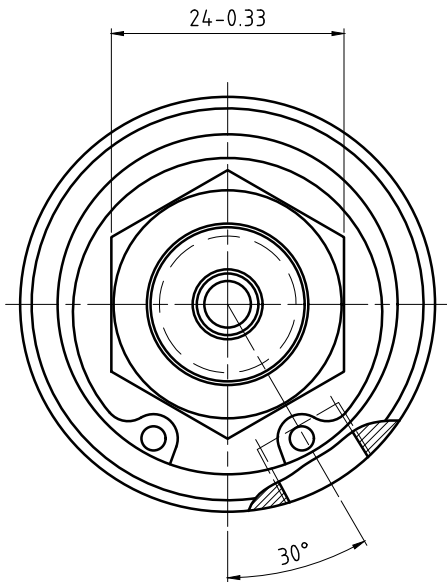

OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
IF THE OPERATING CONDITIONS ARE CLOSE TO THESE LIMITS, LOOK ON THE DIAGRAM.
Max. Druck und max. Drehzahl gleichzeitig sind zu vermeiden. Zuordnung
siehe Diagramm.

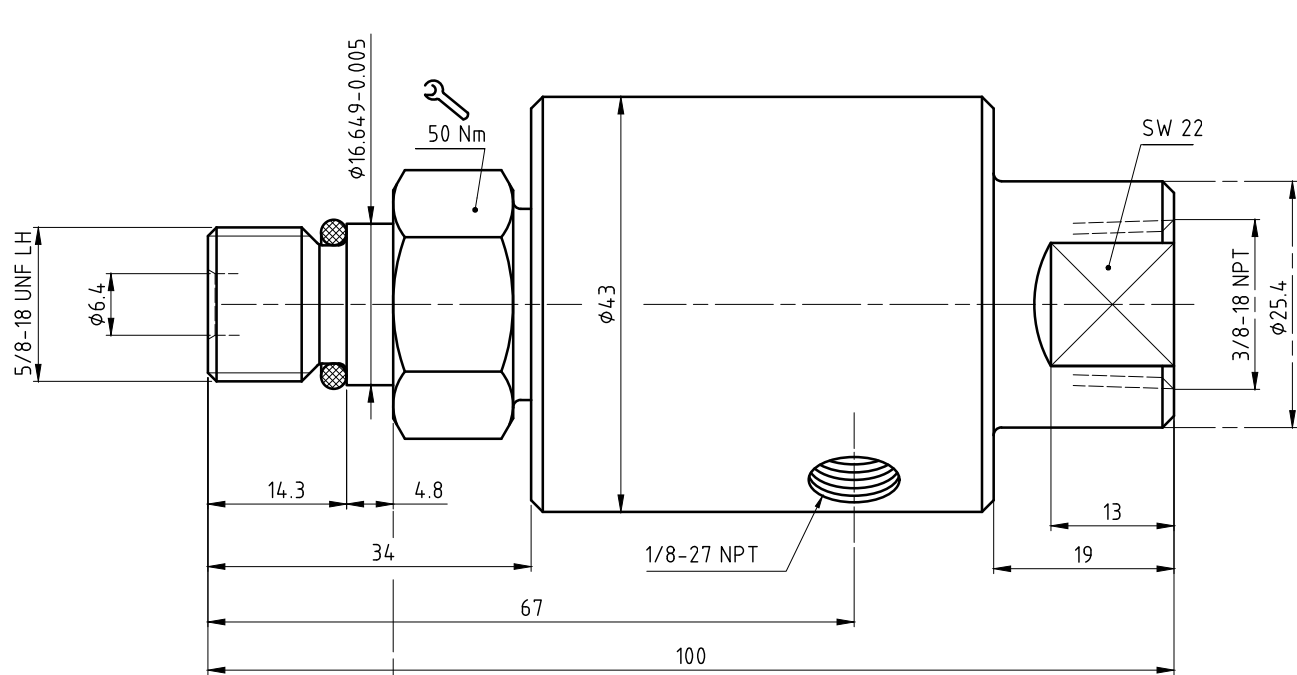

OPERATING DATA / Betriebsdaten		
MEDIA/Medium	COOLANT	KSS
p max.	1500 PSI	105 bar
n max.	15000 RPM	15000 1/min
t max.	160 °F	70 °C
Q max.	5.3 GPM	20 l/min
FILTRATION/Filterung	60 µm	60 µm

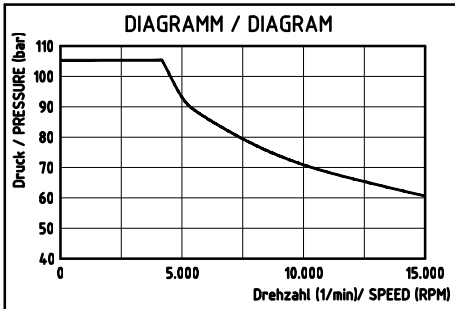

PROJECTION:
SCALE: 2:1
MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME	TITLE:
DRN. 01/12/11	RM	DEUBLIN ROTATING UNION
ENGR. 01/12/11	RM	DEUBLIN Drehdurchführung
APPD.		
ISSUE	MODIFICATION	ECO
DATE	SIGN	

NO. 1101-262-238

SHEET
A2