
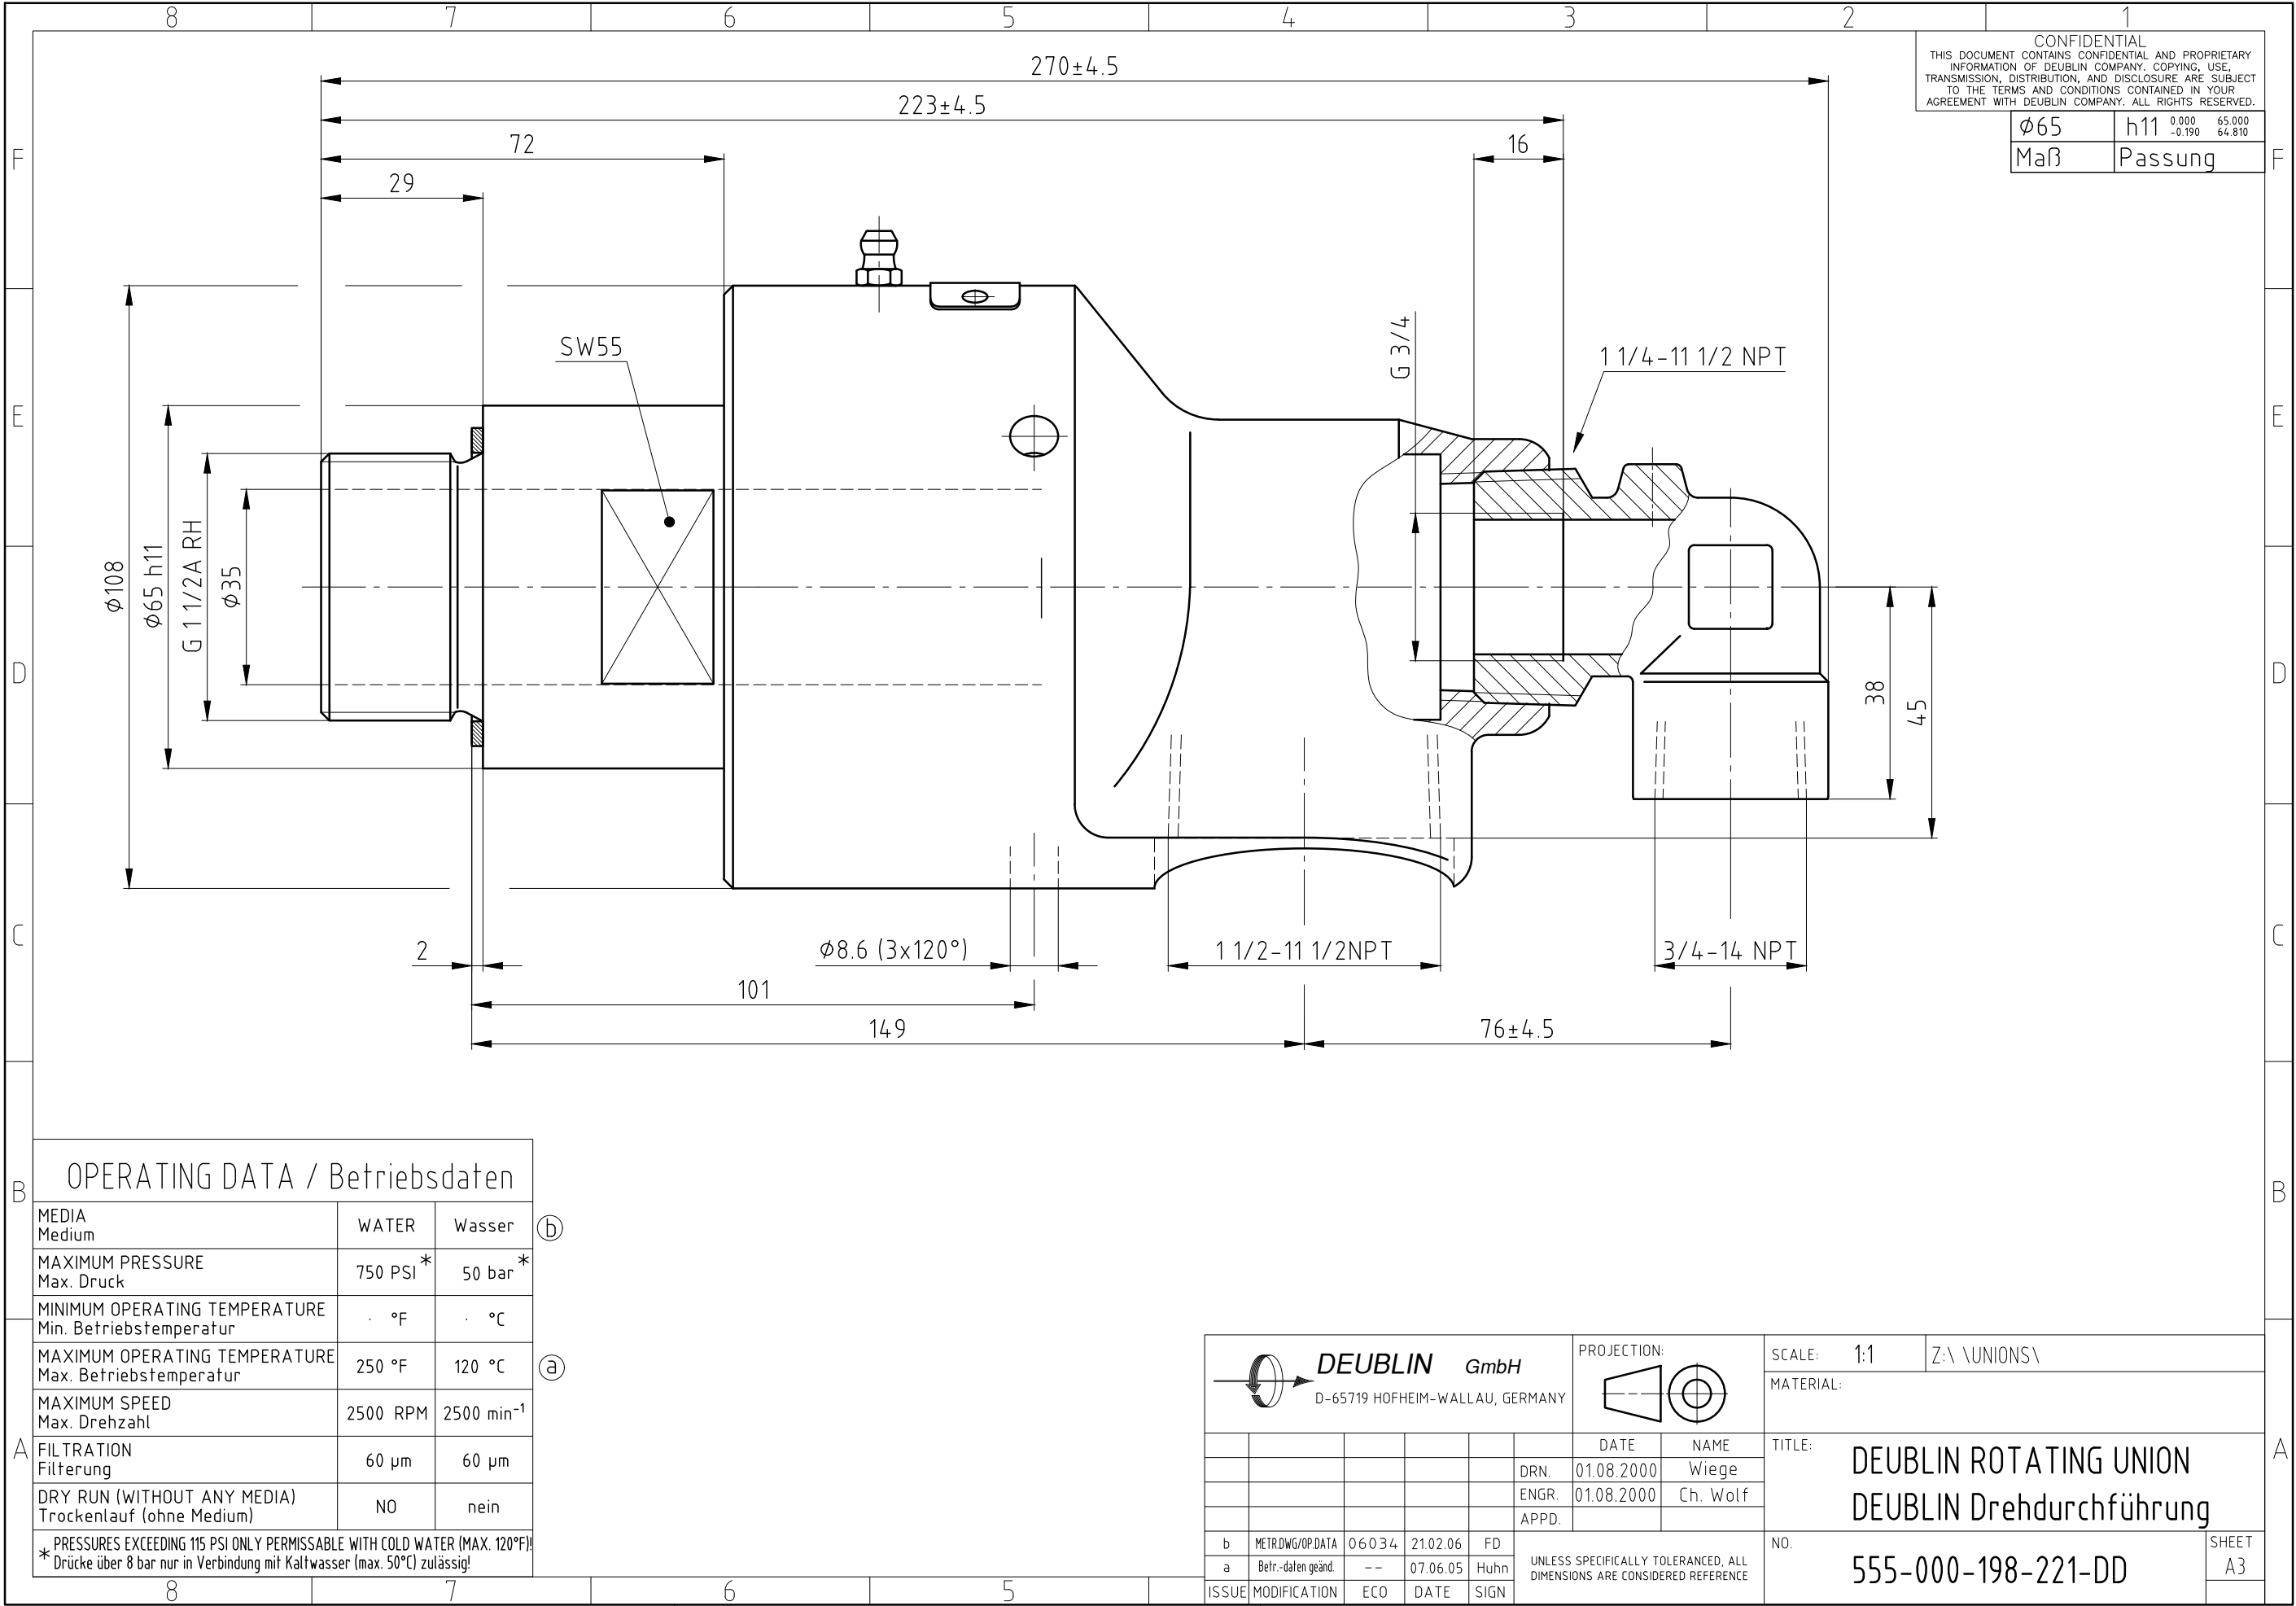





CONFIDENTIAL THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.			
Ø65	h11	0.000	65.000
Maß	Passung	-0.190	64.810

OPERATING DATA / Betriebsdaten		
MEDIA Medium	WATER	Wasser
MAXIMUM PRESSURE Max. Druck	750 PSI *	50 bar *
MINIMUM OPERATING TEMPERATURE Min. Betriebstemperatur	. °F	. °C
MAXIMUM OPERATING TEMPERATURE Max. Betriebstemperatur	250 °F	120 °C
MAXIMUM SPEED Max. Drehzahl	2500 RPM	2500 min ⁻¹
FILTRATION Filterung	60 µm	60 µm
DRY RUN (WITHOUT ANY MEDIA) Trockenlauf (ohne Medium)	NO	nein
* PRESSURES EXCEEDING 115 PSI ONLY PERMISSABLE WITH COLD WATER (MAX. 120°F) Drücke über 8 bar nur in Verbindung mit Kaltwasser (max. 50°C) zulässig!		

 DEUBLIN <i>GmbH</i> D-65719 HOFHEIM-WALLAU, GERMANY					PROJECTION: 		SCALE: 1:1		Z:\ \UNIONS\		
							MATERIAL:				
					DATE	NAME	TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung				
					DRN. 01.08.2000	Wiege					
					ENGR. 01.08.2000	Ch. Wolf					
					APPD.			NO. 555-000-198-221-DD			
b	METR.DWG/OP.DATA	06034	21.02.06	FD	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						
a	Betr.-daten geänd.	--	07.06.05	Huhn							
ISSUE	MODIFICATION	ECO	DATE	SIGN			SHEET A3				