
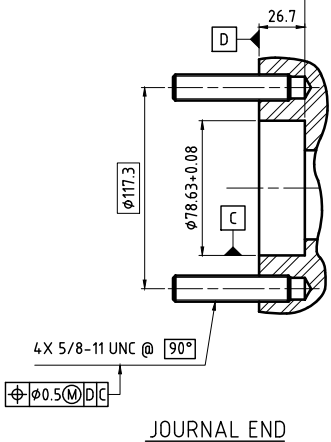

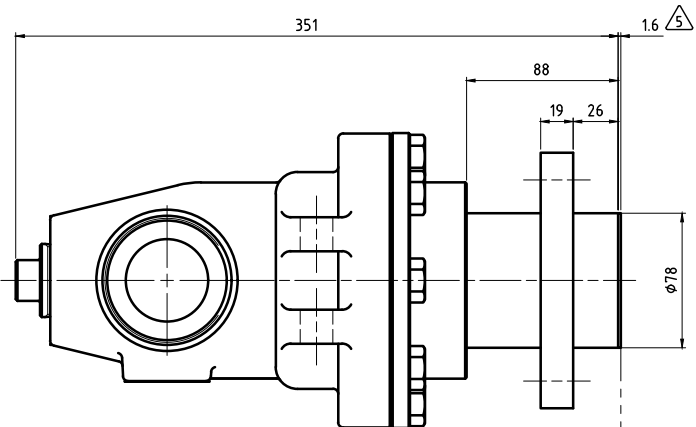
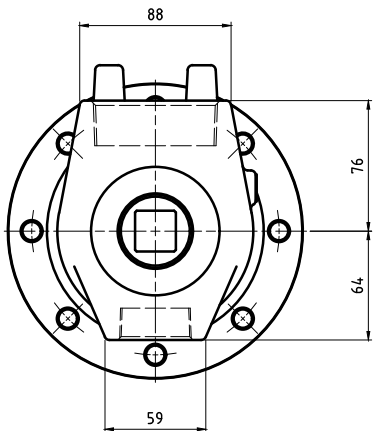
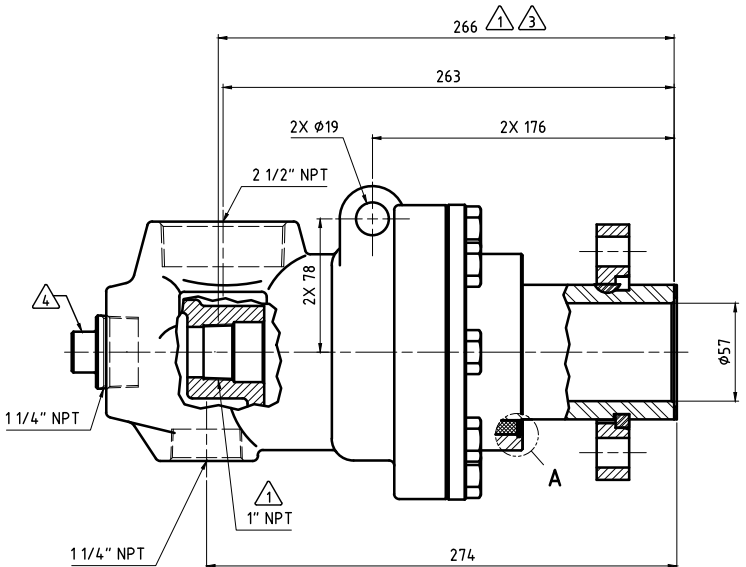


NOTES:

- 1 - PIPE LENGTH INTO UNION.
2 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
3 - PIPE SUPPLIED BY CUSTOMER.
4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
5 - GASKET THICKNESS.

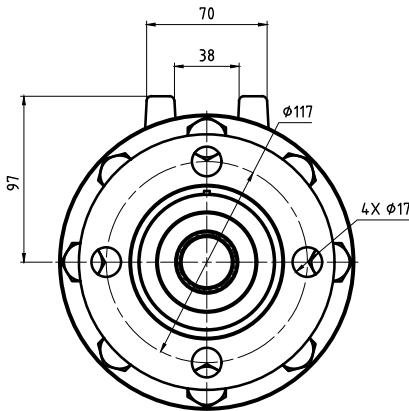

OPERATING DATA		
MEDIA		THERMAL OIL
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	350 min ⁻¹
DRY RUN		NO

		PROJECTION:	SCALE: 1:2
		MATERIAL:	INTERFACE CONTROL DRAWING
		TITLE:	DEUBLIN UNION
		NO.	BC-54000-40-30
		SHEET	A2
		UNLESS SPECIFICALLY TOLERANCES, ALL DIMENSIONS ARE CONSIDERED REFERENCE	
ISSUE	MODIFICATION	ECO	DATE SIGN