


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

ϕ18	g5	-0.006	17.994
M a B	Toleranz	-0.014	17.986

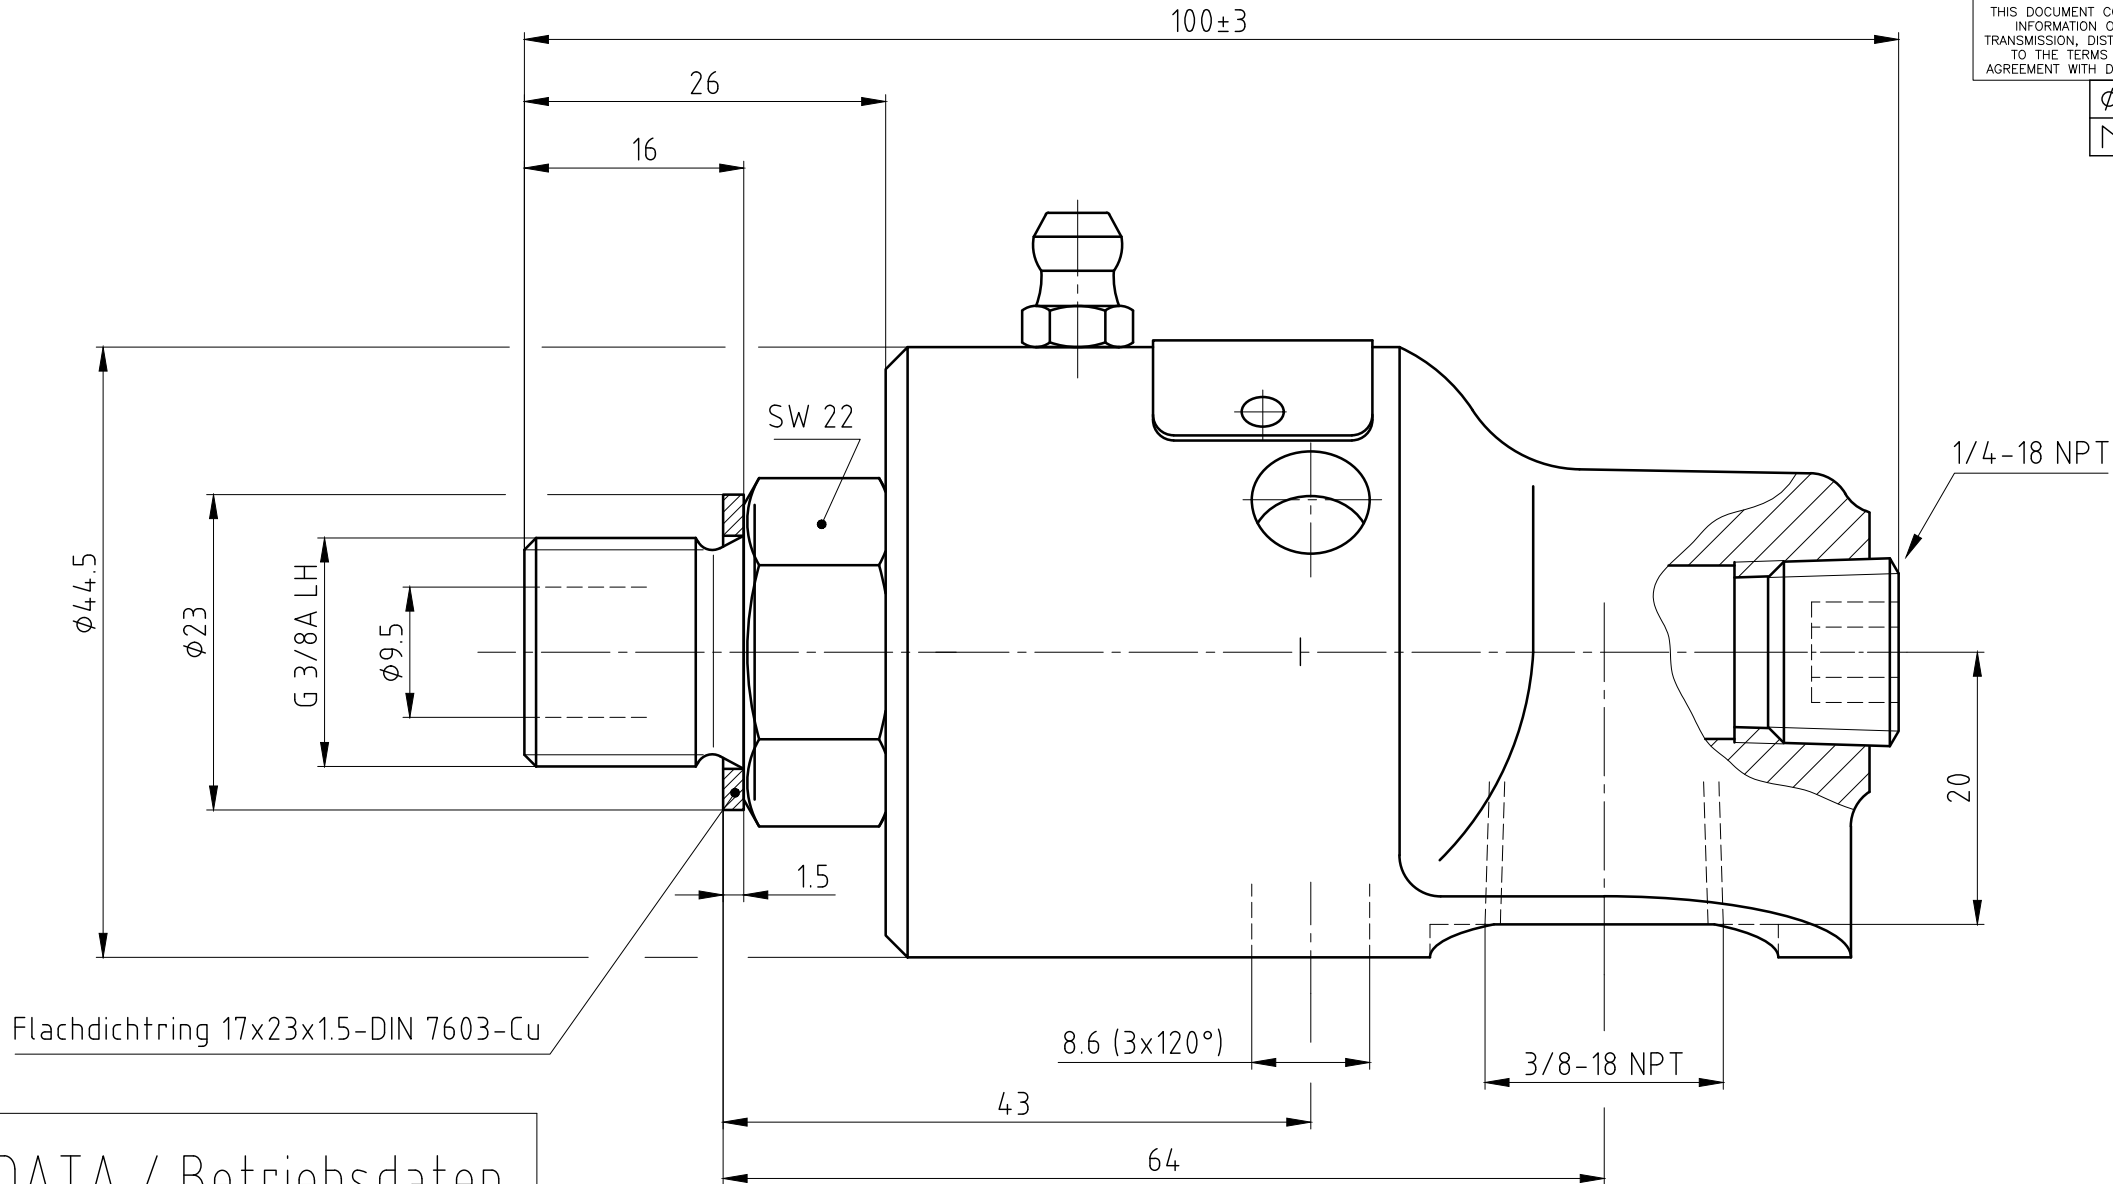

OPERATING DATA / Betriebsdaten		
MEDIA Medium	WATER	Wasser
MAXIMUM PRESSURE Max. Druck	750 PSI *	50 bar *
MINIMUM OPERATING TEMPERATURE Min. Betriebstemperatur	°F	°C
MAXIMUM OPERATING TEMPERATURE Max. Betriebstemperatur	250 °F	120 °C
MAXIMUM SPEED Max. Drehzahl	3500 RPM	3500 min ⁻¹
FILTRATION Filterung	60 µm	60 µm
DRY RUN (WITHOUT ANY MEDIA) Trockenlauf (ohne Medium)	NO	nein
* PRESSURES EXCEEDING 115 PSI ONLY PERMISSABLE WITH COLD WATER (MAX. 120°F)!		
* Drücke über 8 bar nur in Verbindung mit Kaltwasser (max. 50°C) zulässig!		

DEUBLIN GmbH
D-65719 HOFHEIM-WALLAU, GERMANY

PROJECTION:

SCALE: 2:1
Z:\ \UNIONS\

MATERIAL:

					DATE	NAME	TITLE:
				DRN.	24.09.2002	H.-J.Huhn	DEUBLIN ROTATING UNION
				ENGR.	24.09.2002	Ch.Wolf	DEUBLIN Drehdurchführung
				APPD.			
							NO.
a	METRDWG/OPDATA	06034	21.02.06	FD	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		SHEET
ISSUE	MODIFICATION	ECO	DATE	SIGN			A3

55-000-095-DD