





NOTES:

- ⚠ - TORQUE BOLTS TO 20-30 FT-LBS (27-41 Nm) AND SAFETY WIRE.
 2 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER 6400-030-387.

OPERATING DATA:

WATER SERVICE

150 P.S.I.(10 BAR) MAX.
 750 R.P.M.(750/MIN) MAX.
 250°F.(121°C) MAX.
 TORQUE AT 150 P.S.I.=10 FT.LBS.
 FLOW RATE = 700 GPM ^(A)

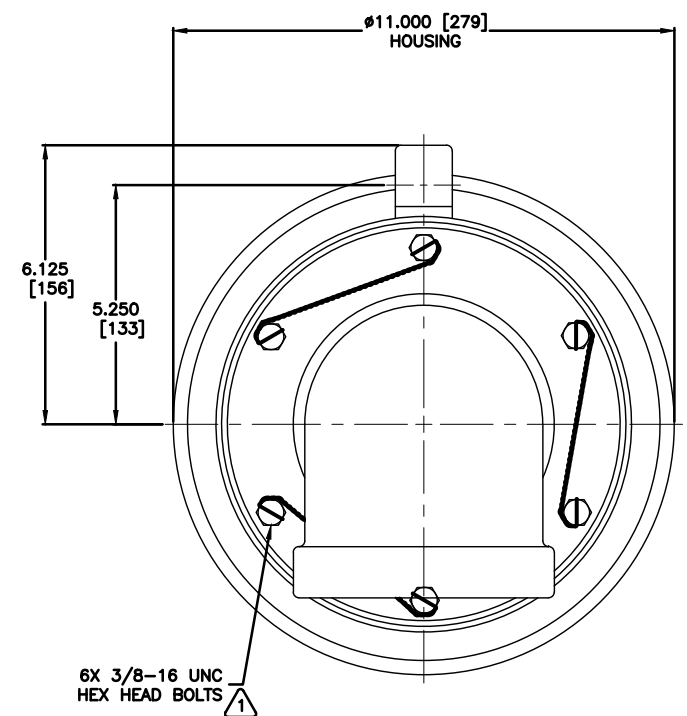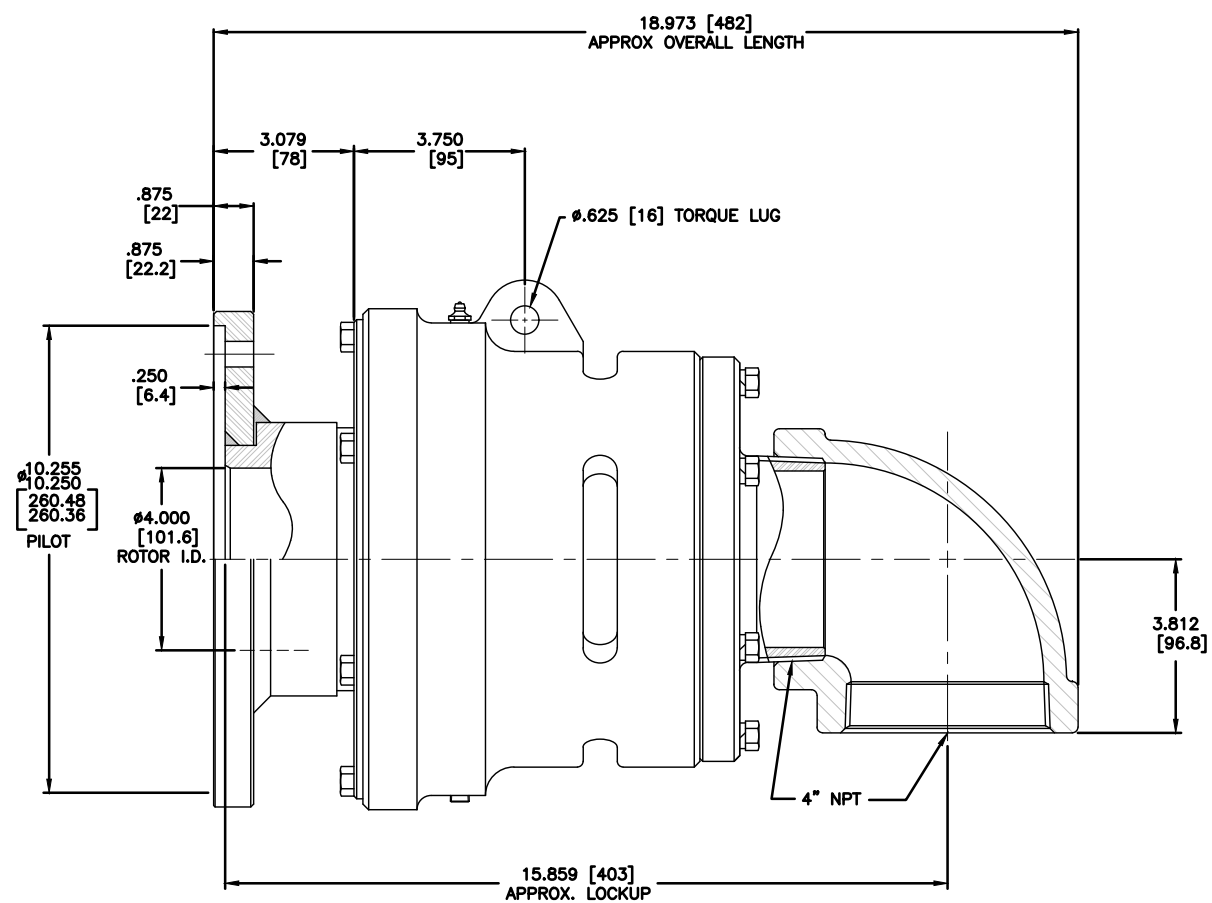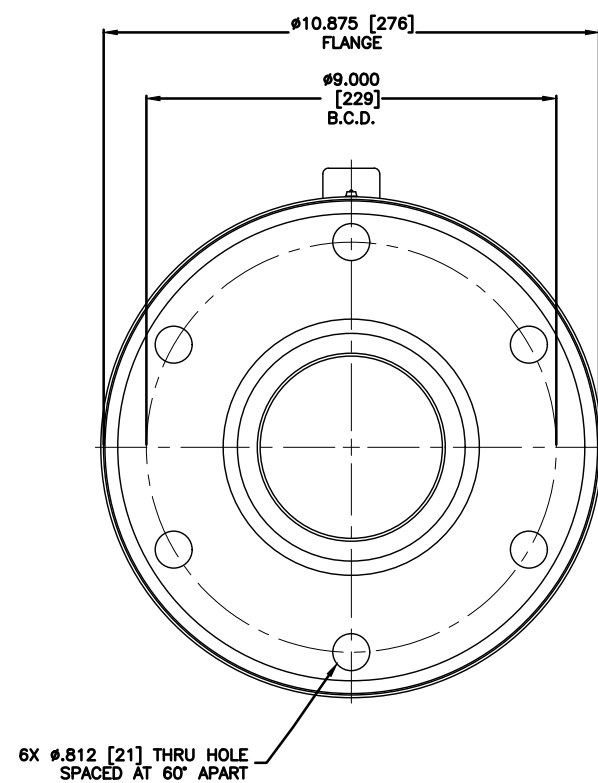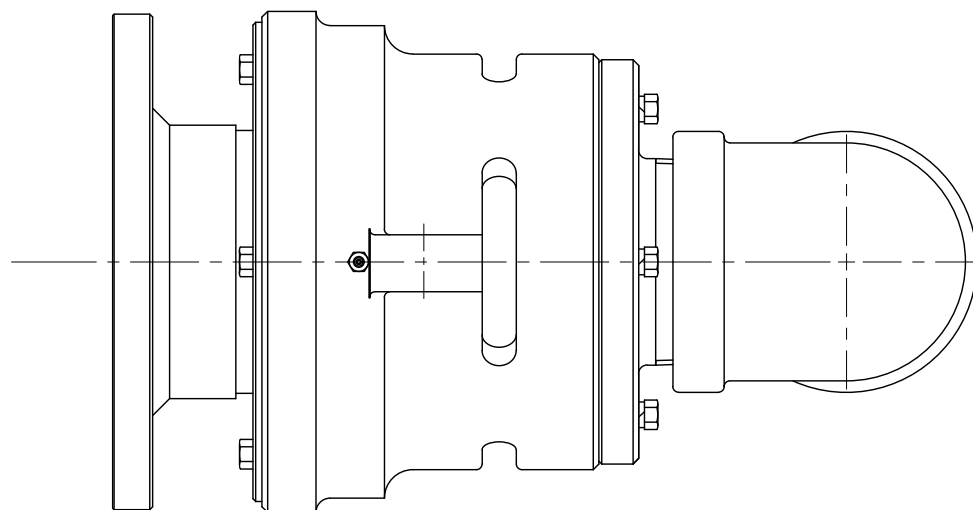

CONFIDENTIAL
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
 AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED
 OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PER-
 MISSION OF THE DEUBLIN COMPANY.

				EQUIPMENT REF:				SIZE 1/2	REV D	 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.
								REV LMD	DATE 09/24/02	
								REV		
								REV		
				ASSY/TEST FIXTURES REQUIRED:				UNTOLERANCED DIMENSIONS ±.010 DECIMALS AS SPECIFIED. DIMENSIONS IN () ARE IN MILLIMETERS.		TITLE: INTERFACE CONTROL DRAWING FOR UNION 6400-030-387 NO. 6400-030-387-IC CAD DRAWING
A	FLOW RATE WAS 300 GPM			EGR	12/03	RM				
LET.	REVISION			ECO	DATE	SIGN				