
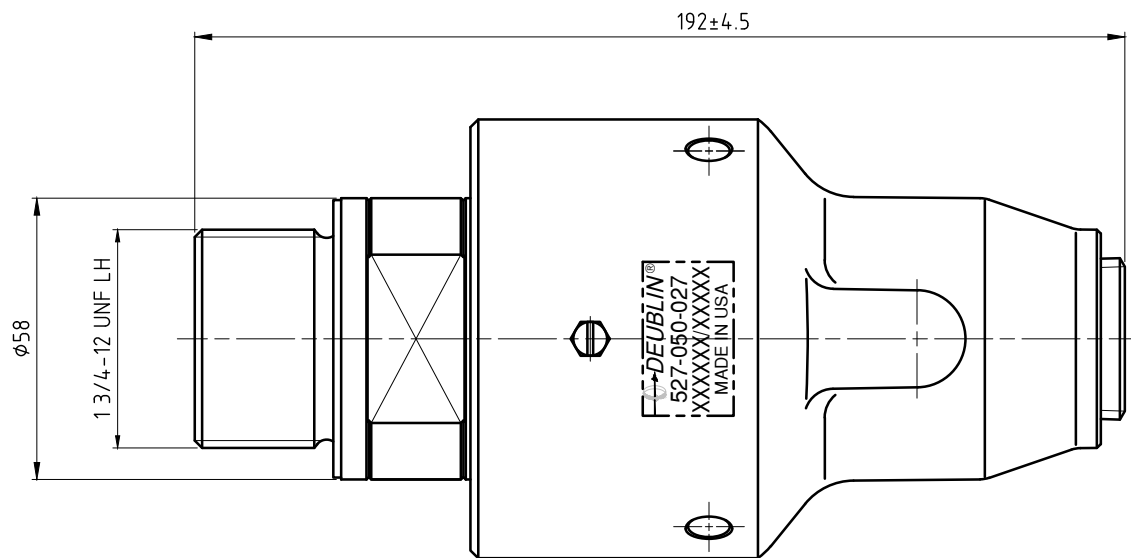
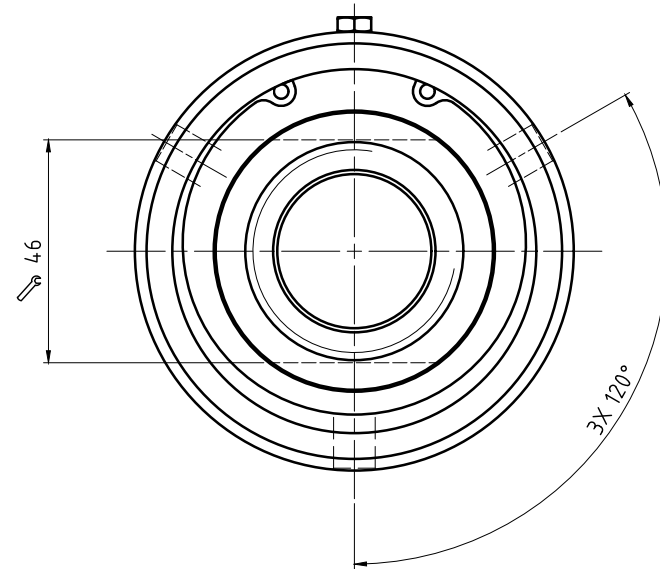
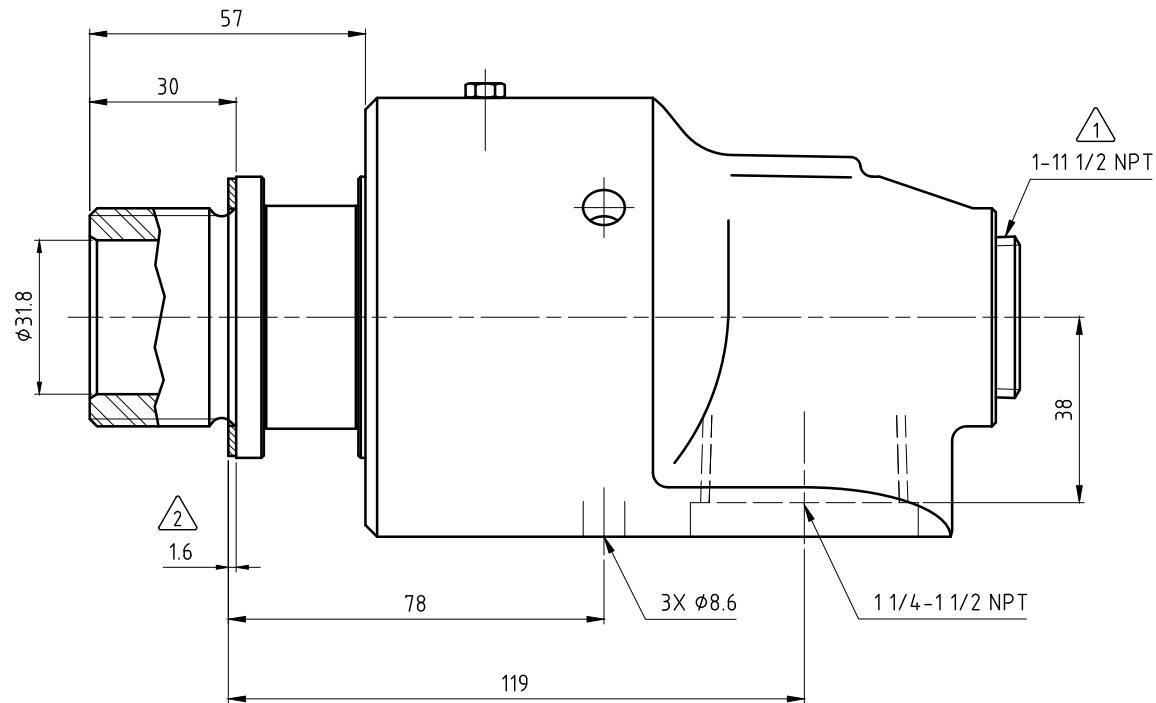


CONFIDENTIAL  
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY  
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,  
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT  
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR  
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

Ⓑ NOTES:

- ① - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,  
TIGHTEN BEFORE USE.
- ② - GASKET THICKNESS.

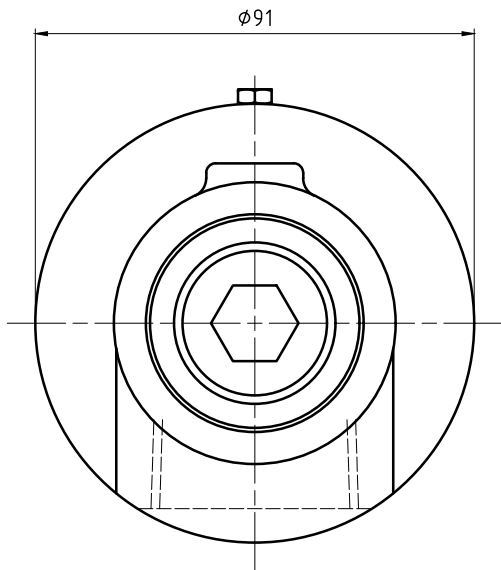

#### OPERATING DATA / Betriebsdaten

|                        |                              |            |
|------------------------|------------------------------|------------|
| media / Medium         | water / Wasser               |            |
| p max.                 | 150 PSI                      | 10 bar     |
| t max.                 | 200 °F                       | 90 °C      |
| n max.                 | 2500 RPM                     | 2500 1/min |
| filtration / Filterung | 60 µm                        |            |
| dry run / Trockenlauf  | not possible / nicht möglich |            |



SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN ROTATING UNION  
DEUBLIN Drehdurchführung

NO. 527-050-027

SHEET  
A3

|       |                    |        |       |      |
|-------|--------------------|--------|-------|------|
| B     | REVISED GEOMETRY   | 037299 | 04/16 | NR   |
| A     | WAS 527-050-027-00 | 031861 | 02/15 | RM   |
| ISSUE | MODIFICATION       | ECO    | DATE  | SIGN |

UNLESS SPECIFICALLY TOLERANCED, ALL  
DIMENSIONS ARE CONSIDERED REFERENCE