


① - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

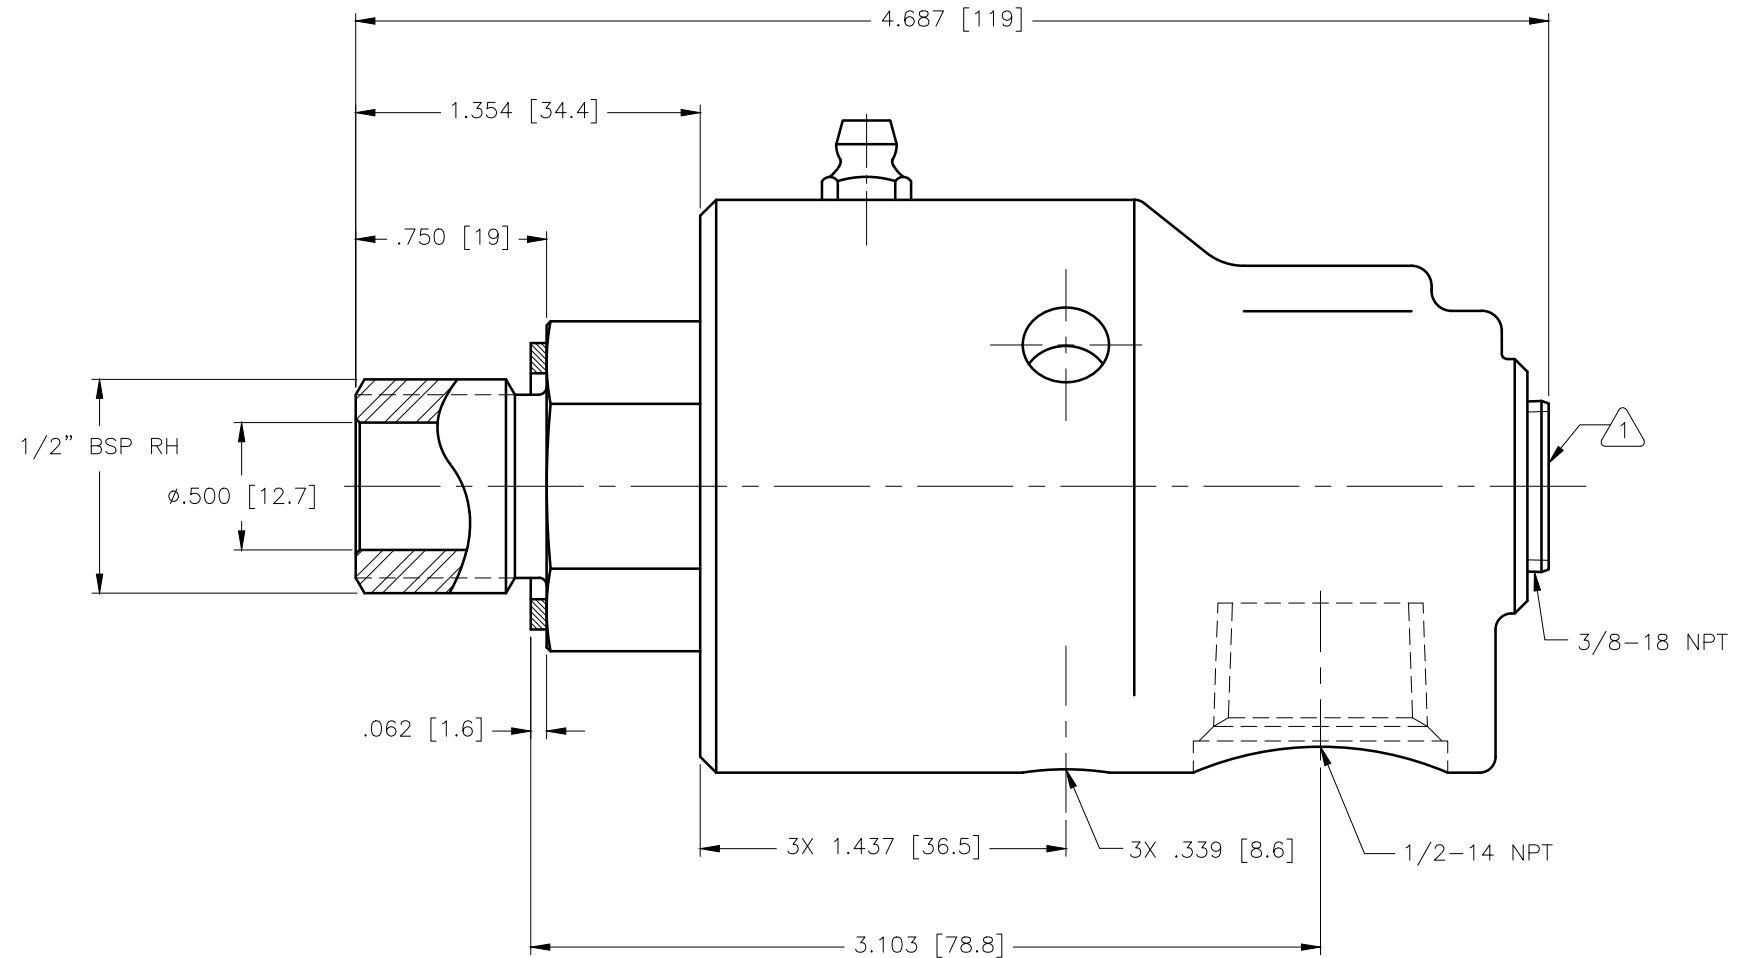

Ⓐ OPERATING DATA		
MEDIA	WATER, STEAM, OIL	
MAX WATER PRESSURE	750 PSI	50 bar
MAX INTERMITTANT SATURATED STEAM PRESSURE	15 PSI	1.0 bar
MAX OIL PRESSURE	100 PSI	6.6 bar
MAX WATER TEMP.	250°F	121°C
MAX OIL TEMP.	250°F	121°C
MAX SPEED	3500 RPM	3500/min

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



FILE:	INTERFACE CONTROL DRAWING FOR UNION 155-139-151
--------------	---

DWG. NO.	C.A.D DRAWING
155-139-151	

						SCALE	2:1	DWG SIZE	C
						DRN	RM	09/15/05	
						ENGR	ARS	09/15/05	
						APPD			
						PART NO.			
						155-139-151			
A	REVISED ROTOR HEX SIZE ADDED OPERATING DATA				028476	04/14	NR	CUSTOMER	
LET.	REVISION				ECO	DATE	SIGN		

UNLESS SPECIFICALLY
TOLERANCED, ALL
DIMENSIONS ARE
REFERENCE
DIMENSIONS IN []
ARE IN MILLIMETERS.