




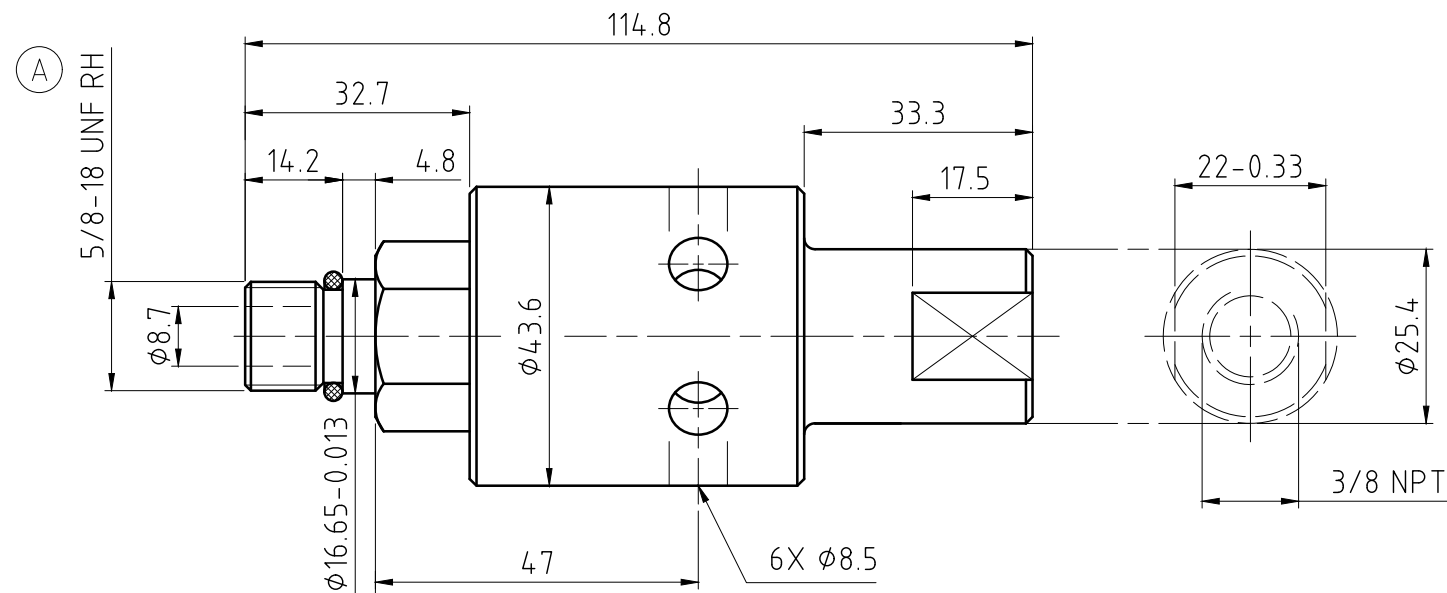


Spindelende des Kunden
CUSTOMER'S SPINDLE END

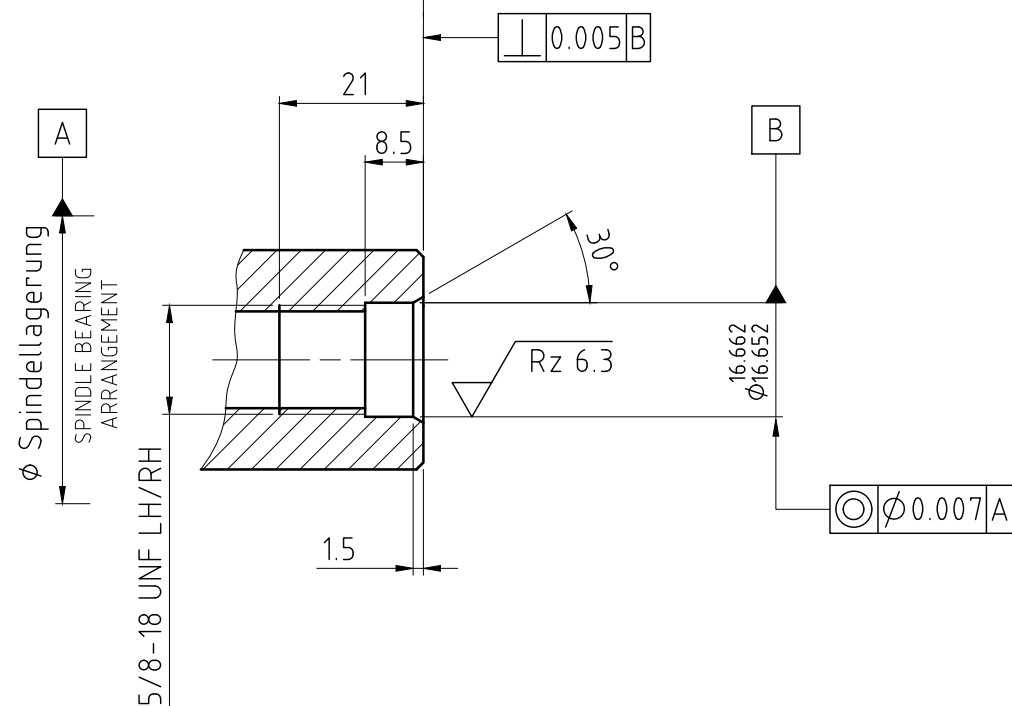

Max. Druck und max. Drehzahl gleichzeitig sind zu vermeiden. Zuordnung
siehe Diagramm.
OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
IF THE OPERATING CONDITIONS ARE CLOSE TO THESE LIMITS, LOOK ON THE DIAGRAM.

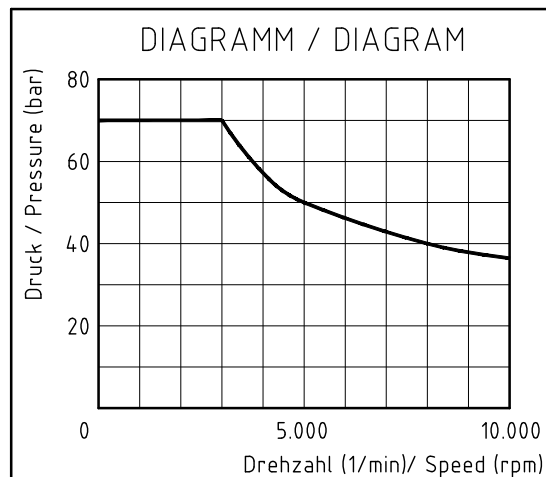

OPERATING DATA / Betriebsdaten		
MEDIA/Medium	COOLANT	KSS
p max.	1000 PSI	70 bar
n max.	10000 RPM	10000 1/min
t max.	160 °F	70 °C
Q max.	13.2 GPM	50 l/min
FILTRATION/Filterung	60 µm	60 µm



SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

DATE 03/14/08
NAME N. Reyna
ENGR. 03/14/08
S. Stasi
APPD.

TITLE: DEUBLIN UNION

NO. 1116-600-064

SHEET

A
ISSUE
MODIFICATION
ECO
DATE
019571
08/13
NR
SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE