


NOTES:
1 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1890-116.

1890-116-IC

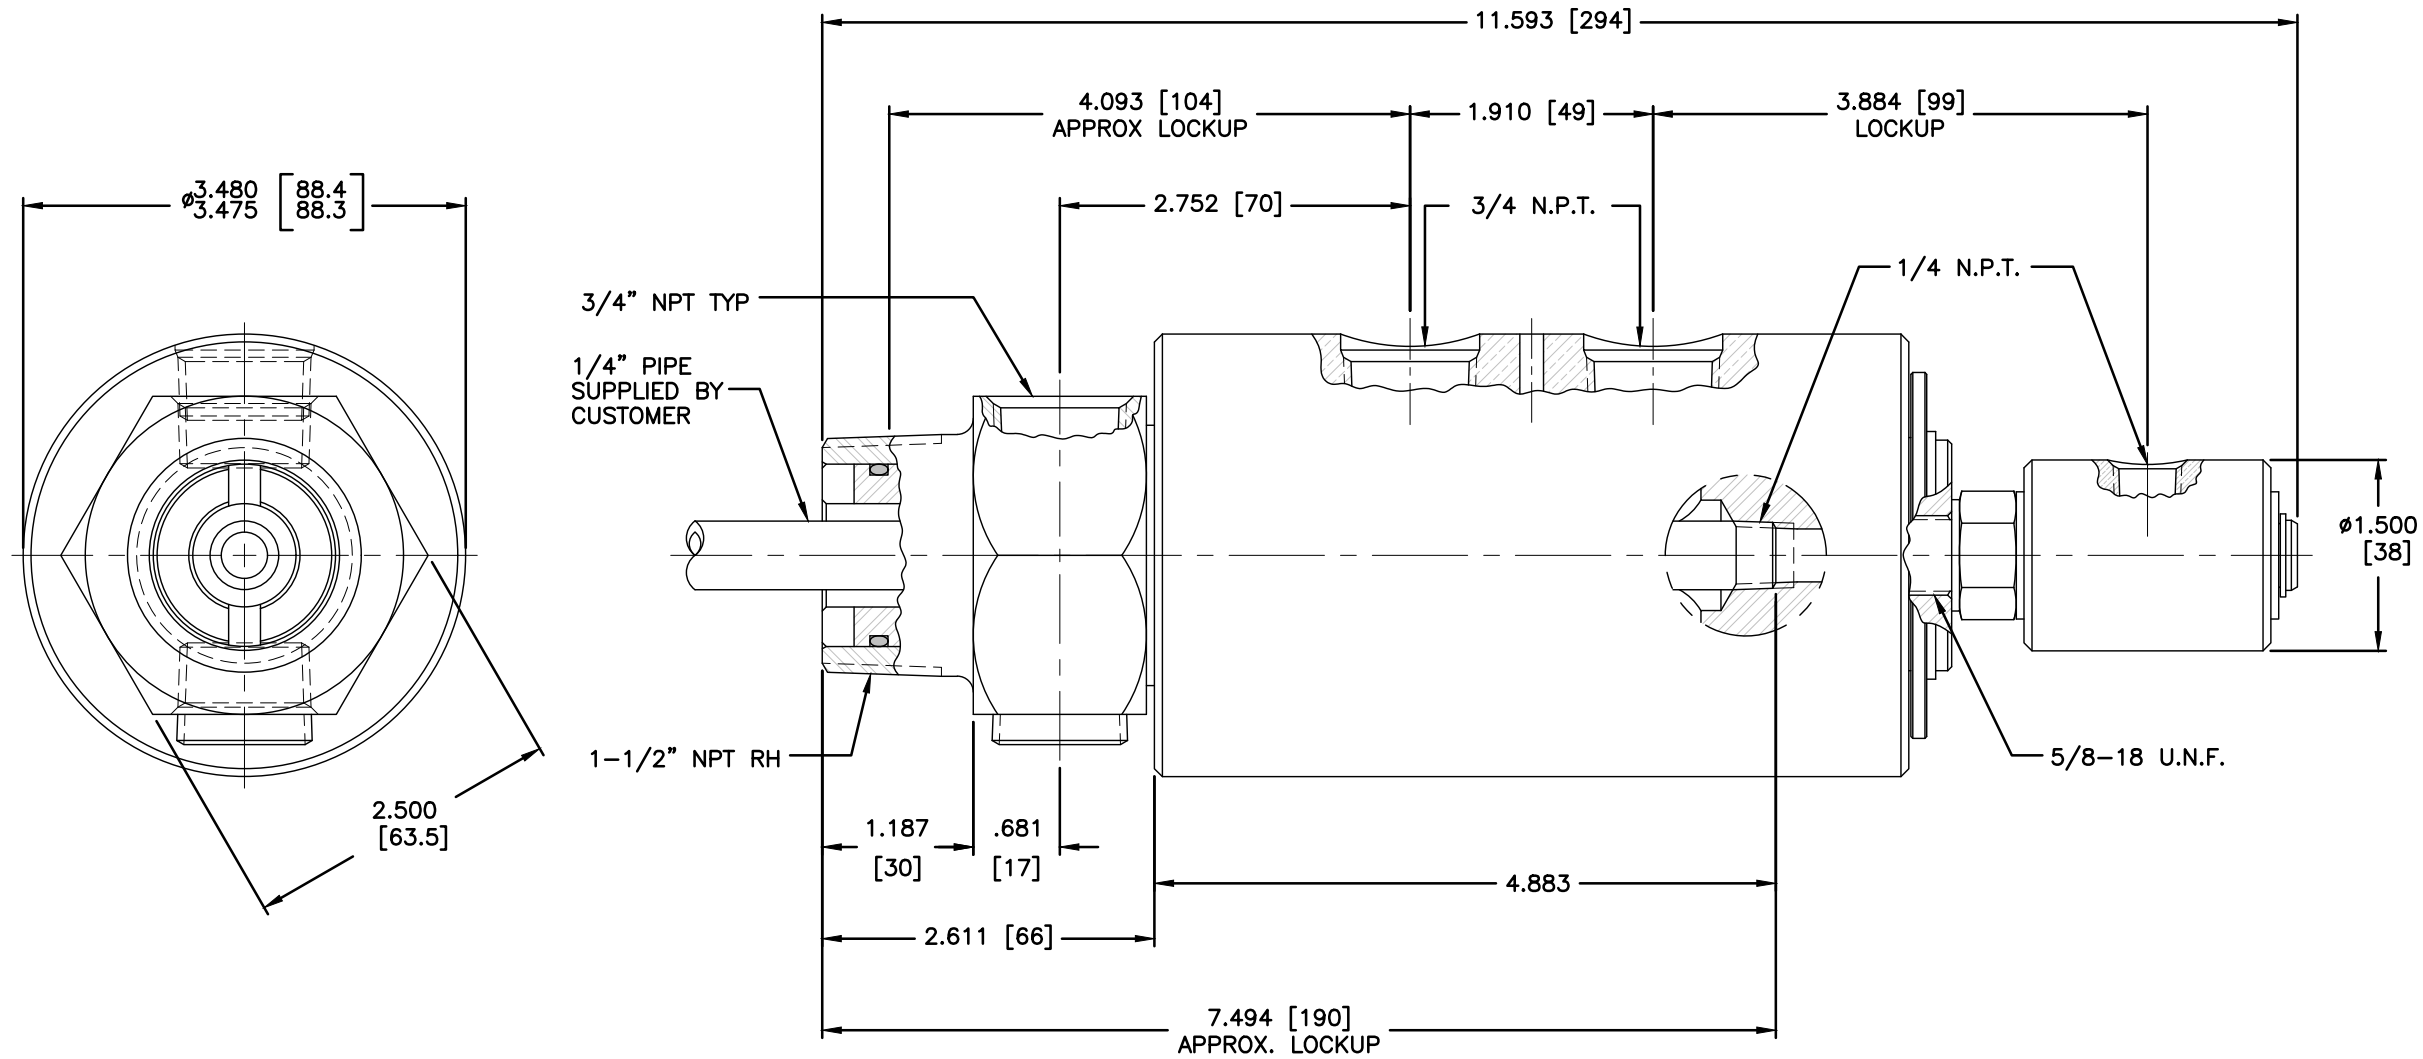

OPERATING DATA:

150 P.S.I. (10 BAR) MAX. AIR PRESSURE
28"Hg (6,7 kPa) MAX. VACUUM PRESSURE
3000 P.S.I. (204 BAR) MAX. HYDRAULIC PRESSURE
250°F (121°C) MAX. TEMPERATURE
250 R.P.M. (250/M) MAX. SPEED

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION OF DEUBLIN COMPANY.
COPYING, USE, TRANSMISSION, DISTRIBUTION, AND
DISCLOSURE ARE SUBJECT TO THE TERMS AND
CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.

LET.	REVISION	ECO	DATE	SIGN	

EQUIPMENT REF:

ASSY/TEST FIXTURES
REQUIRED:

SCALE	FULL	DWG SIZE	C
DRAWN	RM	06/20/03	
ENGR	ARS	06/20/03	
APPD	ARS	06/20/03	

UNLESS SPECIFICALLY
TOLERANCED, ALL
DIMENSIONS ARE
REFERENCE

DIMENSIONS IN []
ARE IN MILLIMETERS.

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL
DRAWING FOR DEUBLIN
UNION 1890-116

NO. 1890-116-IC

CAD DRAWING