

NOTES:

- 1- TORQUE BOLTS TO 20-30 FT-LBS (27-41 Nm) AND SAFETY WIRE.
2 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER 6400-084-533.

OPERATING DATA:

WATER SERVICE





150 P.S.I.(10 BAR) MAX.

750 R.P.M.(750/MIN) MAX.

250°F.(121°C) MAX.

TORQUE AT 150 P.S.I.=10 FT.LBS.

FLOW RATE = 300 GPM

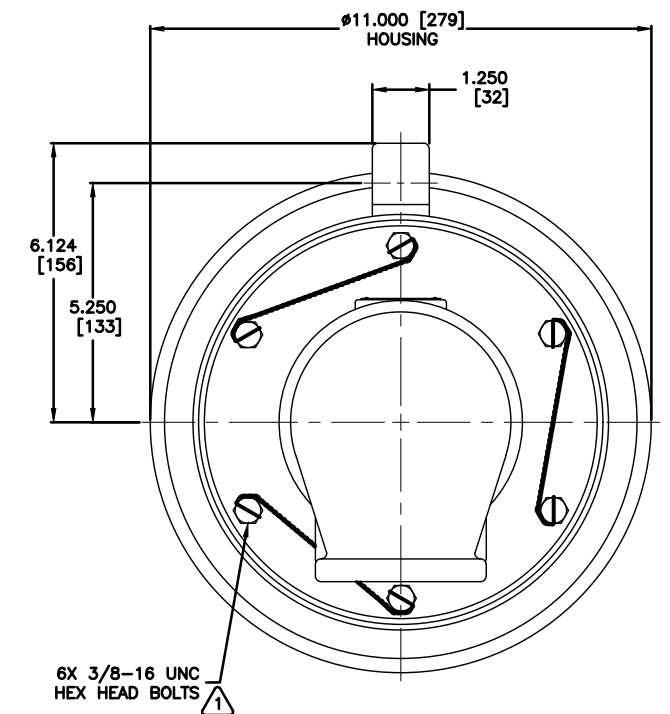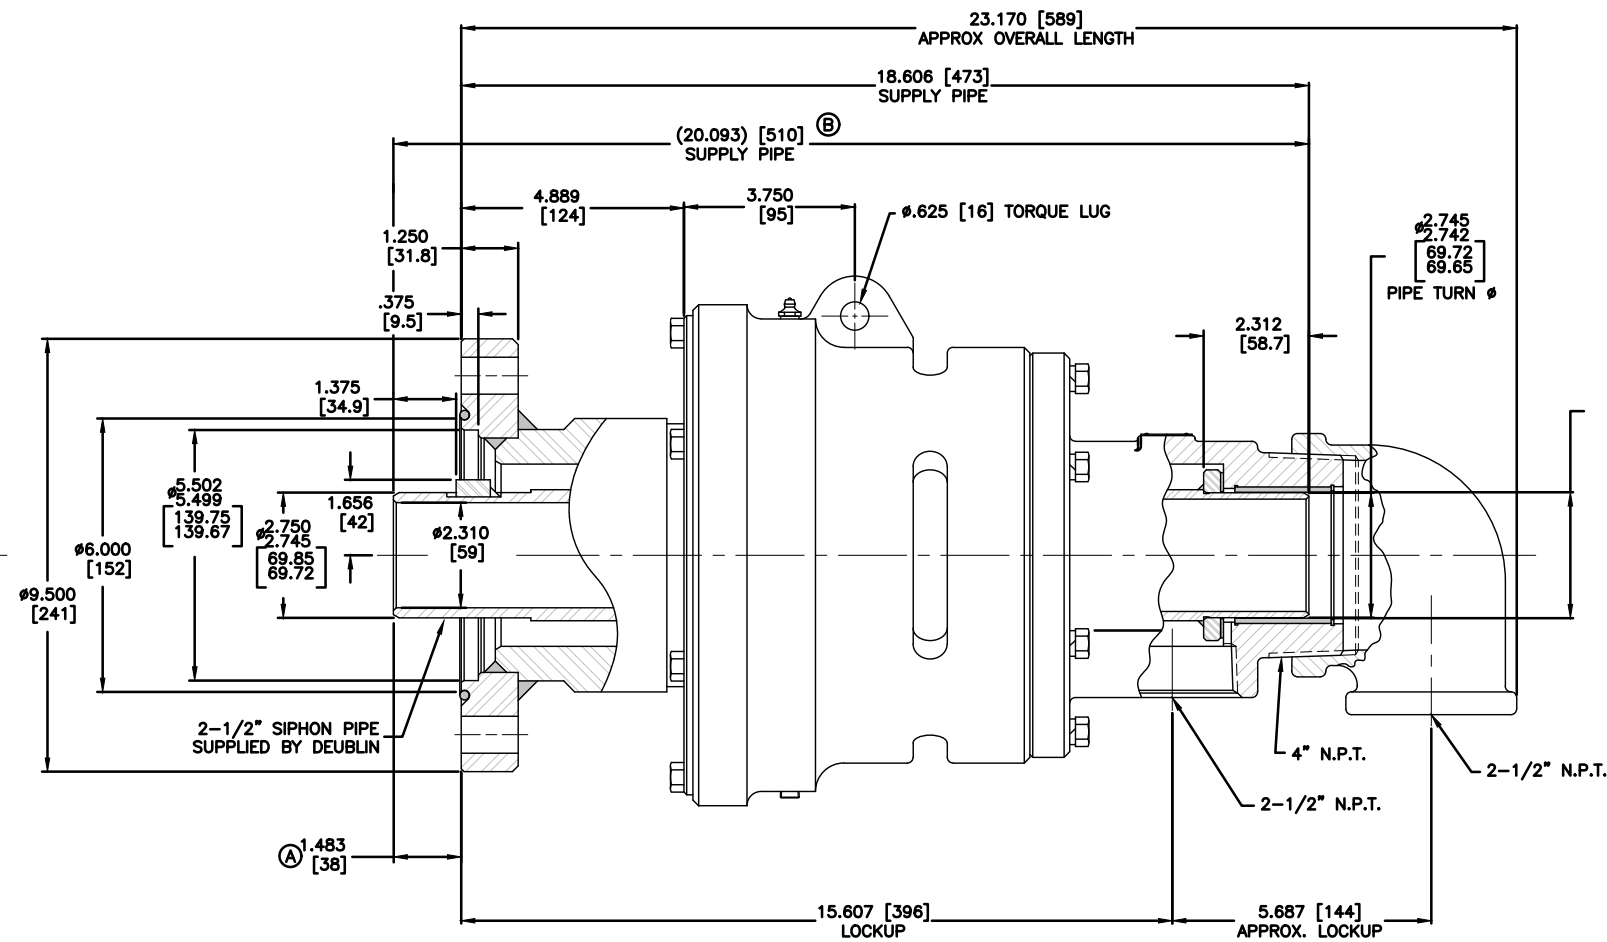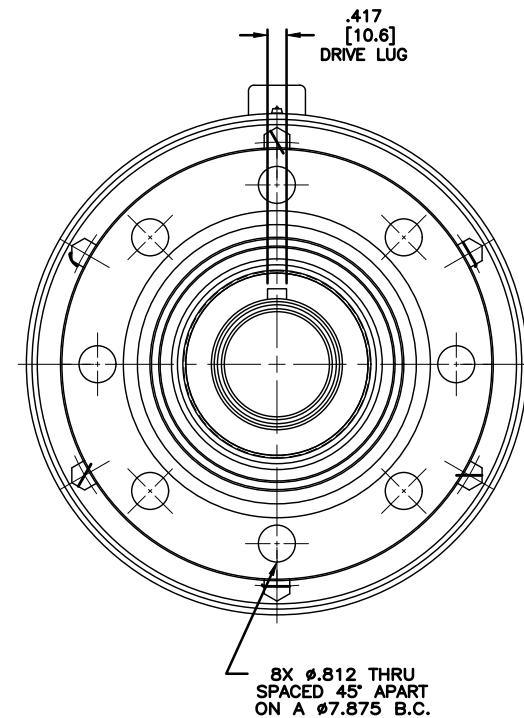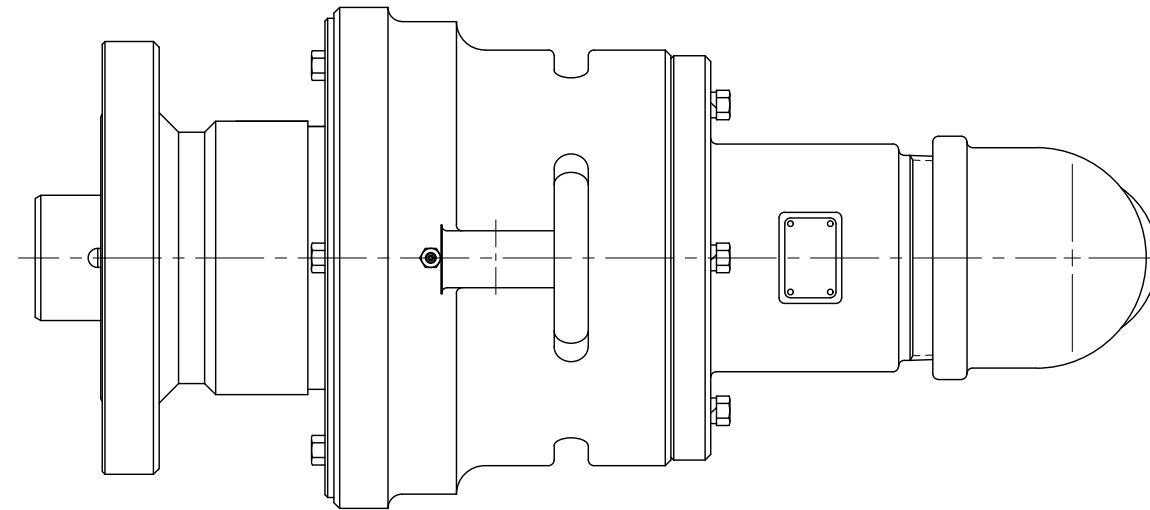

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

INTERFACE CONTROL
DRAWING FOR UNION
6400-084-533

DWG. NO. 6400-084-533-1C CAD DRAWING

						SOURCE	1:2	D
						BRI	LG	12/08/04
						ENR		
						JPPD		
						PART NO.		
B	ADDED DIMENSION		01/05	LG				
A	ADDED DIMENSION		12/04	LG		CUSTOMER		
LTC	REVISION	RCD	DATE	ISSN				

UNLESS SPECIFICALLY
TOLERANCED, ALL
DIMENSIONS ARE
REFERENCE
DIMENSIONS IN []
ARE IN MILLIMETERS.