
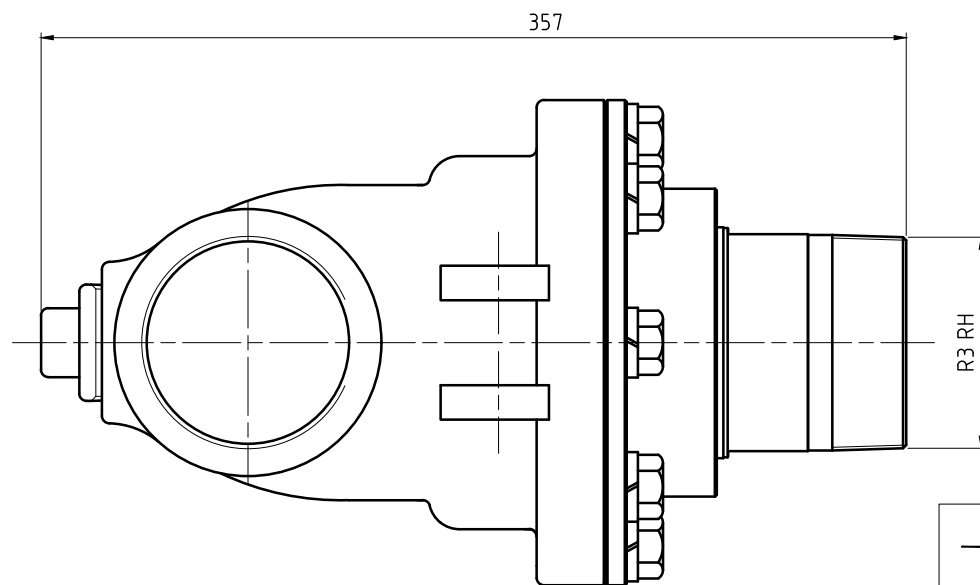
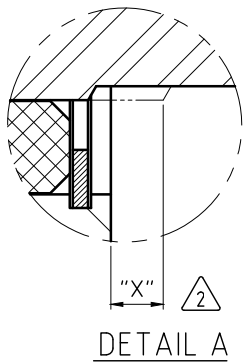
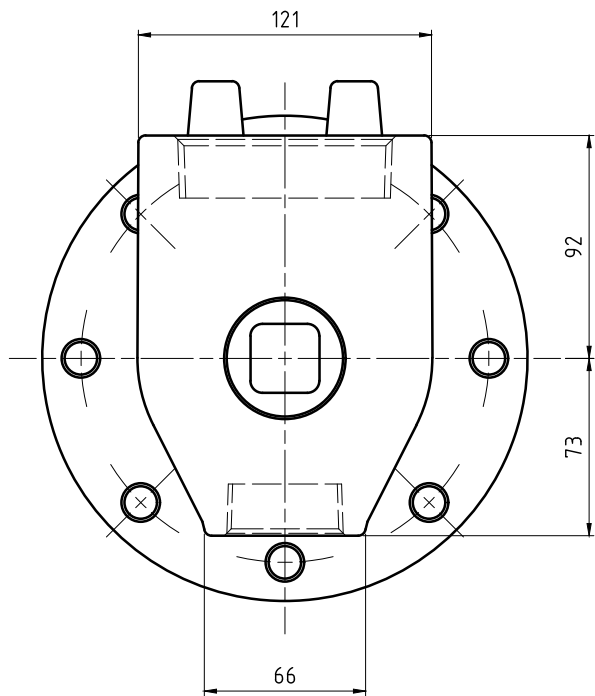
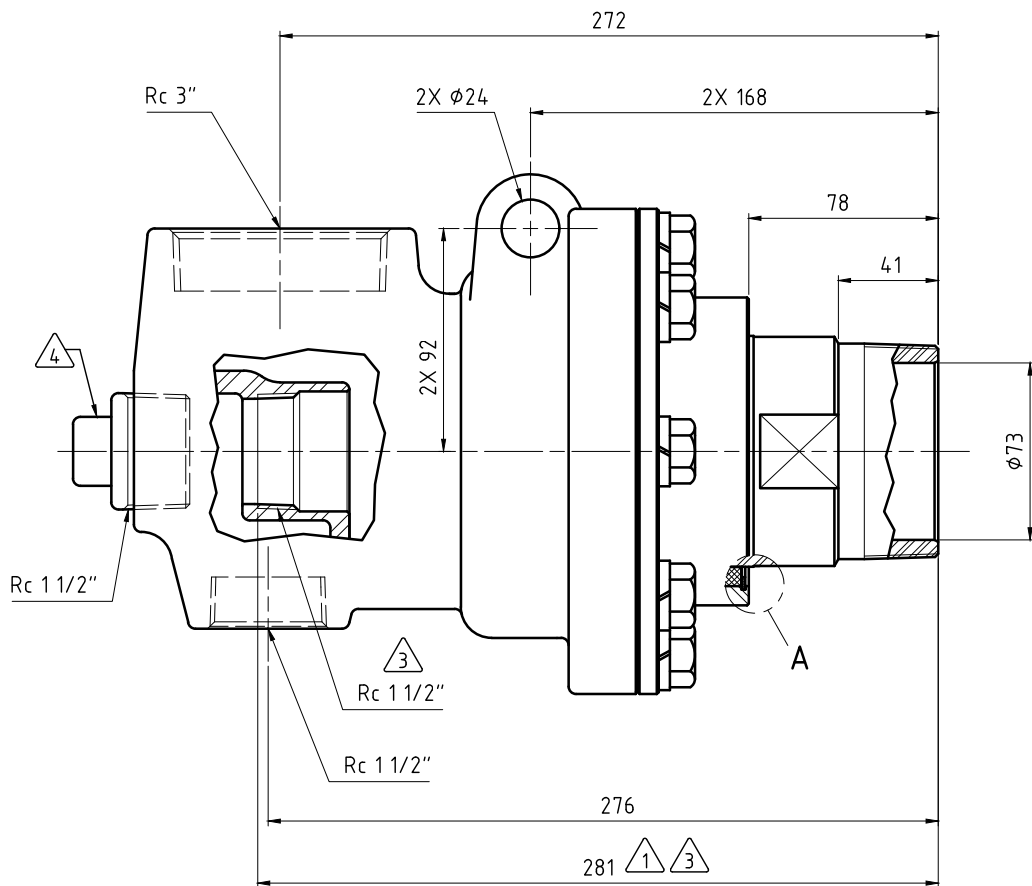


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

- 1 - PIPE LENGTH INTO UNION.
2 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN
FOR APPROPRIATE SERVICE KIT.
3 - PIPE SUPPLIED BY CUSTOMER.
4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

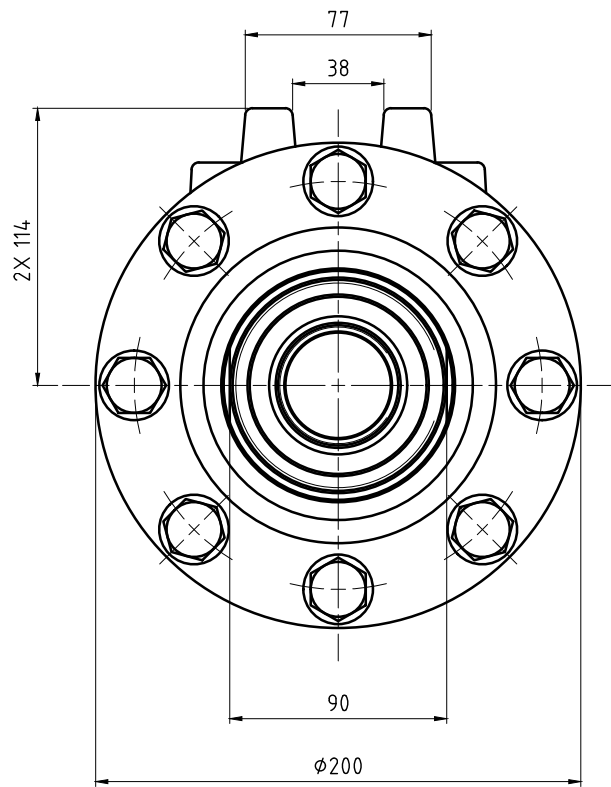

OPERATING DATA		
MEDIA	THERMAL OIL	
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	350 min ⁻¹
DRY RUN	NO	



SCALE: 1:2

MATERIAL: INTERFACE CONTROL DRAWING

DATE: 10/27/17
NAME: N. Reyna
ENGR: 10/27/17
L. Freed
APPD.

TITLE: DEUBLIN UNION

NO. BC-54000-48-20B

SHEET
A2

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE MODIFICATION ECO DATE SIGN