

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

Ø88	q5	-0.012	87 988
Ø88	H6	-0.027	87 973
Dimen.	Fit	0	88 022

NOTE:

1 - USE INSTRUCTION MANUAL 40-565.



2 - SEE OPERATING DATA CHART FOR P1 AND P2 PASSAGE MEDIA.

3 - P2 PASSAGES TO BE WITHIN AREA INDICATED AND SHOULD BE SYMMETRICAL. 2X Ø4 RECOMMENDED.



4 - SPECIFIED SURFACE FINISH APPLIES TO AREA WITHIN INDICATED DIAMETER ONLY.

5 - AIR SEAL OILER (2X)

(A)

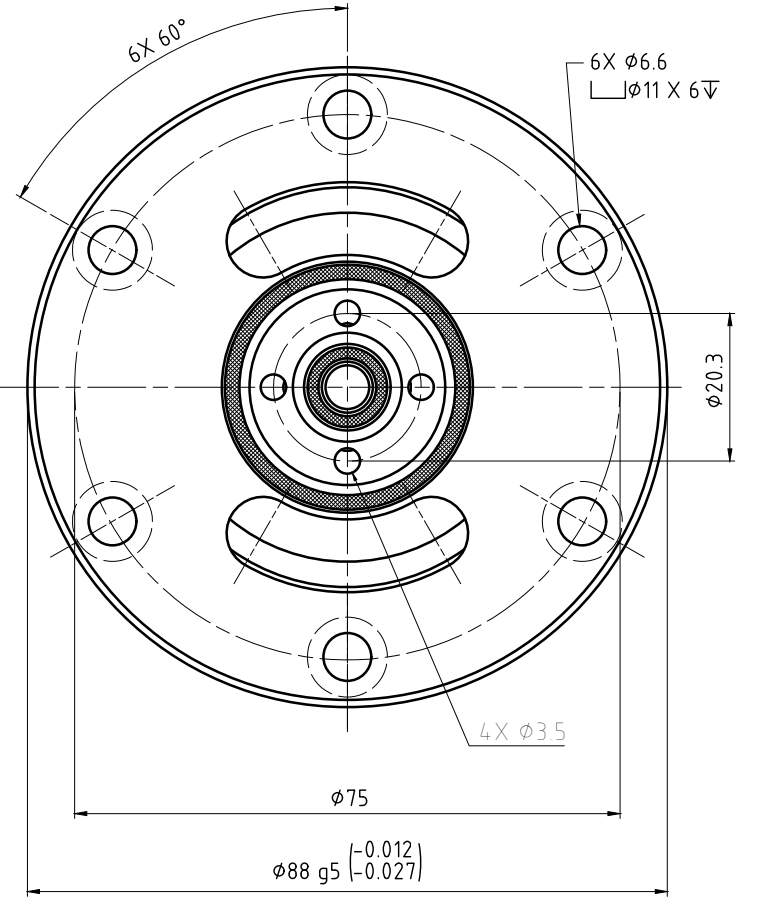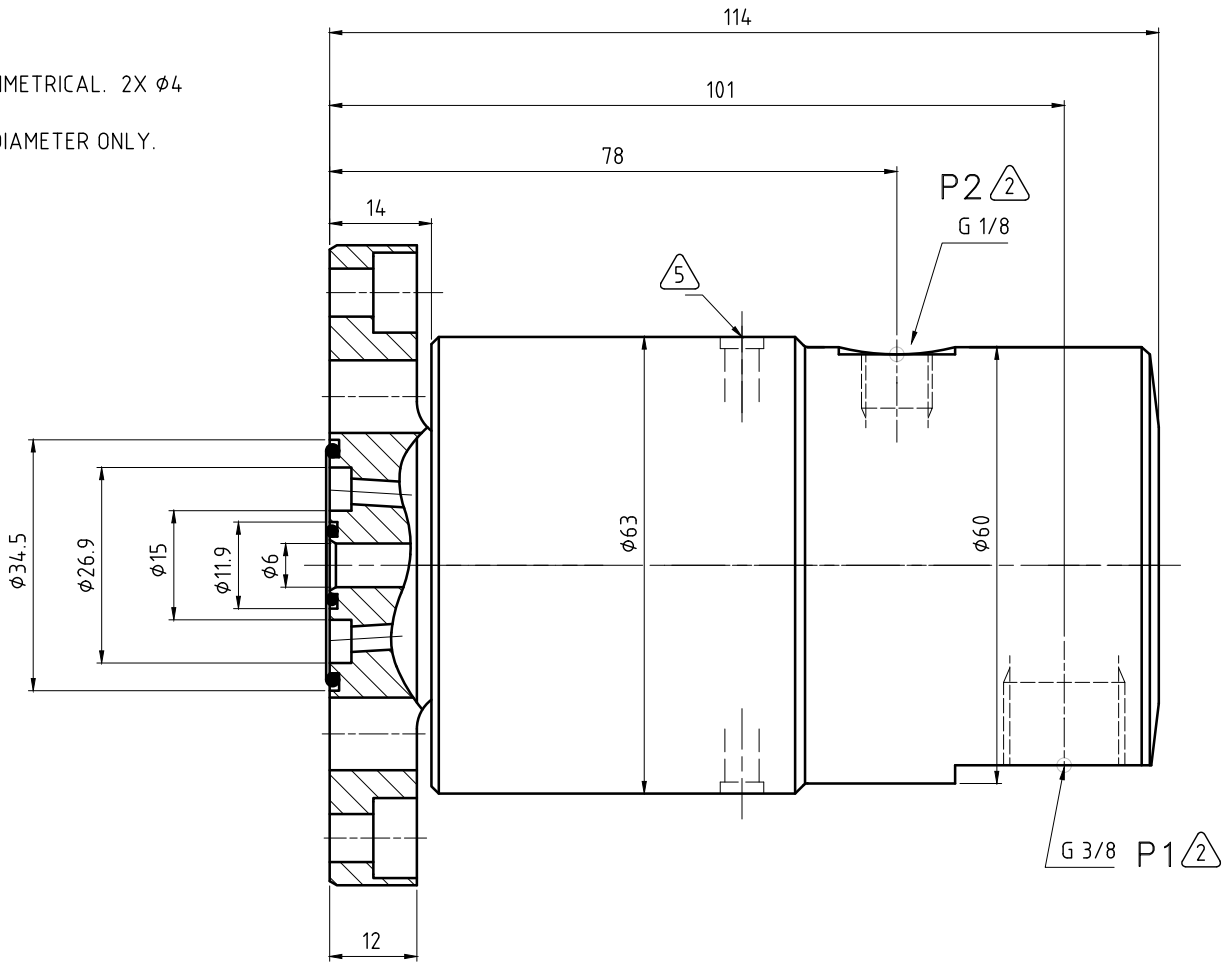

CUSTOMER INTERFACE

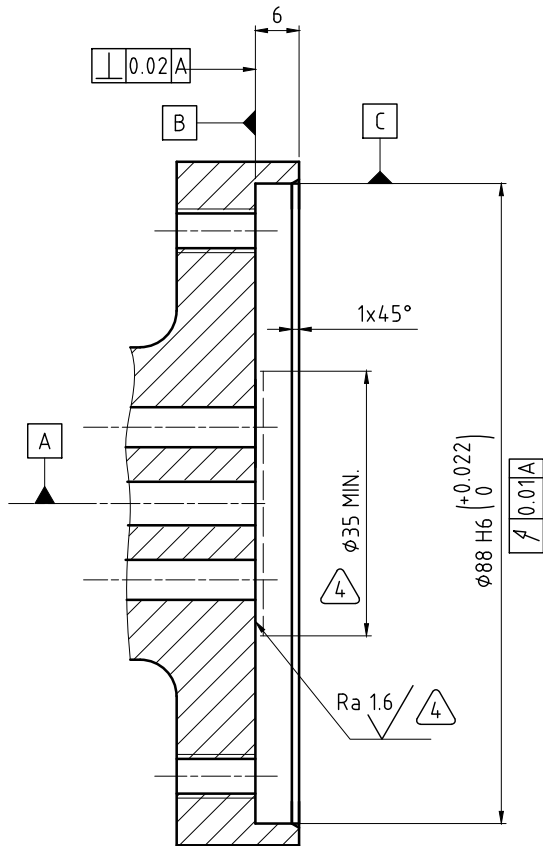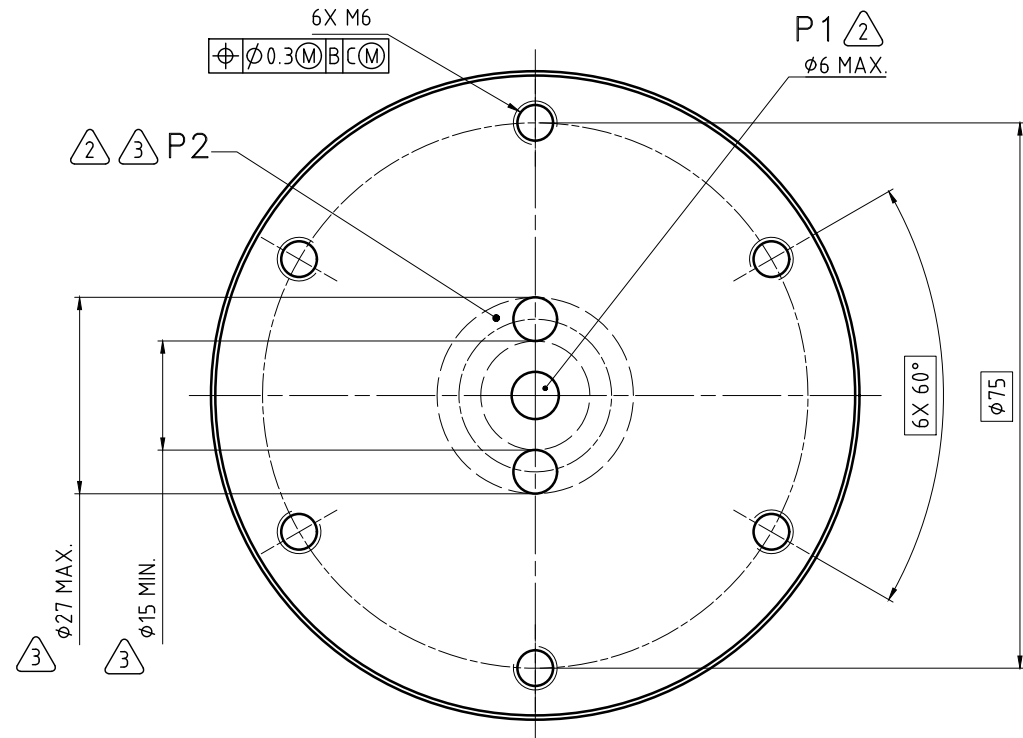

OPERATING DATA

PASSAGE		P1 - INNER	P2 - OUTER
MEDIA		HYDRAULIC OIL	AIR
PRESSURE	MAXIMUM	70 bar	10 bar
	MINIMUM	-	-
FLOW RATE	MAXIMUM	69 l/min	35 NI/sec
	MINIMUM	-	-
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		7000/min	
DRY RUN		NO	



DEUBLIN GmbH
D-65719 HOFHEIM-WALLAU, GERMANY



SCALE: 1:1

INTERFACE CONTROL DRAWING

DATE	NAME
DRN. 22.11.2007	Schmid
ENGR. 22.11.2007	CW
APPD.	

TITLE: DEUBLIN UNION 2-PASSAGE
HYDRAULIC OIL INNER / AIR OUTER

ISSUE	MODIFICATION	ECO	DATE	CW	SIGN
A	NOTE 6 REMOVED	025492	10/13	CW	

PART NO. 2620-122-940

SHEET A2