
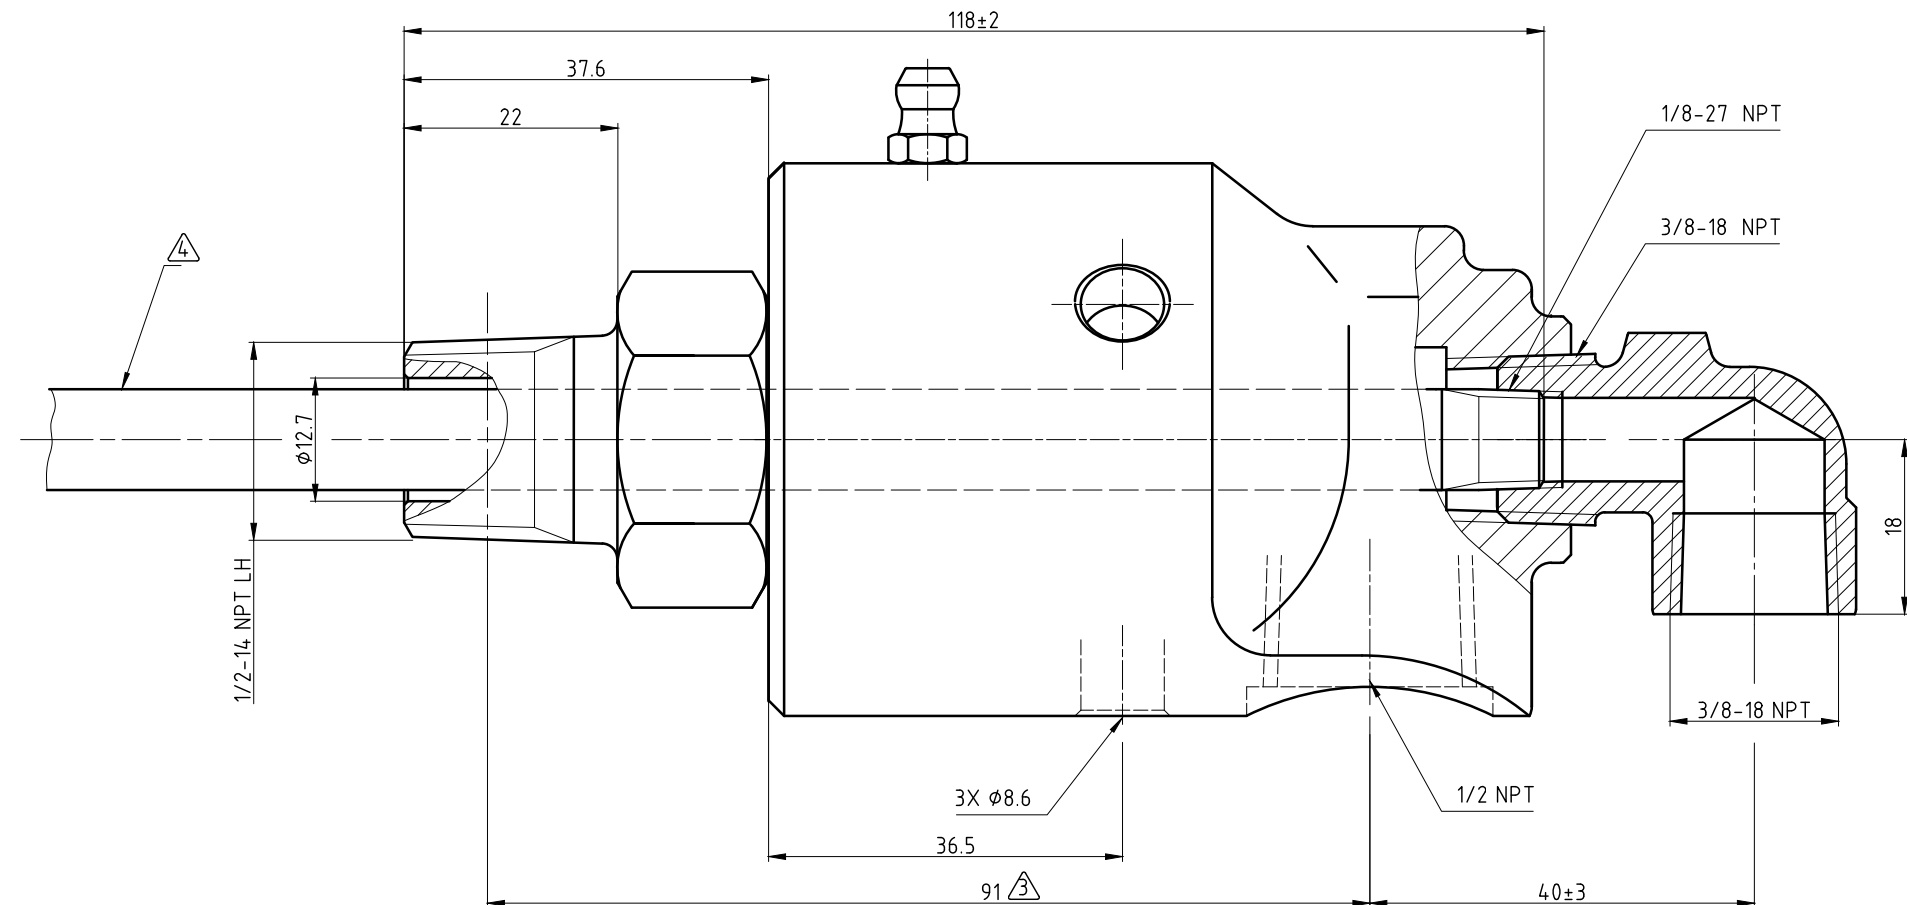



NOTES:

- 1 - USE INSTRUCTION MANUAL 040-550
2 - VENT HOLE (POSITION 5-7 O'CLOCK)
3 - LOCKUP
4 - 1/8" SIPHON PIPE SUPPLIED BY CUSTOMER

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

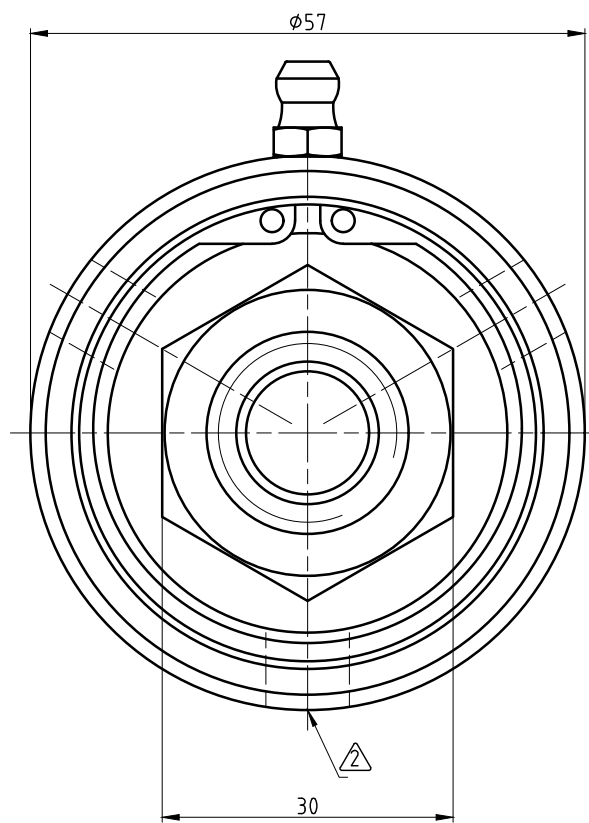

OPERATING DATA			
MEDIA	★ WATER	SATURATED STEAM (INTERMITTENT)	HOT OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	1500 min ⁻¹	1500 min ⁻¹	1500 min ⁻¹
TEMPERATURE MAX.	120 °C	120 °C	120 °C
DRY RUN (WITHOUT ANY MEDIA)	NO		
ADDITIONAL INFORMATION	★ PRESSURES EXCEEDING 8 bars ONLY PERMISSIBLE WITH COLD WATER (50°C MAX.)		



PROJECTION: SCALE: 2:1
MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME
26.02.2010	HS
01.03.2010	FD
APPD.	
ISSUE	MODIFICATION
ECO	DATE
SIGN	

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung
NO. 155-000-002012
SHEET A2

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE