

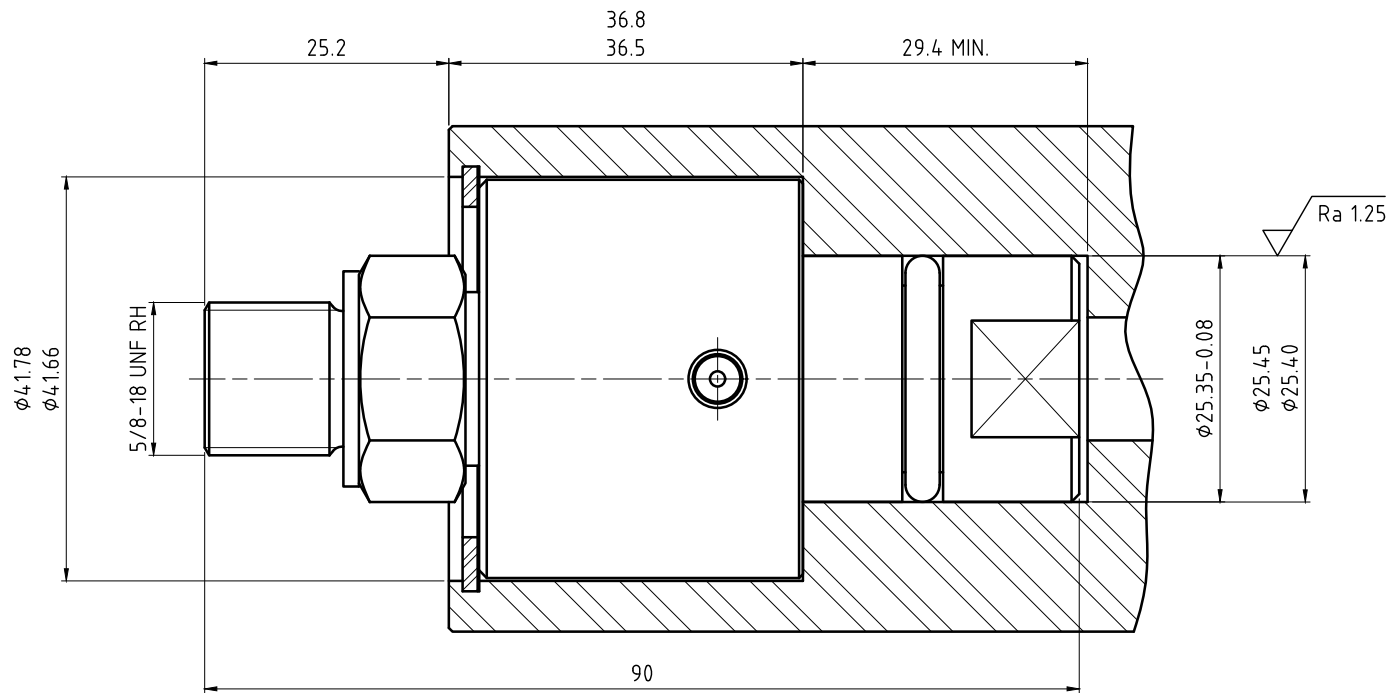
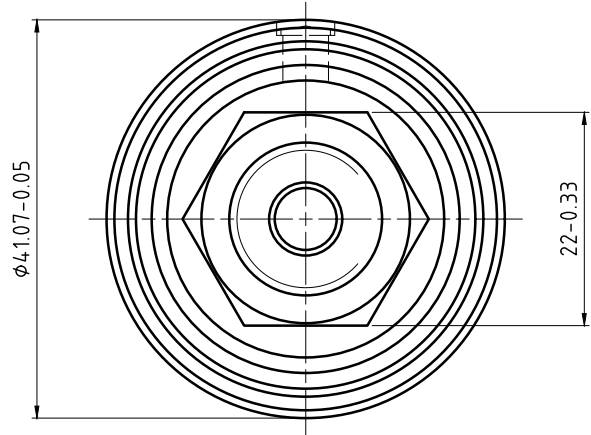


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

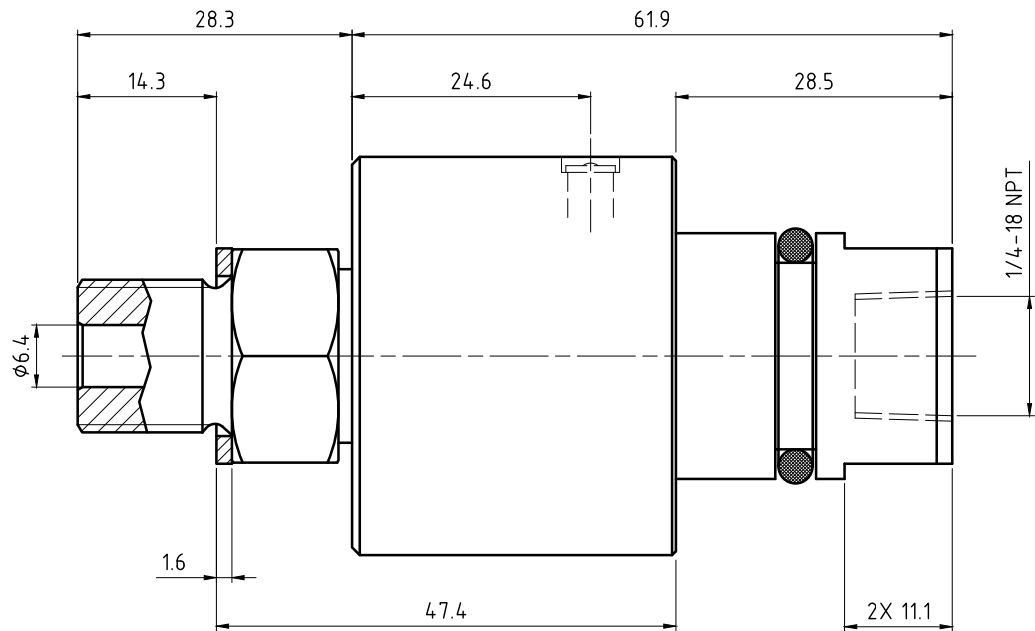

CUSTOMER SHAFT DIMENSIONS

OPERATING DATA			
MEDIA	AIR	VACUUM	HYDRAULIC OIL
PRESSURE MAX.	10 bar	7 kPa	70 bar
SPEED MAX.	3500 min ⁻¹	3500 min ⁻¹	3500 min ⁻¹
TEMPERATURE MAX.	120 °C	120 °C	120 °C
FLOW RATE MAX.	1133 NL/min	- NL/min	15 L/min
DRY RUN	--	--	NO

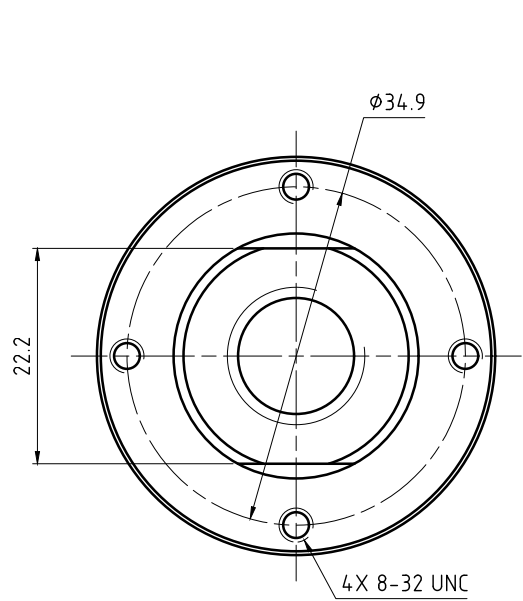

SCALE: 2:1
MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME	TITLE
DRN. 10/13/14	N. Reyna	DEUBLIN ROTATING UNION
ENGR. 10/13/14	T. Wilson	
APPD.		
ISSUE	MODIFICATION	ECO
DATE	SIGN	

NO. 1102-025-029-IC

SHEET
A2