DWG. NO.
1116–436–143–IC

NOTES:
1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1116–436–143.
2 – OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
IF OPERATING CONDITIONS ARE MARGINAL, PLEASE CONSULT DEUBLIN ENGINEERING.
3 – RECOMMENDED FILTRATION IS 25 MICRONS.
4 – DO NOT RUN DRY.

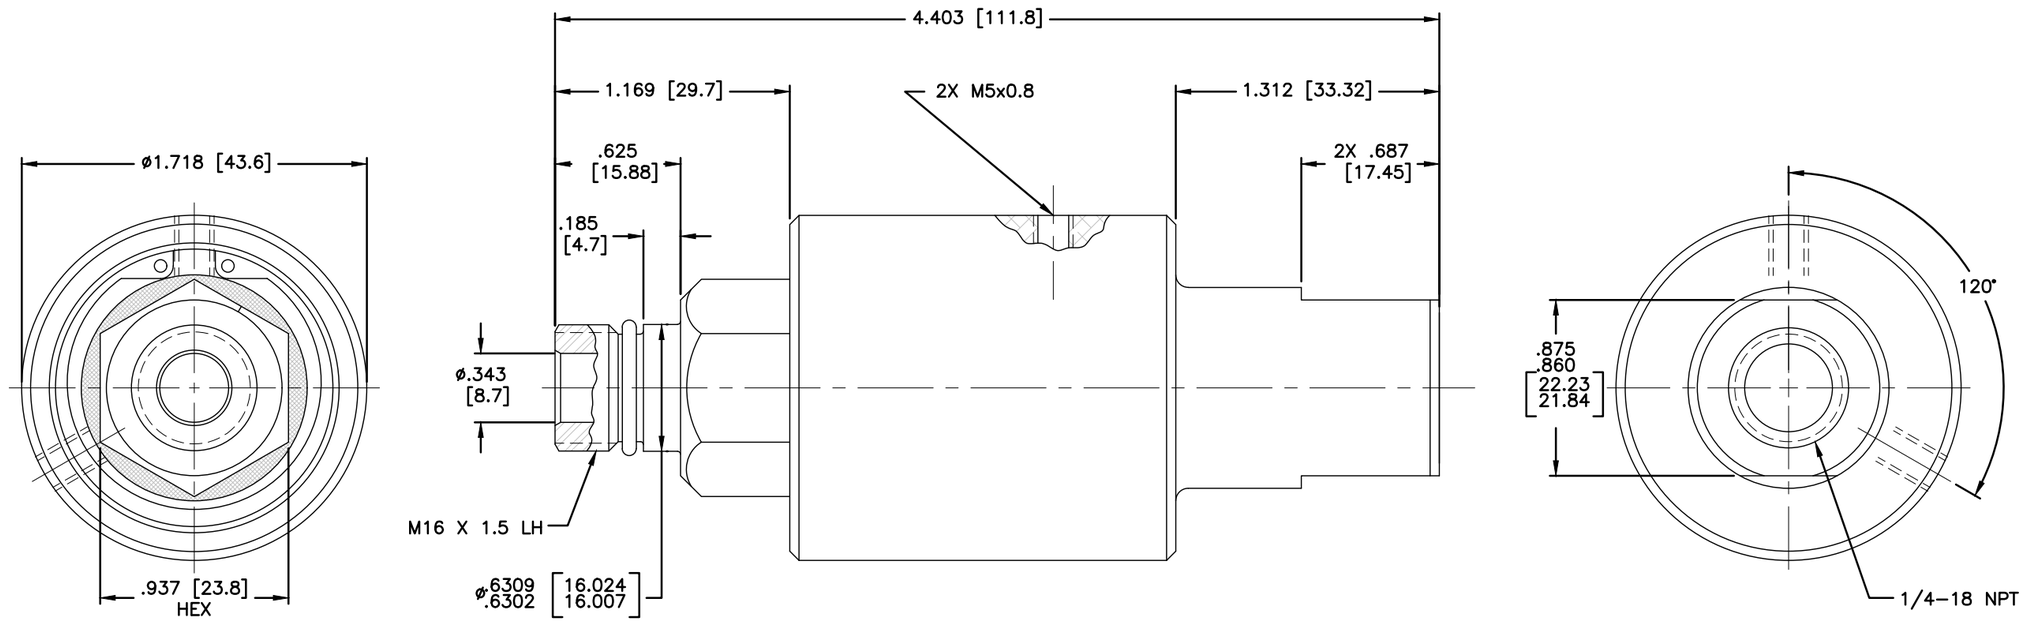

OPERATING DATA		
MEDIA	COOLANT	
MAX COOLANT PRESSURE	1000 PSI	70 bar
MAX SPEED	10,000 RPM	10,000/min
MAX FLOW RATE	13.8 GPM	50 L/min
MAX TEMPERATURE	250°F	121°C

LET.	REVISION	ECO	DATE	SIGN

SCALE 2:1 | DWG SIZE C
DRN RM 03/06/06
ENGR ARS 03/06/06
APPD ARS 03/06/06
PART NO. 1116–436–143
CUSTOMER

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE

DIMENSIONS IN [ ] ARE IN MILLIMETERS.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL DRAWING FOR DEUBLIN UNION 1116–436–143

DWG. NO. 1116–436–143–IC C.A.D DRAWING