
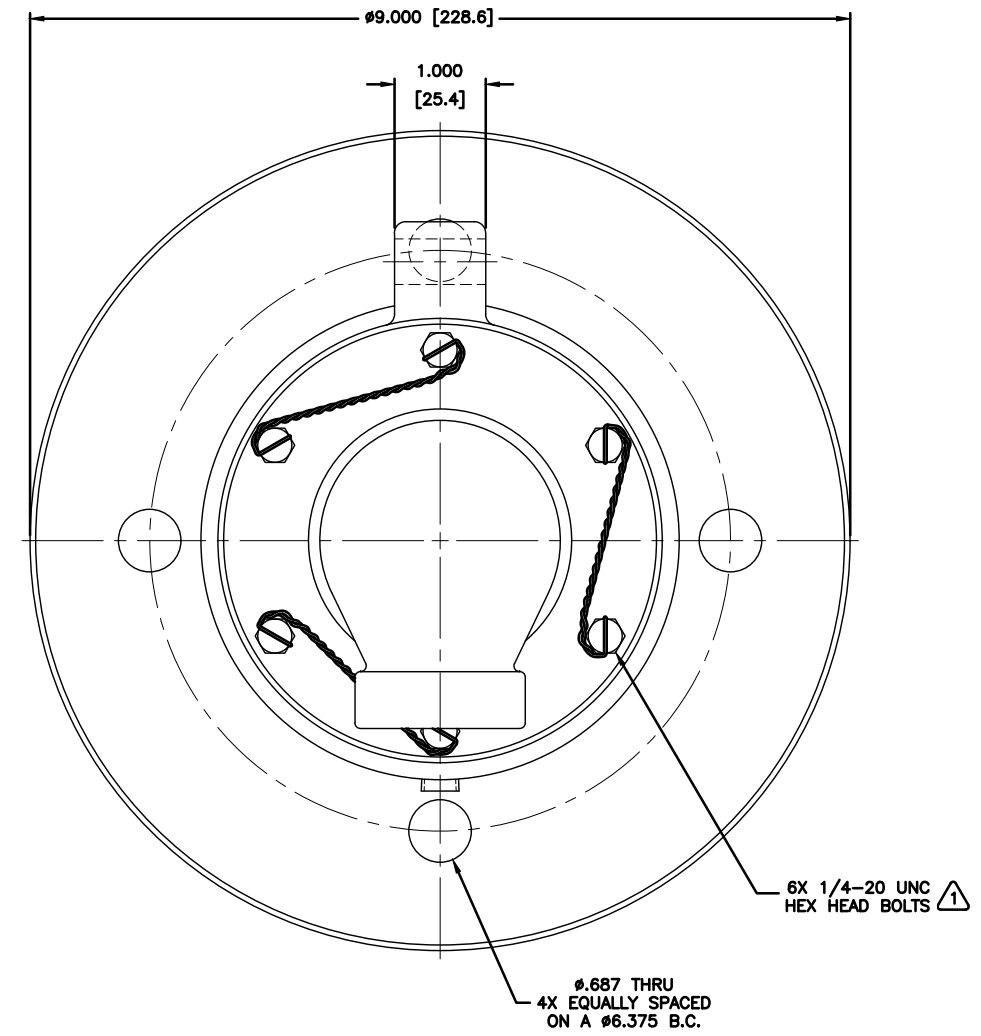


NOTES:
⚠ - TORQUE BOLTS TO 7-9 FT-LBS (9.5-12 Nm) AND SAFETY WIRE.
2 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER 6200-011-115.

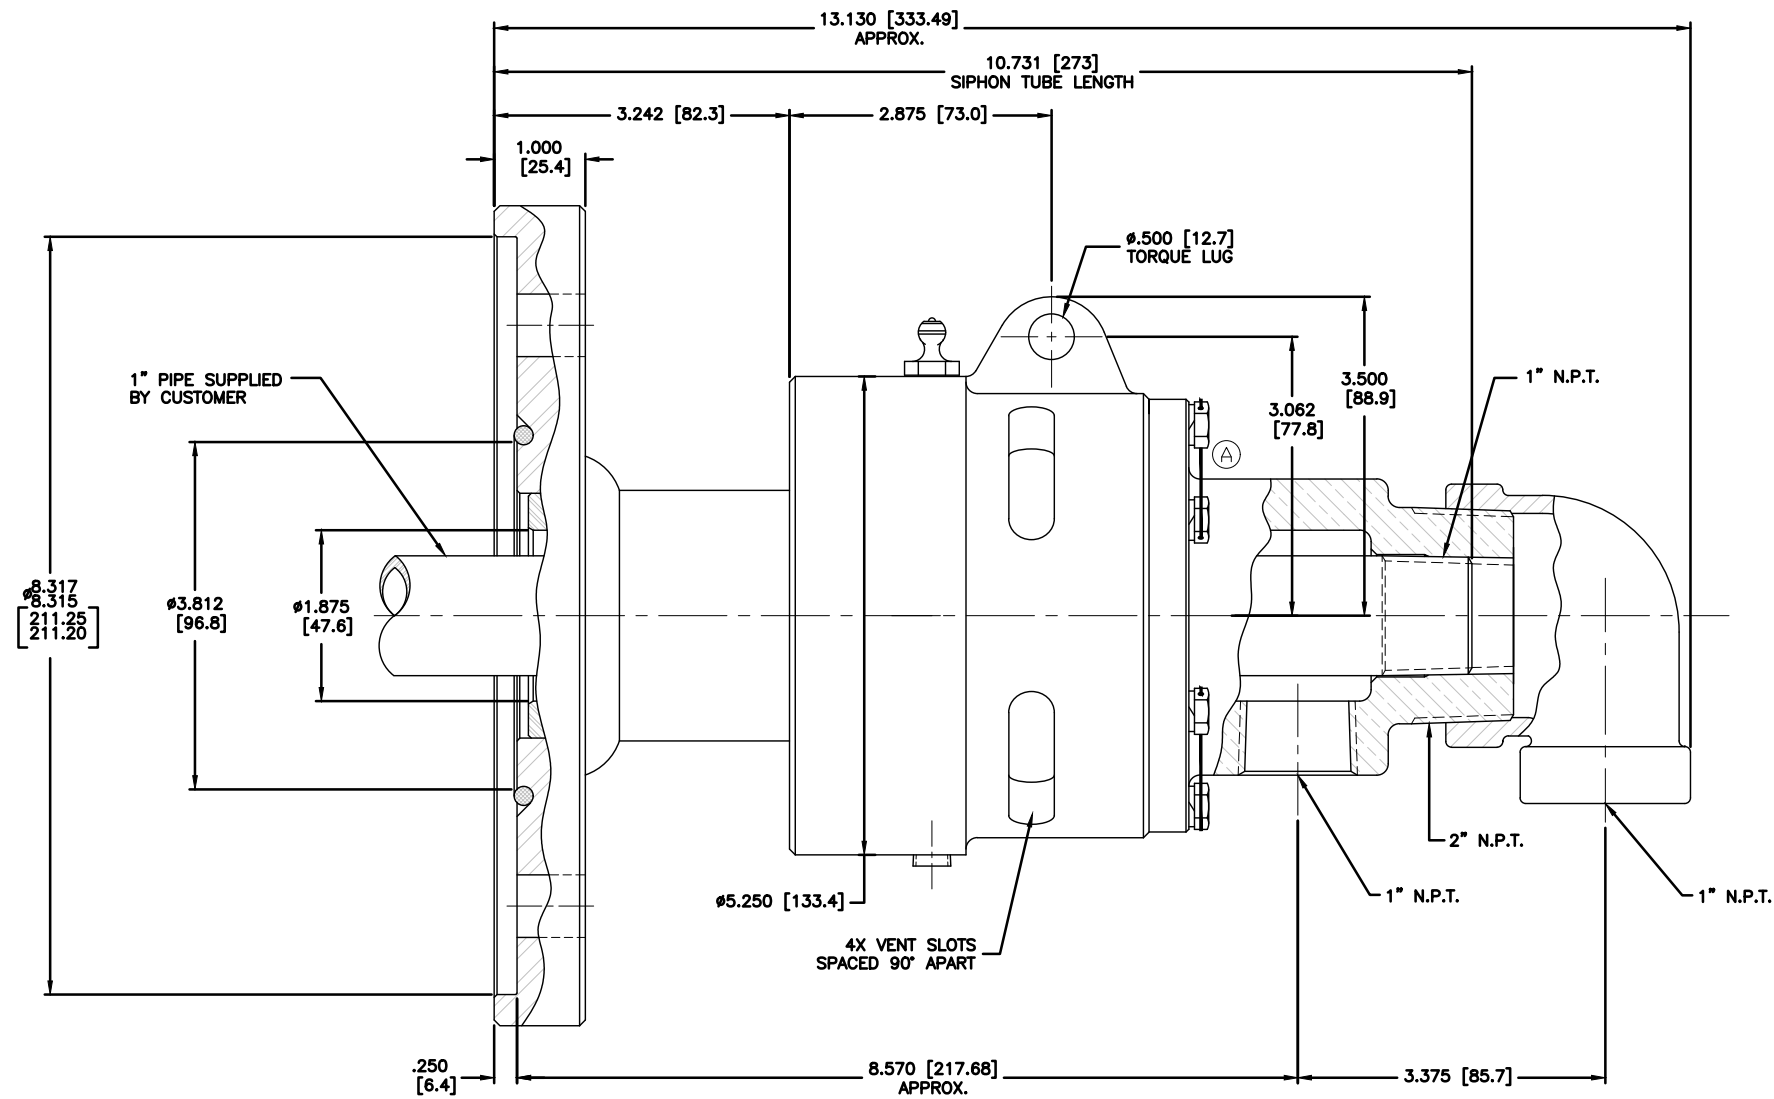

OPERATING DATA			
MEDIA: WATER			
MAX TEMPERATURE	250°F (121°C)		
MAX PRESSURE	150 PSI (10 BAR)		
MAX R.P.M.	750 (750 /MIN)		
MAX FLOW	55 GPM (208 L/MIN)		

CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF THE DEUBLIN COMPANY.

EQUIPMENT REF:		DATE	FULL	REV	D
		04/20/04	RM		
		04/20/04	TW		
		04/20/04	MS		
ASSY/TEST FIXTURES REQUIRED:					
A ADDED LOCKING WIRE		020914	1212	HS	
LET.	REVISION	ECO	DATE	SIGN	

UNTOLERANCED DIMENSIONS ±.010 DECIMALS AS SPECIFIED. DIMENSIONS IN [] ARE IN MILLIMETERS.

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

INTERFACE CONTROL
DRAWING FOR DEUBLIN
UNION 6200-011-115

6200-011-115-IC