


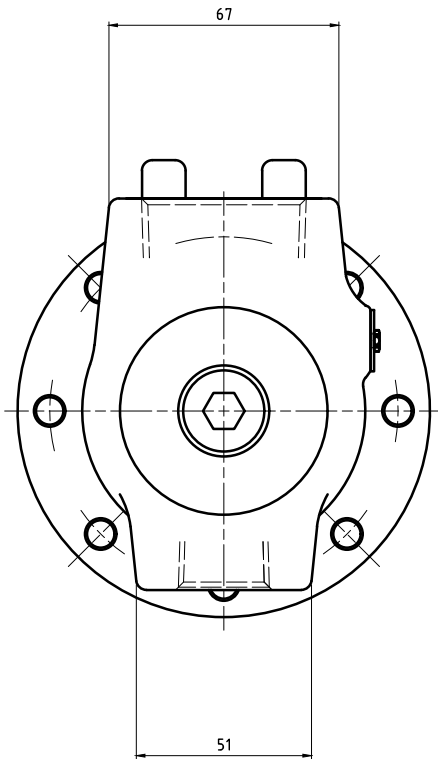
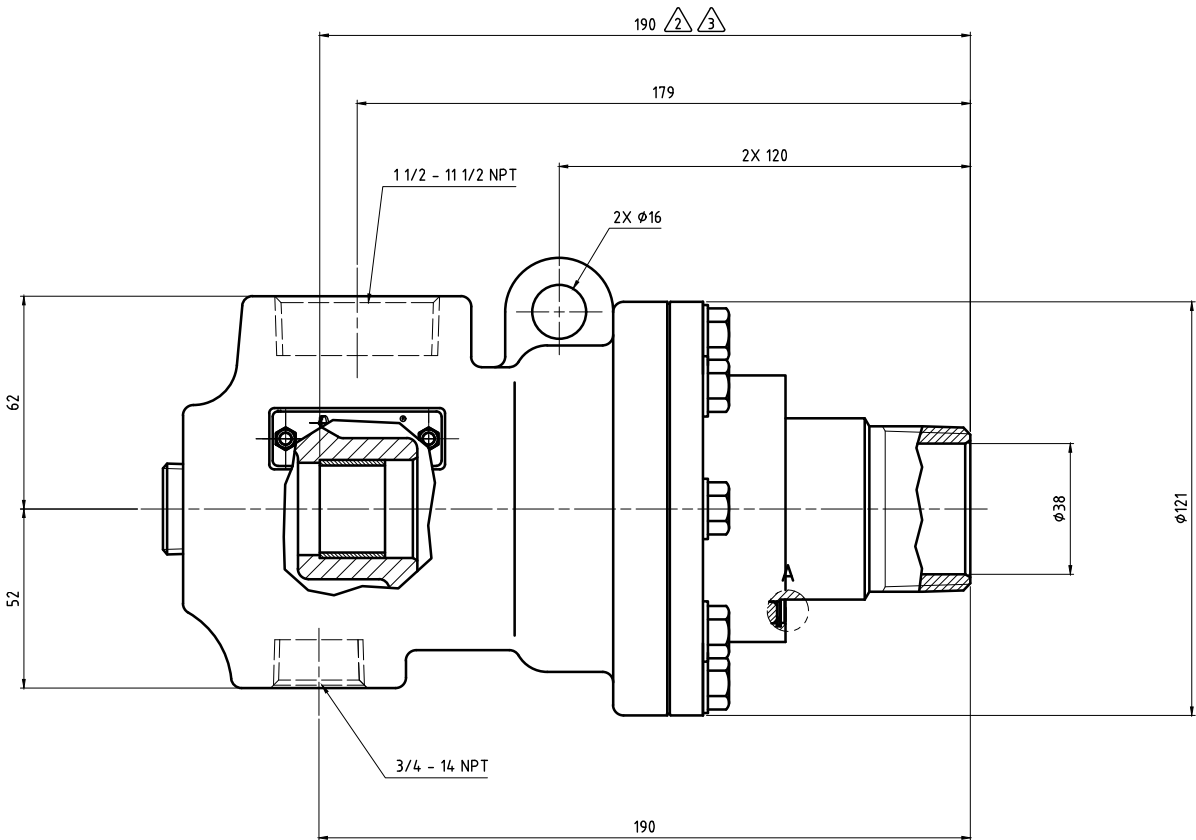


- NOTES:
- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - 2 - PIPE LENGTH INTO UNION.
 - 3 - PIPE SUPPLIED BY CUSTOMER.
 - 4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

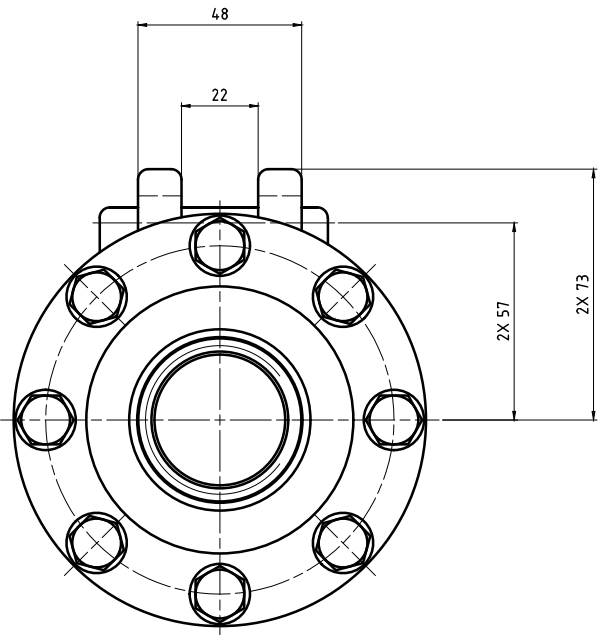

SEAL WEAR DETAIL
A (5:1)

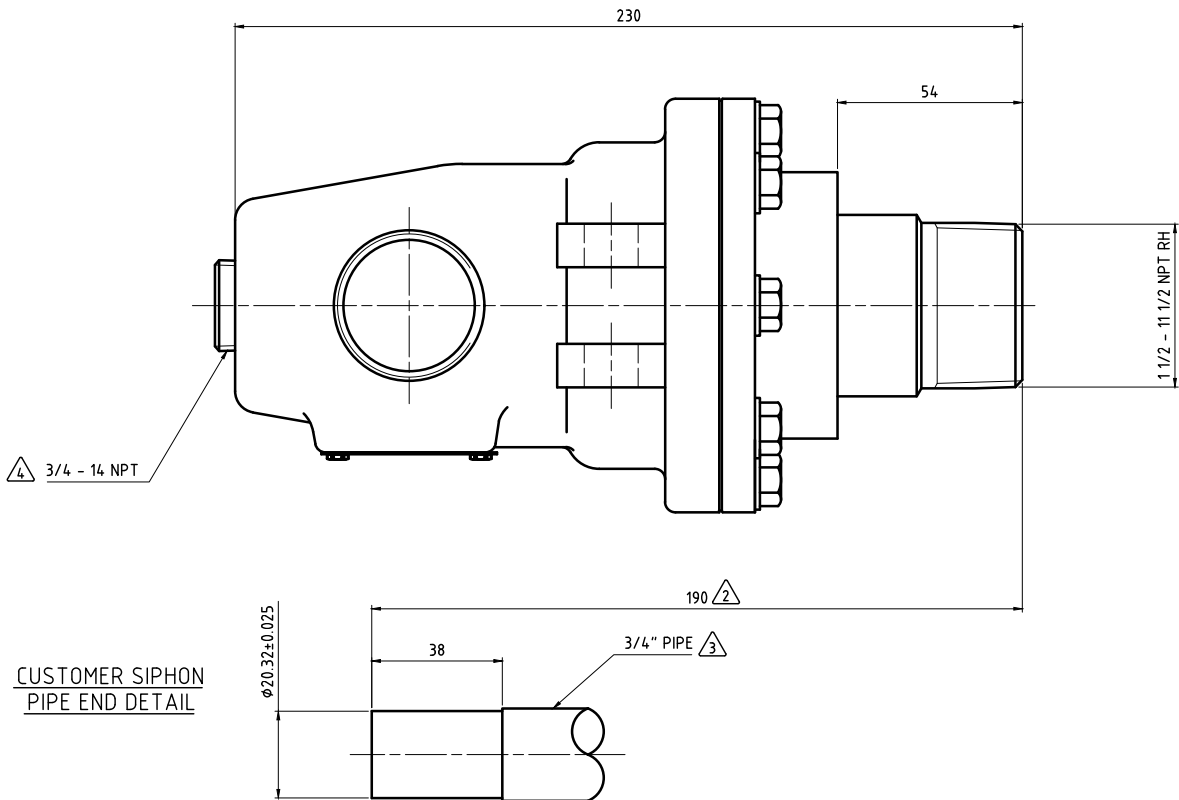

CUSTOMER SIPHON
PIPE END DETAIL

OPERATING DATA		
MEDIA	THERMAL OIL	
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN	NO	

		PROJECTION:	SCALE: 1:1
		MATERIAL:	INTERFACE CONTROL DRAWING
DATE	NAME	TITLE:	UNION TYPE C ROTATING SIPHON NPT PORTS 1-1/2" NPT RH ROTOR
DRN: 10/26/2016	DDchoa		
ENGR:			
APPD:			
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		NO.	BC-54205-24-20
ISSUE	MODIFICATION	ECO	DATE
			SIGN
			SHEET A1