


CONFIDENTIAL
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Ø58.7	h13	0.008	58.700
Dimen.	Fit	-0.460	58.240

NOTES:

- ① - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM FOR INSTRUCTION MANUAL: 040-561
- ② - FITTING TO BE ASSEMBLED HAND-TIGHT.
- ③ - TORQUE LUG PROVIDED FOR ANTI-ROTATION. DO NOT RESTRICT MOVEMENT OF UNION.
- ④ - PIPE SUPPLIED BY CUSTOMER. PIPE SIZE: 2"
- ⑤ - PIPE LENGTH.

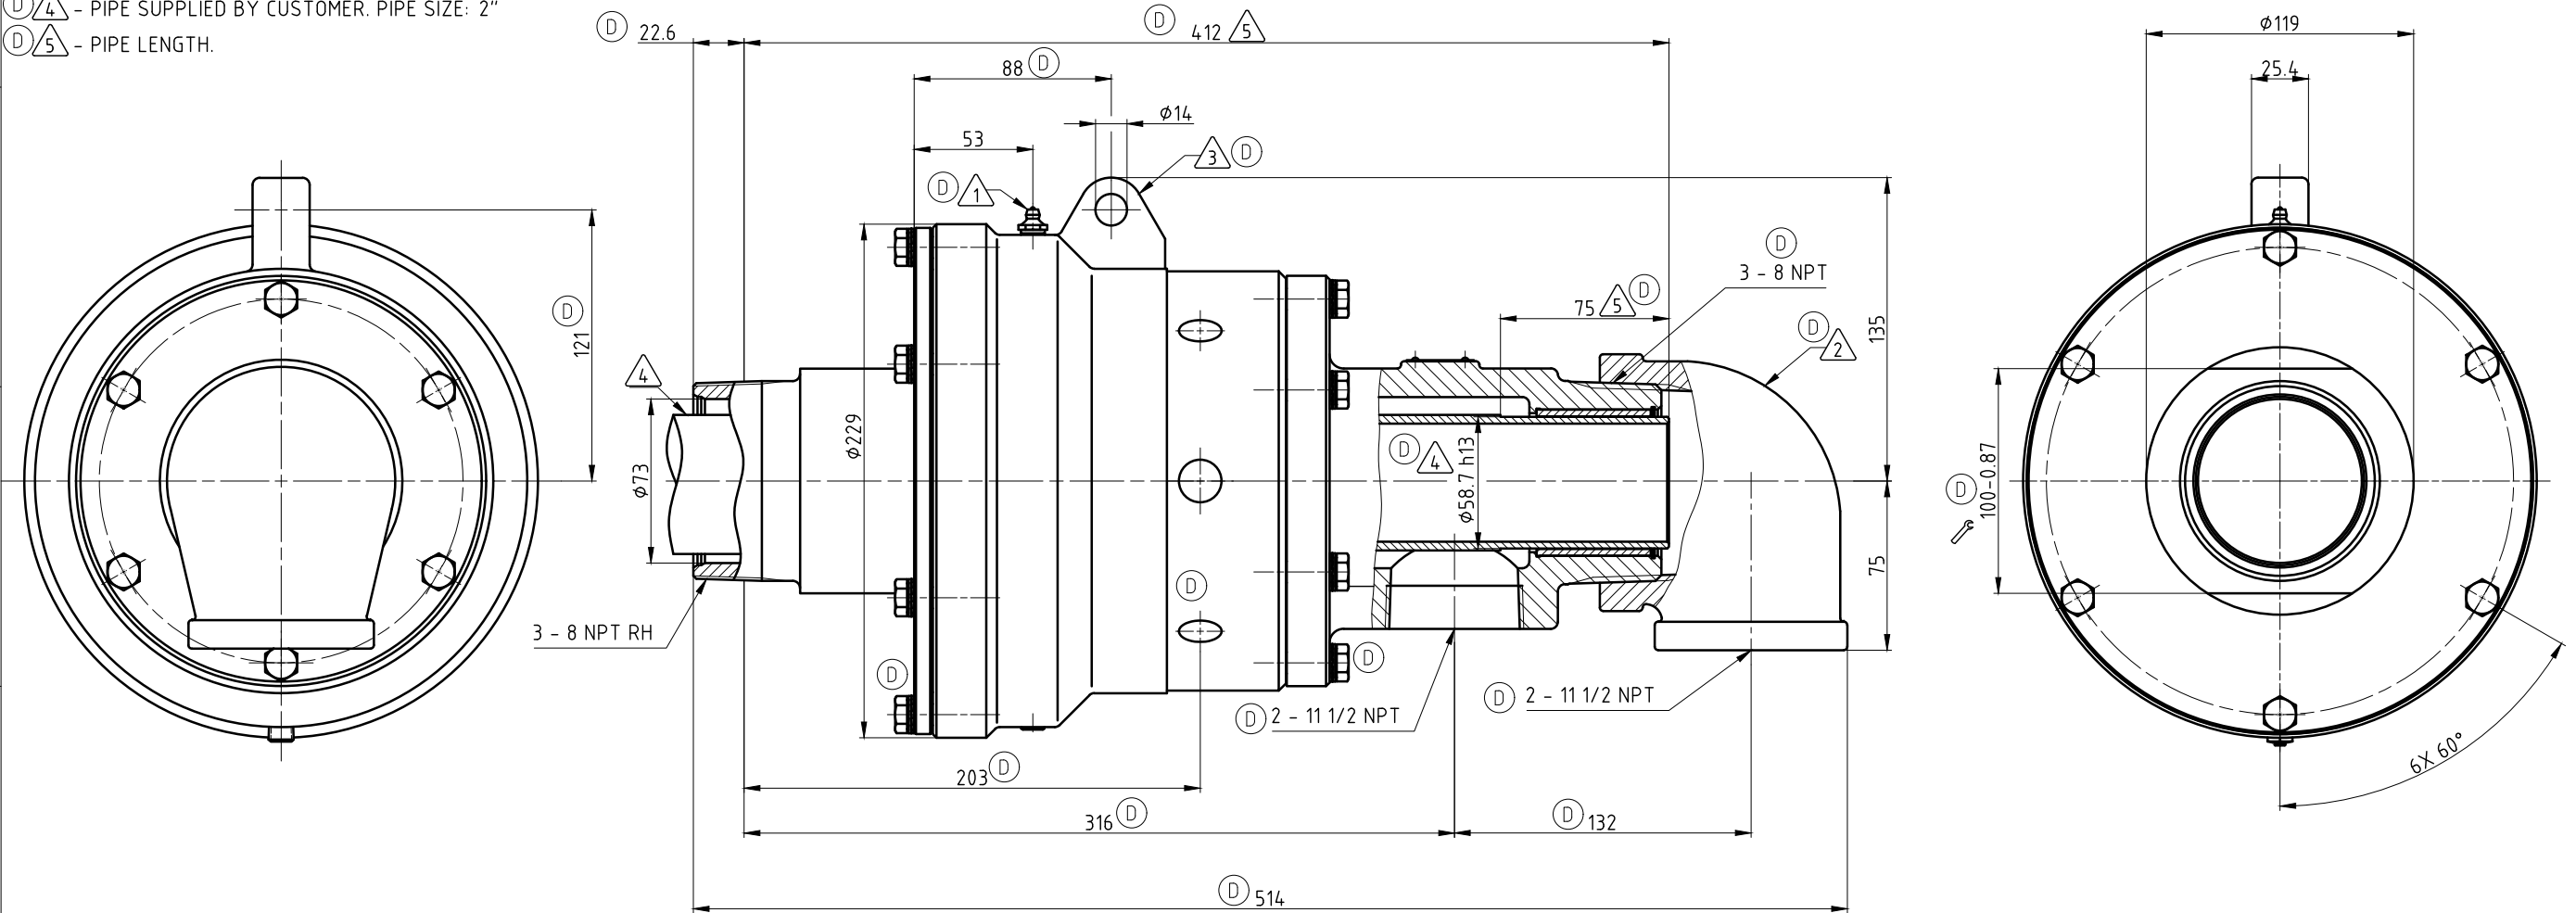

OPERATING DATA	
MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	750 min ⁻¹
TEMPERATURE MAX.	121 °C
DRY RUN (WITHOUT ANY MEDIA)	NO
RECOMMENDED FILTRATION	60 micron
FLOW MAX	681 L/min
TORQUE	10.9 Nm



PROJECTION:



SCALE: 1:2

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN UNION

NO. 6300-002-157

SHEET A2

DATE	NAME
DRN. 01/20/03	RM
ENGR. 01/20/03	ARS
APPD.	

A	SEE CO	62511	07/22	MTS
ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE