


1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550

△₃ - ACROSS FLATS.


CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

ø28	g6	-0.007 -0.020	27.993 27.980
ø28	H7	+0.021 0	28.021 28.000
M a B	Toleranz		

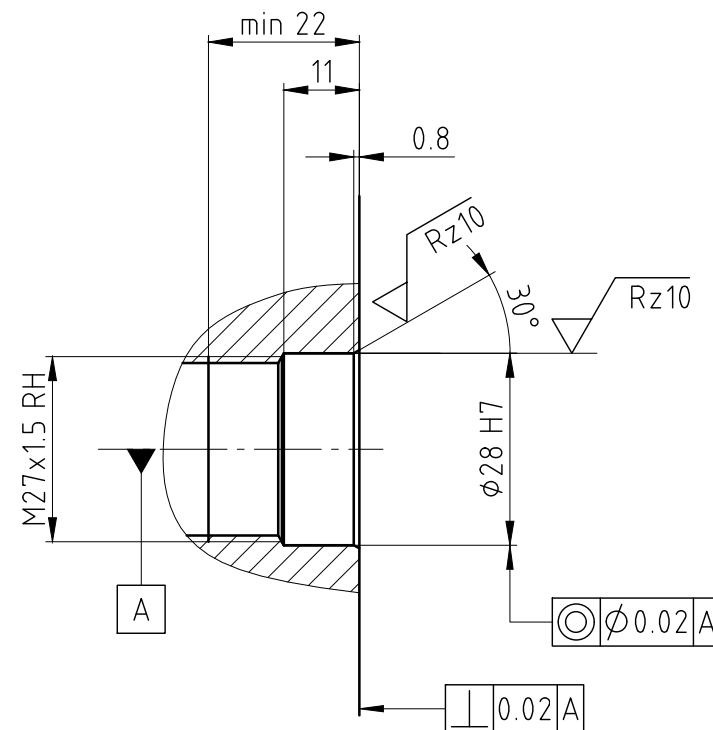

OPERATING DATA			
MEDIA	WATER (A)	SATURATED STEAM (INTERMITTENT)	HOT OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹		
TEMPERATURE MAX.	120 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		



MATERIAL:

INTERFACE CONTROL DRAWING

DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

255-269-458

SHEET
A3

A	WAS 10 bar	026054	02.12.13	HS
ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE