
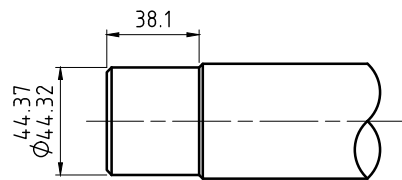



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:




- 1 - PIPE SUPPLIED BY CUSTOMER.
2 - PIPE LENGTH.
3 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN
FOR APPROPRIATE SERVICE KIT.
4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

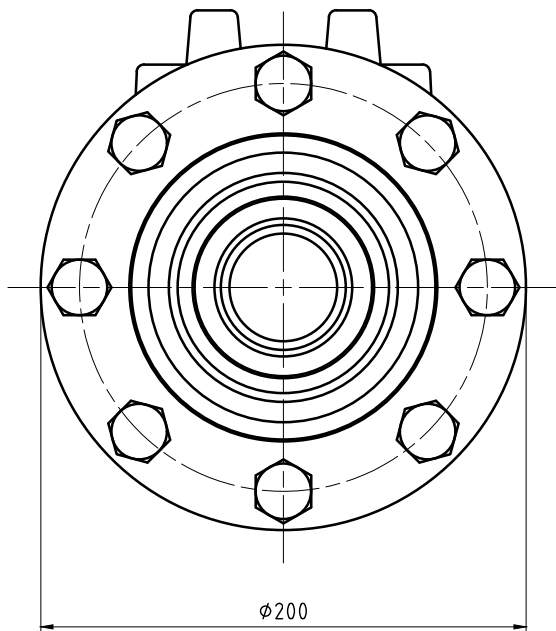

1 PIPE DETAIL

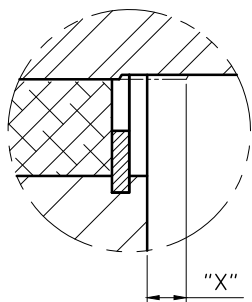

3 SEAL WEAR DETAIL
A (5:1)

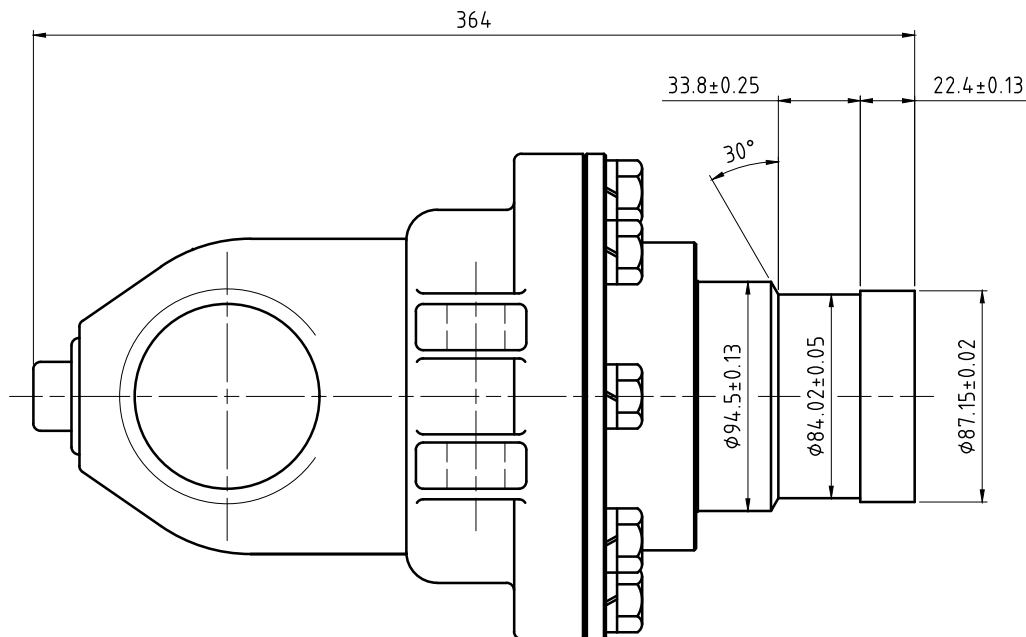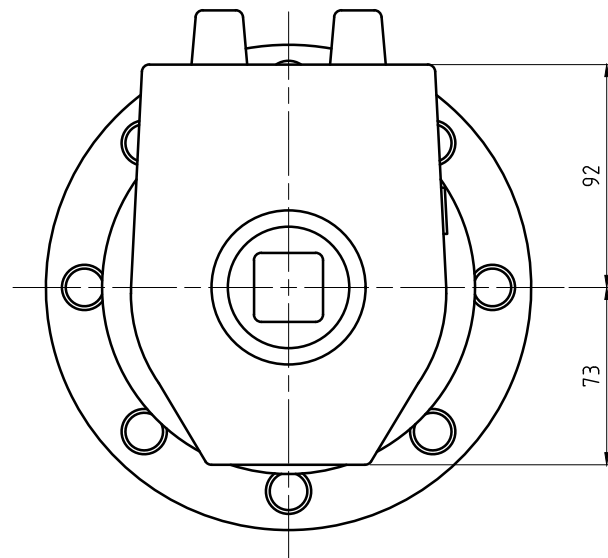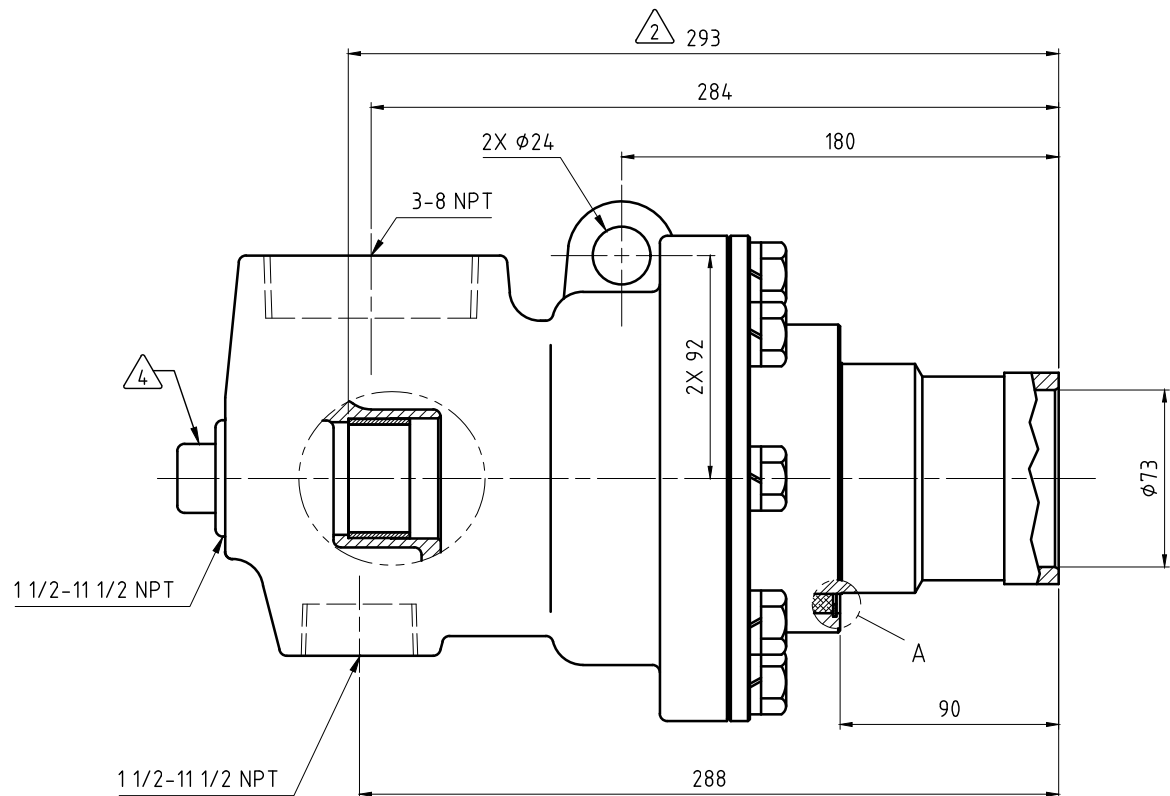

OPERATING DATA		
MEDIA	THERMAL OIL	
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	350 min ⁻¹
DRY RUN	NO	



PROJECTION: 1:2
MATERIAL: INTERFACE CONTROL DRAWING

ISSUE	MODIFICATION	ECO	DATE	SIGN

DATE	NAME
DRN. 01/05/16	N. Reyna
ENGR. 01/05/16	T. Wilson
APPD.	

TITLE:	DEUBLIN UNION
NO.	BC-54205-48-32
SHEET	A2

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE