
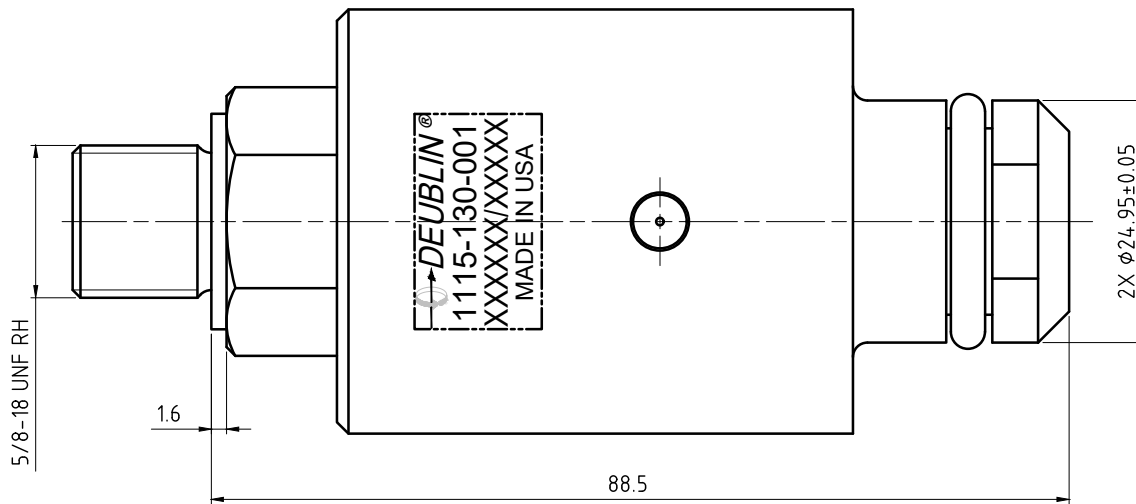
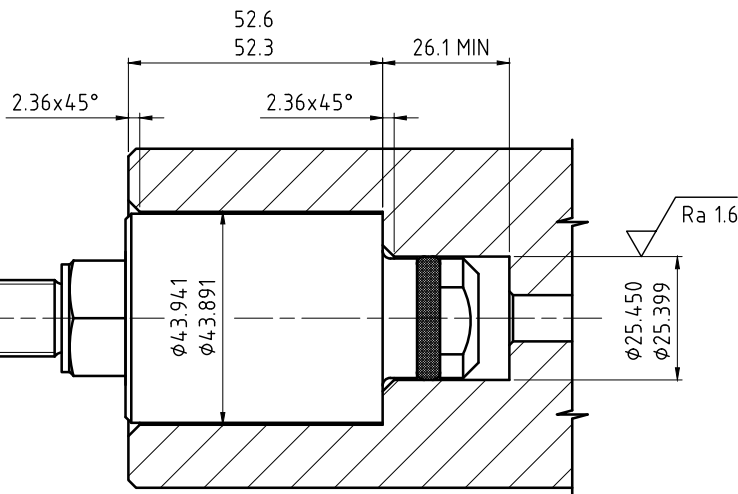
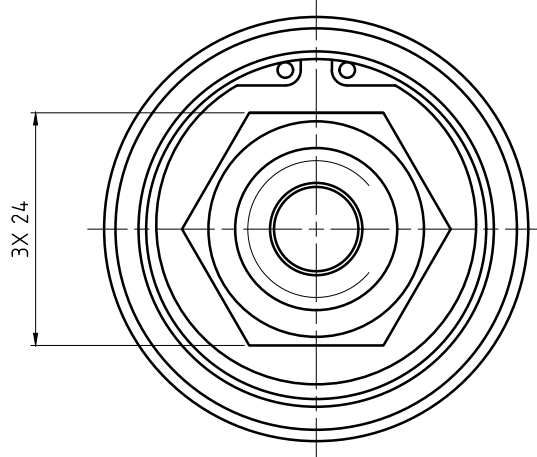
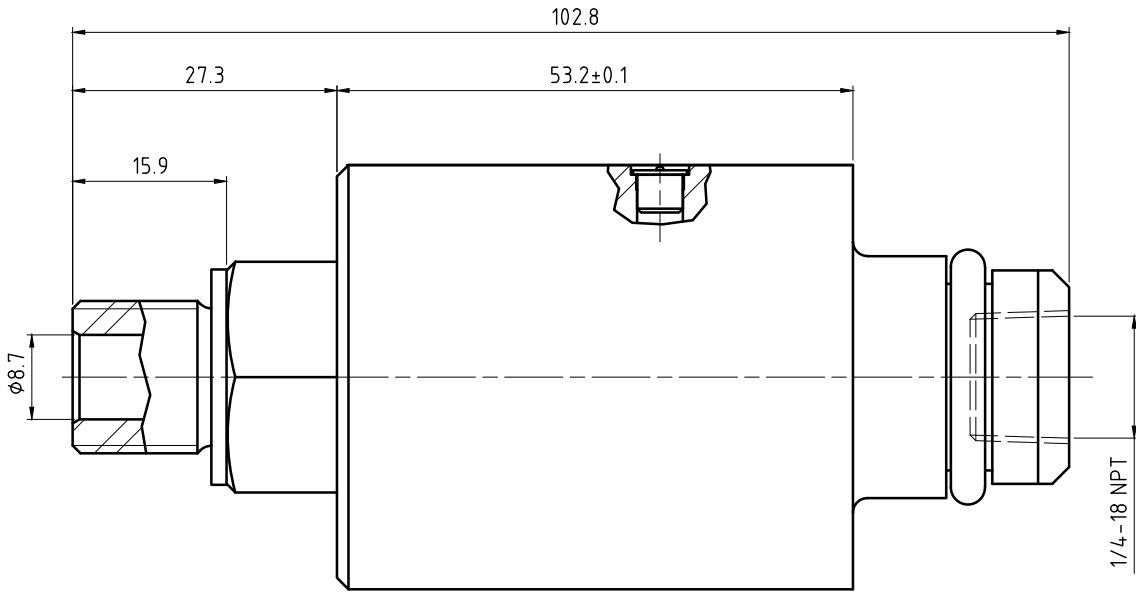
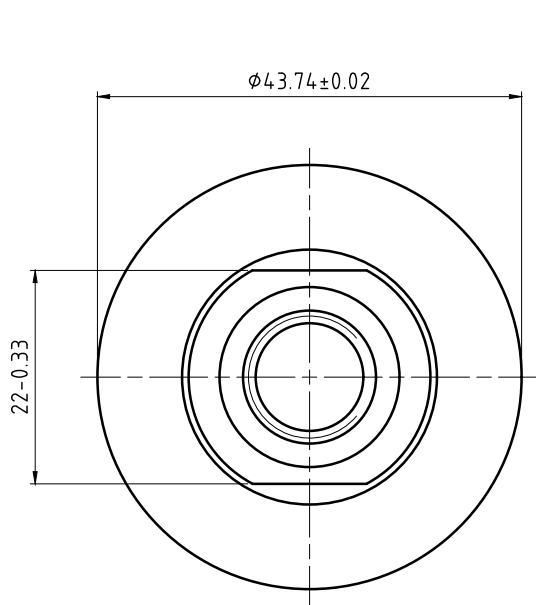


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX VACUUM	28" Hg	6.7 kPa
MAX HYD. PRESSURE	500 PSI	34 bar
MAX SPEED	3500 RPM	3500/min
MAX TEMPERATURE	250°F	121°C

CUSTOMERS SHAFT MACHINING DETAIL

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1				
							MATERIAL:	INTERFACE CONTROL DRAWING			
					DATE	NAME	TITLE:	DEUBLIN UNION			
					DRN. 02/06/13	N. Reyna					
					ENGR. 02/06/13	S. Stasi					
					APPD.						
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN							