

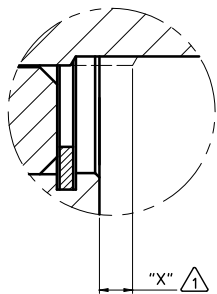
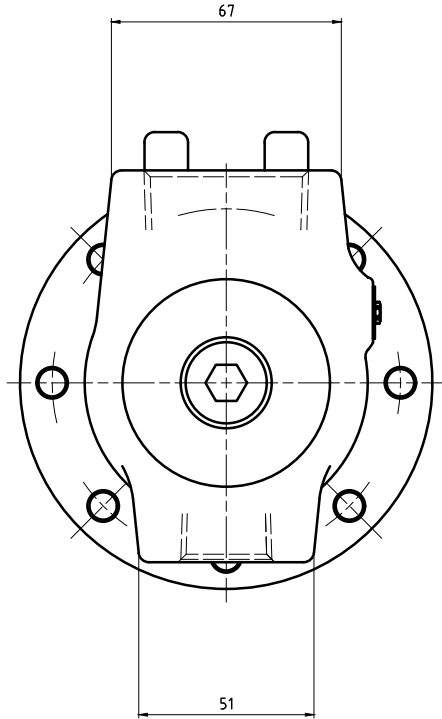
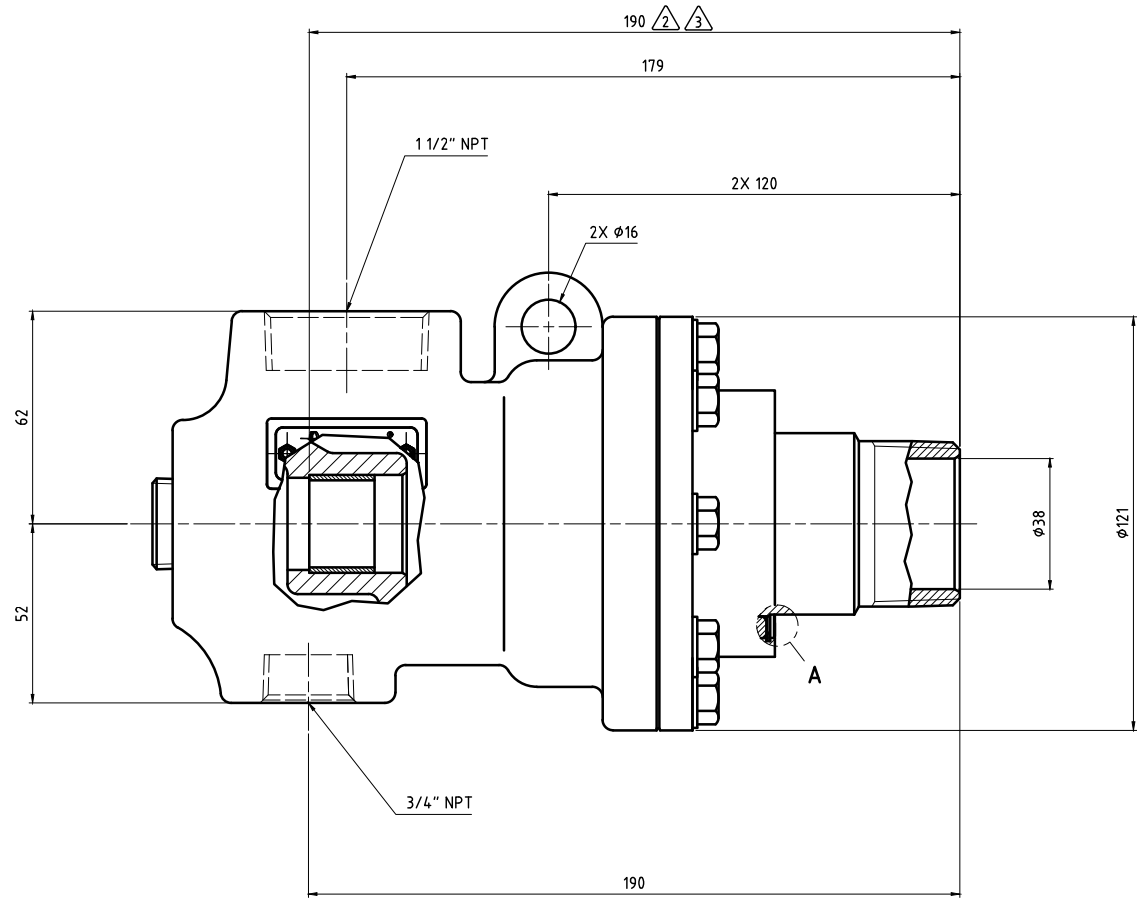


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, REPRODUCTION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

- NOTES:
- ⚠ - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - ⚠ - PIPE LENGTH INTO UNION.
 - ⚠ - PIPE SUPPLIED BY CUSTOMER.
 - ⚠ - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

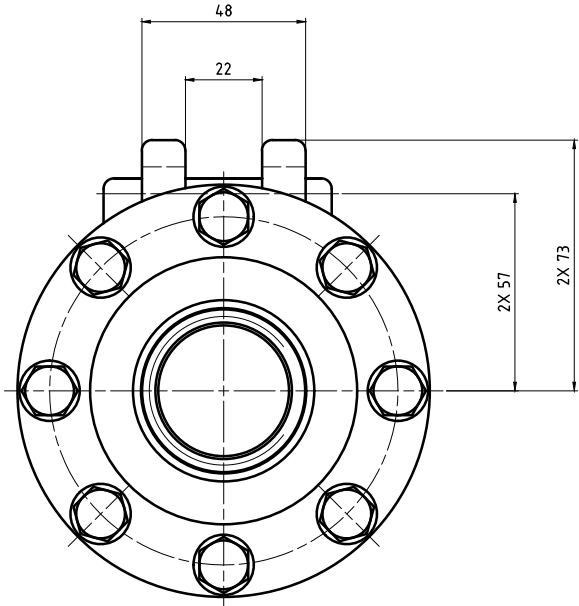

SEAL WEAR DETAIL
A (5:1)

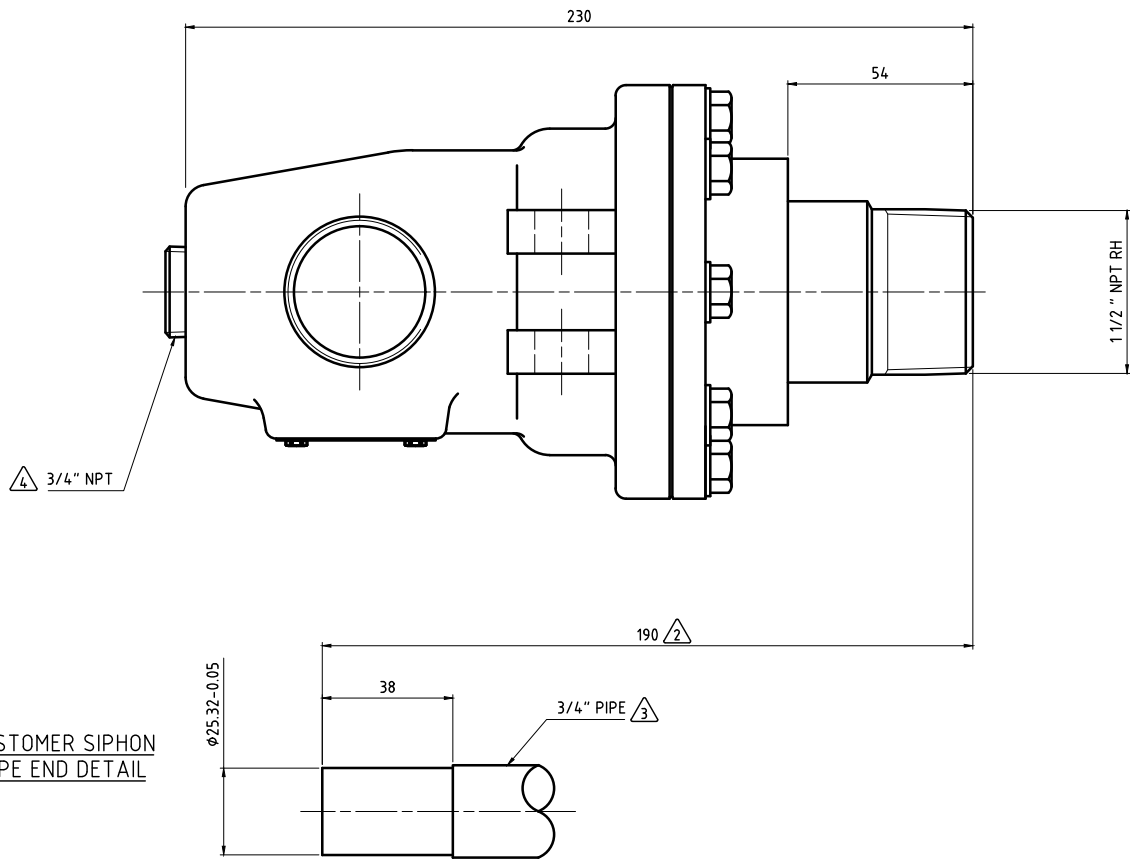

CUSTOMER SIPHON
PIPE END DETAIL

OPERATING DATA		
MEDIA	STEAM	
PRESSURE	MAXIMUM	17.2 bar
TEMPERATURE	MAXIMUM	208 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN	NO	

 DEUBLIN® Engineered for Performance				PROJECTION 		SCALE: 1:1				
						MATERIAL: INTERFACE CONTROL DRAWING				
				DATE	NAME	TITLE: UNION TYPE C ROTATING SIPHON				
				10/17/2016	DOchoa	NPT PORTS 1 1/2" NPT RH ROTOR				
				ENGR	10/17/2016					L.Freed
				APPD						
							NO.			
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						BC-54205-24-50				
ISSUE	MODIFICATION	ECO	DATE	SIGN						
					SHEET A1					