
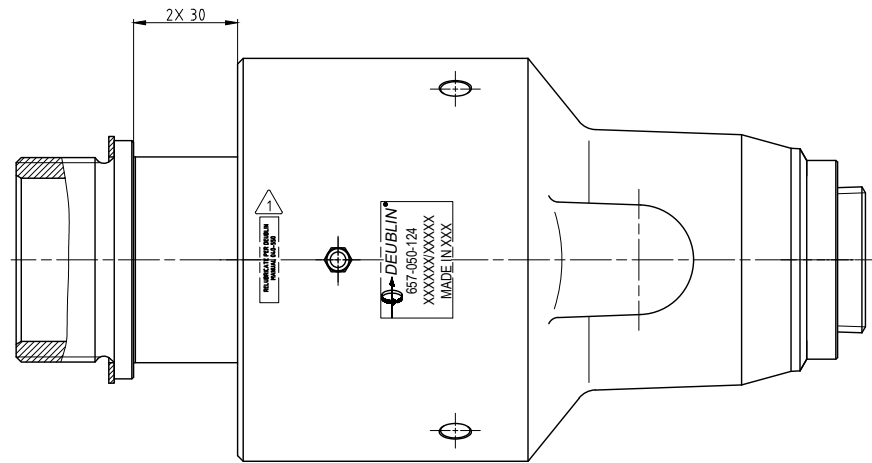
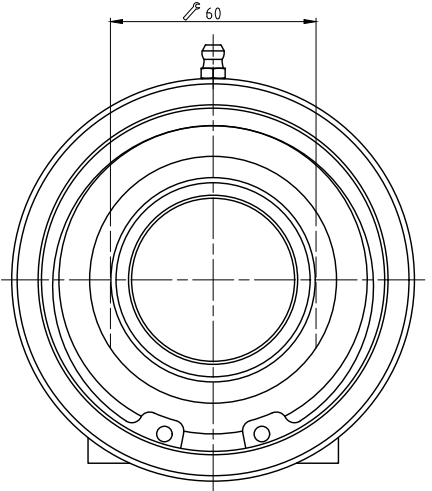


NOTES:

- ① - CONTACT DUBLIN OR VISIT WWW.DEUBLIN.COM FOR INSTRUCTION MANUAL: 040-550
- ② - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
- ③ - GASKET THICKNESS.

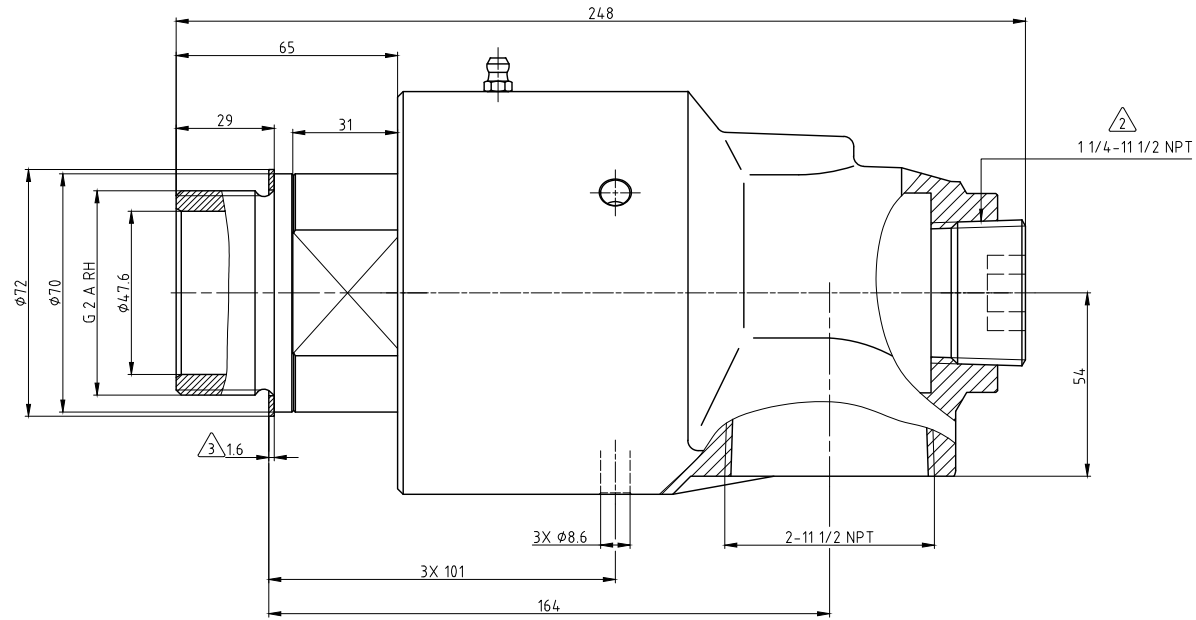

OPERATING DATA		
MEDIA	WATER	THERMAL OIL
PRESSURE MAX.	20 bar	6.6 bar
SPEED MAX.	750 min ⁻¹	
TEMPERATURE MAX.	93 °C	
DRY RUN (WITHOUT ANY MEDIA)	NO	
RECOMMENDED FILTRATION	60 micron	

 DEUBLIN HOSE-ROTARY JOINTS				PROJECTION: 		SCALE: 1:1 MATERIAL:		A
						INTERFACE CONTROL DRAWING		
				DATE	NAME	TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung		SHEET A2
			DRAWN: 06.12.2022	ENG: MZE				
			APPROVED: 06.12.2022	MSK				
						NO.		
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						657-050-124		
ISSUE	MODIFICATION	ECO	DATE	SIGN				