
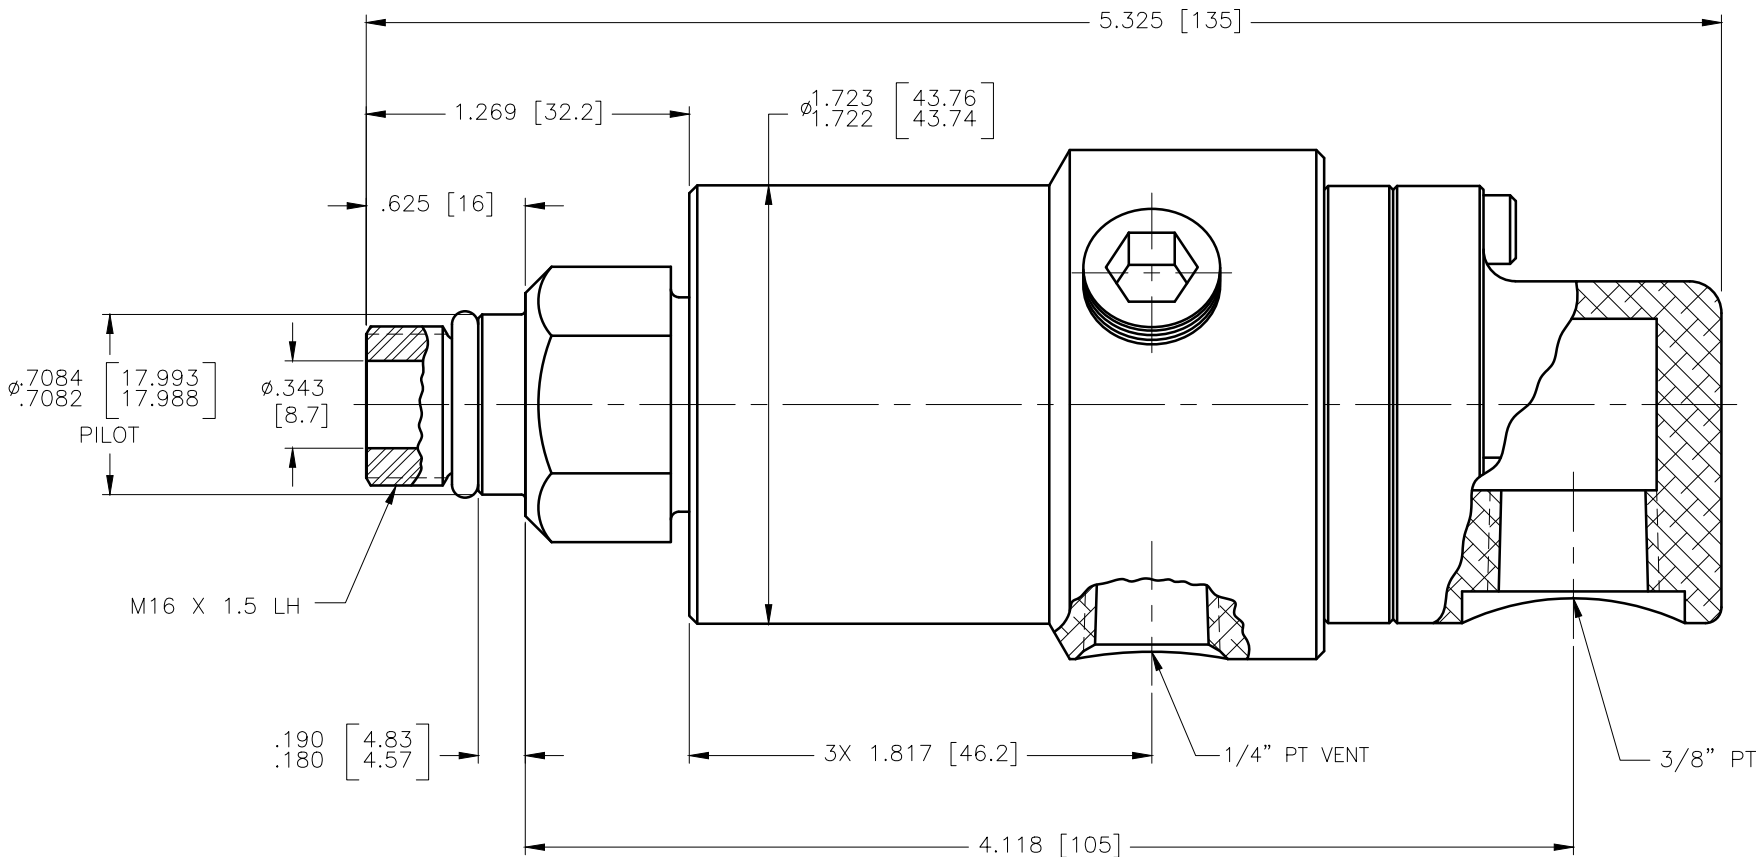


NOTES:

- 1 - WHEN MOUNTING THE UNION IN THE VERTICAL POSITION, THE DRAIN LINE MUST BE POSITIONED NO HIGHER THAN THE VENT HOLE.
- 2 - WHEN MOUNTING IN THE HORIZONTAL POSITION, THE DRAIN LINE MUST BE POSITIONED DOWNWARD (6 O'CLOCK).

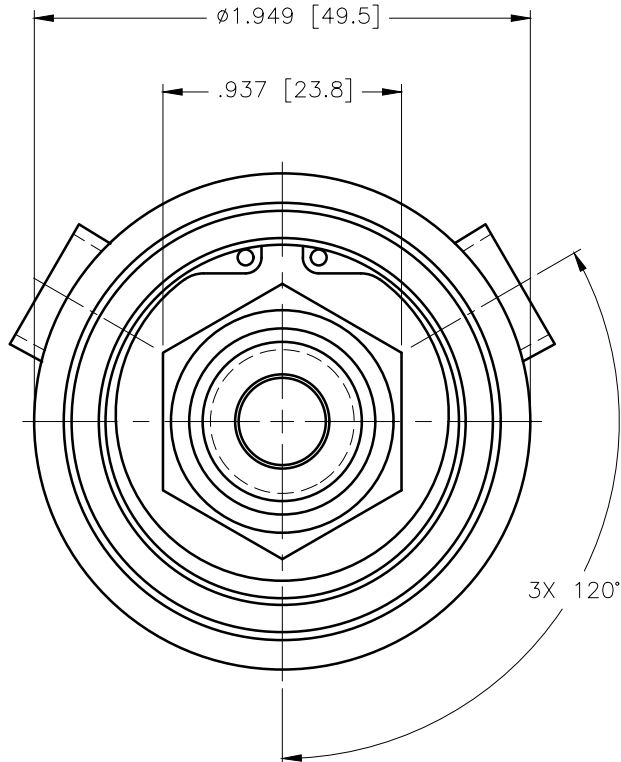

OPERATING DATA:

COOLANT SERVICE

1000 PSI (70 bar) MAX.PRESSURE*


(A) 12,000 RPM (12,000/min) MAX.SPEED

160°F (70°C) MAX.TEMPERATURE

13 GPM (50 L/min) FLOW RATE

RECOMMENDED FILTRATION = 25 MICRONS

* REFER TO GRAPH FOR MAXIMUM PRESSURE AND SPEED COMBINATIONS

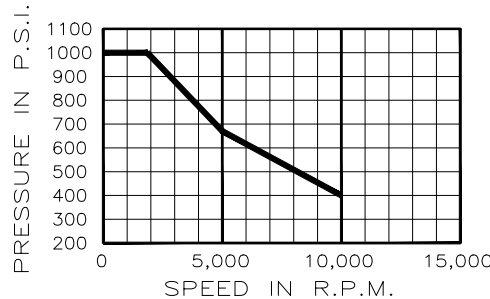

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

FILE:	INTERFACE CONTROL DRAWING FOR DEUBLIN UNION 902-140-188
-------	---

NO.	C.A.D DRAWING
902-140-188	

A	REVISED DATA WAS 10,000	031072	11/14	NR	
LET.	REVISION	ECO	DATE	SIGN	

EQUIPMENT RE

**ASSY/TEST FIX
REQUIRED:**

SCALE	2:1	DWG SIZE
DRN	RM	10/10/
ENGR	ARS	10/10/
APPD	ARS	10/10/

UNLESS SPECIFICALLY
TOLERANCED, ALL
DIMENSIONS ARE
REFERENCE
DIMENSIONS IN []
ARE IN MILLIMETER

NO.