


NOTES:

- 1 - CONTACT DEUBLIN OR VISIT [WWW.DEUBLIN.COM](http://WWW.DEUBLIN.COM)  
FOR INSTRUCTION MANUAL: 040-555
- 2 - TORQUE TO 35Nm.
- 3 - REDUCER 3/8 NPT TO 1/4 NPT.

CONFIDENTIAL  
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY  
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,  
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT  
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR  
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

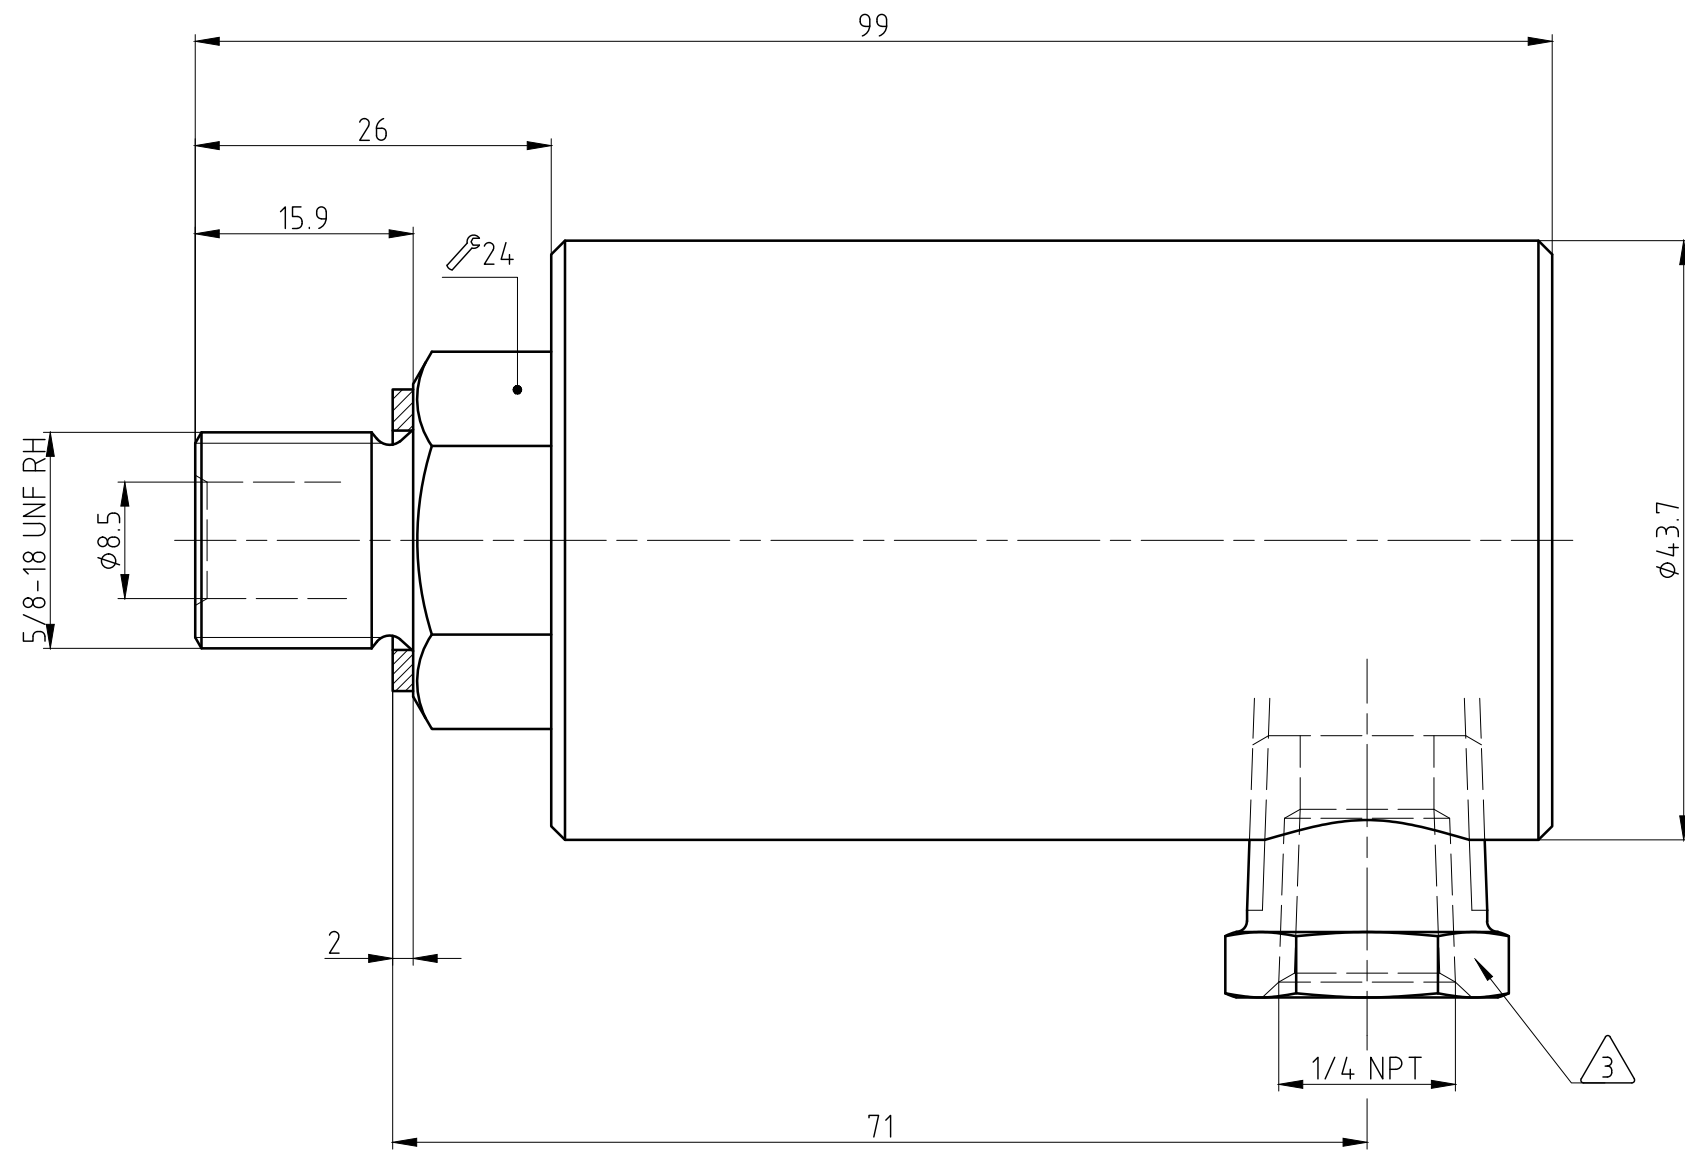


OPERATING DATA

|                             |                        |               |
|-----------------------------|------------------------|---------------|
| MEDIA                       | AIR                    | HYDRAULIC OIL |
| PRESSURE MAX.               | 10 bar                 | 35 bar        |
| SPEED MAX.                  | 3500 min <sup>-1</sup> |               |
| TEMPERATURE MAX.            | 120 °C                 |               |
| DRY RUN (WITHOUT ANY MEDIA) | NO                     |               |



PROJECTION:



SCALE: 2:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE:

DEUBLIN ROTATING UNION  
DEUBLIN Drehdurchführung

NO.

1115-276-001

SHEET

A2

UNLESS SPECIFICALLY TOLERANCED, ALL  
DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE MODIFICATION ECO DATE SIGN