
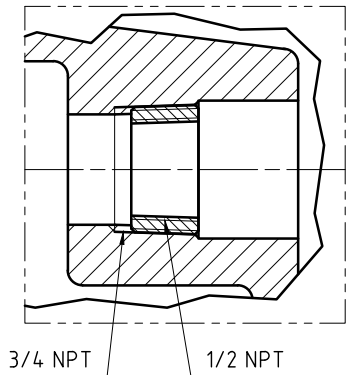
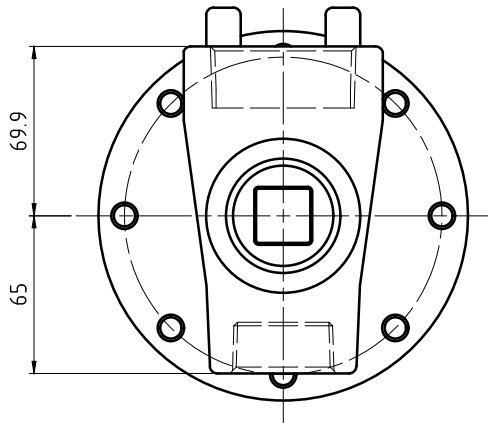
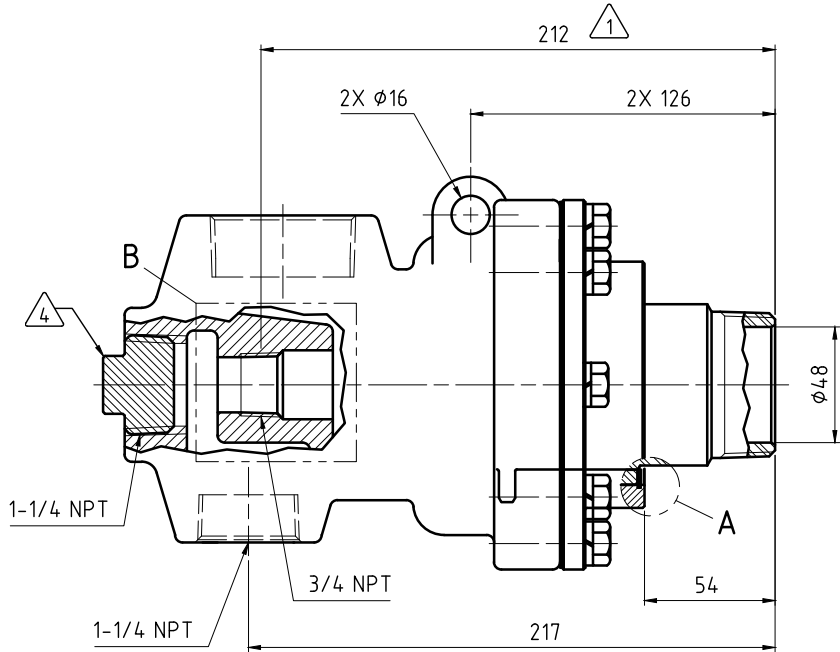




CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:


- ① - PIPE LENGTH INTO UNION.
② - SEALS SHOULD BE REPLACED WHEN "X" DIMENSION EXCEEDS 7.9.
③ - 3/4" NPT TO 1/2" NPT FACE BUSHING INCLUDED.
④ - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

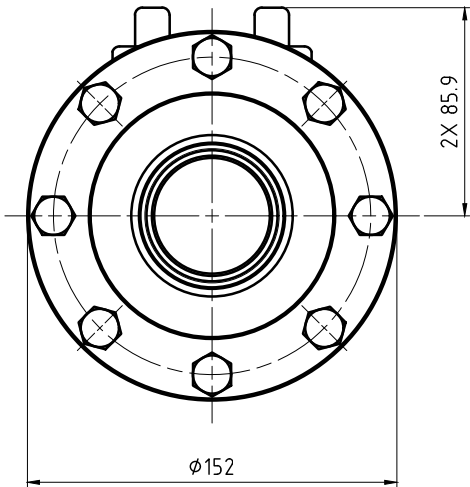

DETAIL B ③

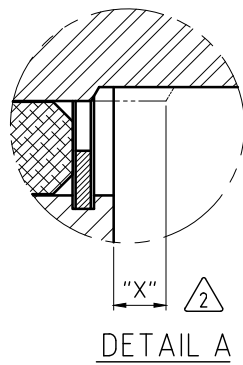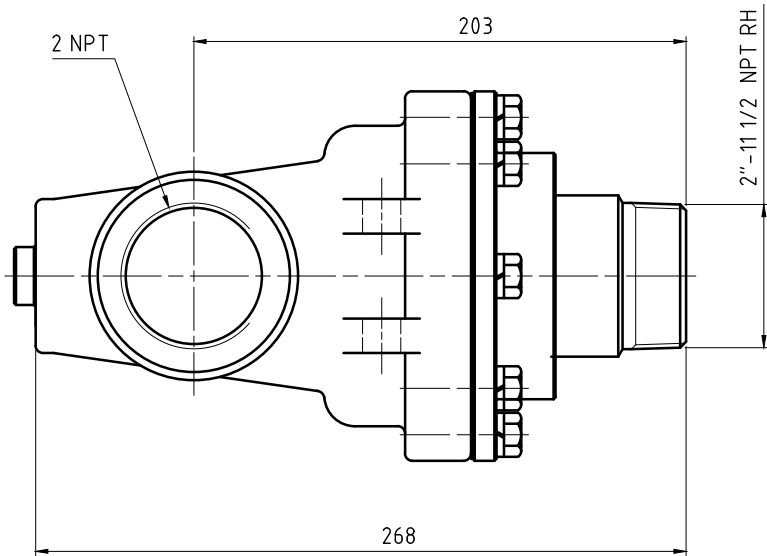

DETAIL A

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 1:2								
							MATERIAL:		INTERFACE CONTROL DRAWING						
					DATE	NAME	TITLE:		DEUBLIN UNION						
					DRN.	12/10/13	N. Reyna								
					ENGR.	12/10/13	L. Freed								
					APPD.										
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						NO. BC-54000-32-20		SHEET A2		
ISSUE															MODIFICATION