


- NOTES:
- 1 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1116-600-249.
 - 2 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED. IF OPERATING CONDITIONS ARE MARGINAL, PLEASE CONSULT DEUBLIN ENGINEERING.
 - 3 - RECOMMENDED FILTRATION IS 25 MICRONS.
 - 4 - DO NOT RUN DRY.

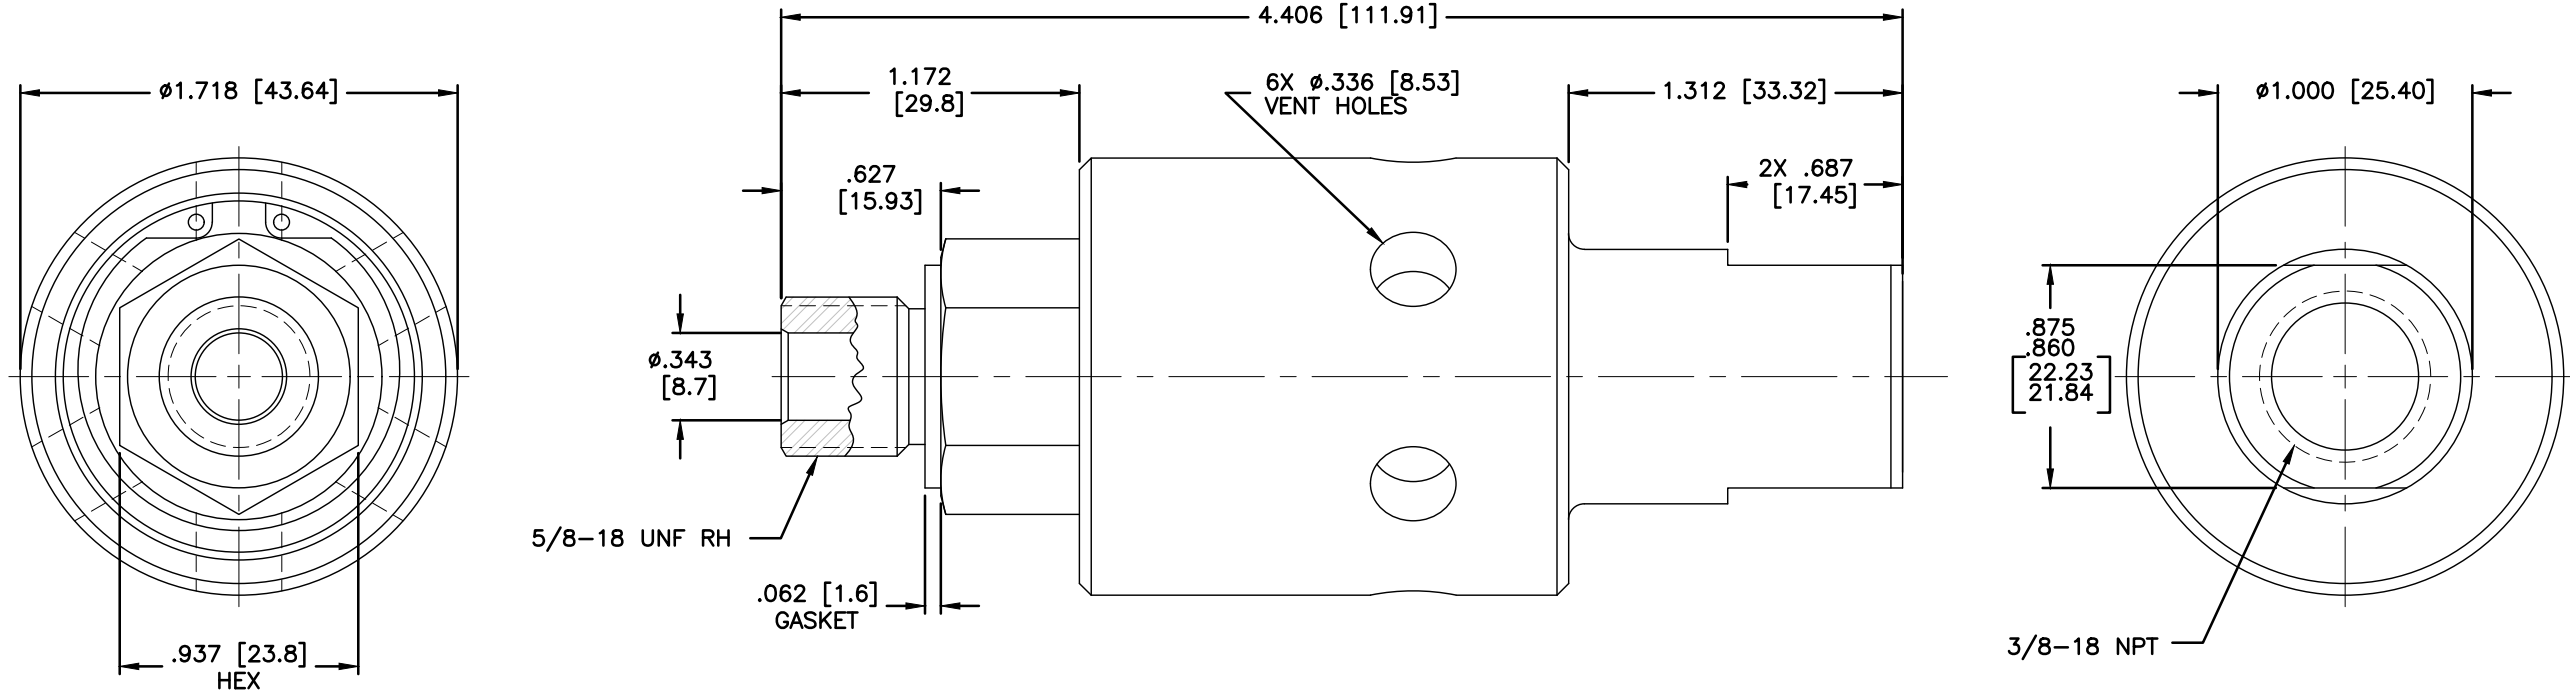

OPERATING DATA		
MEDIA	COOLANT	
MAX COOLANT PRESSURE	1000 PSI	70 bar
MAX SPEED	1,500 RPM	1,500/min
MAX FLOW RATE	13.8 GPM	50 L/min
MAX TEMPERATURE	250°F	121°C

					SCALE	2:1	DWG SIZE	C
					DRN	RM	09/22/05	
					ENGR	ARS	09/22/05	
					APPD	ARS	09/22/05	
					PART NO.			
					1116-600-249			
					CUSTOMER			
LET.	REVISION			ECO	DATE	SIGN		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE

DIMENSIONS IN [] ARE IN MILLIMETERS.

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

 **DEUBLIN** COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL
DRAWING FOR DEUBLIN
UNION 1116-600-249

DWG. NO. 1116-600-249
C.A.D. DRAWING