
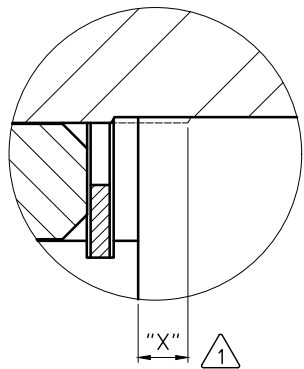
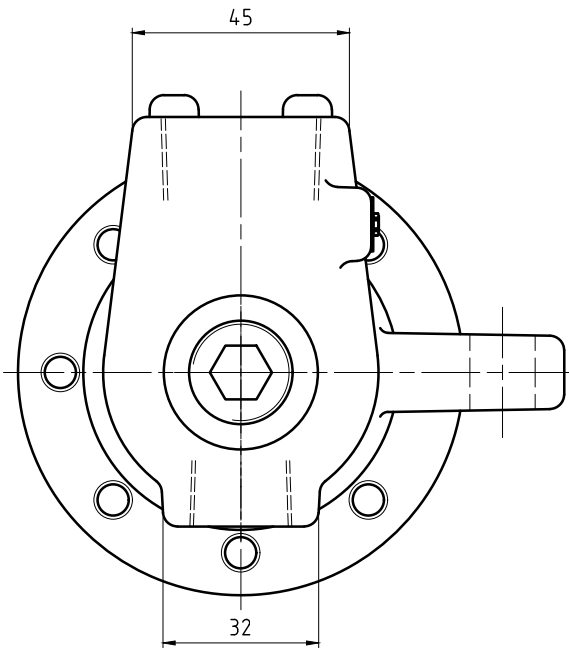
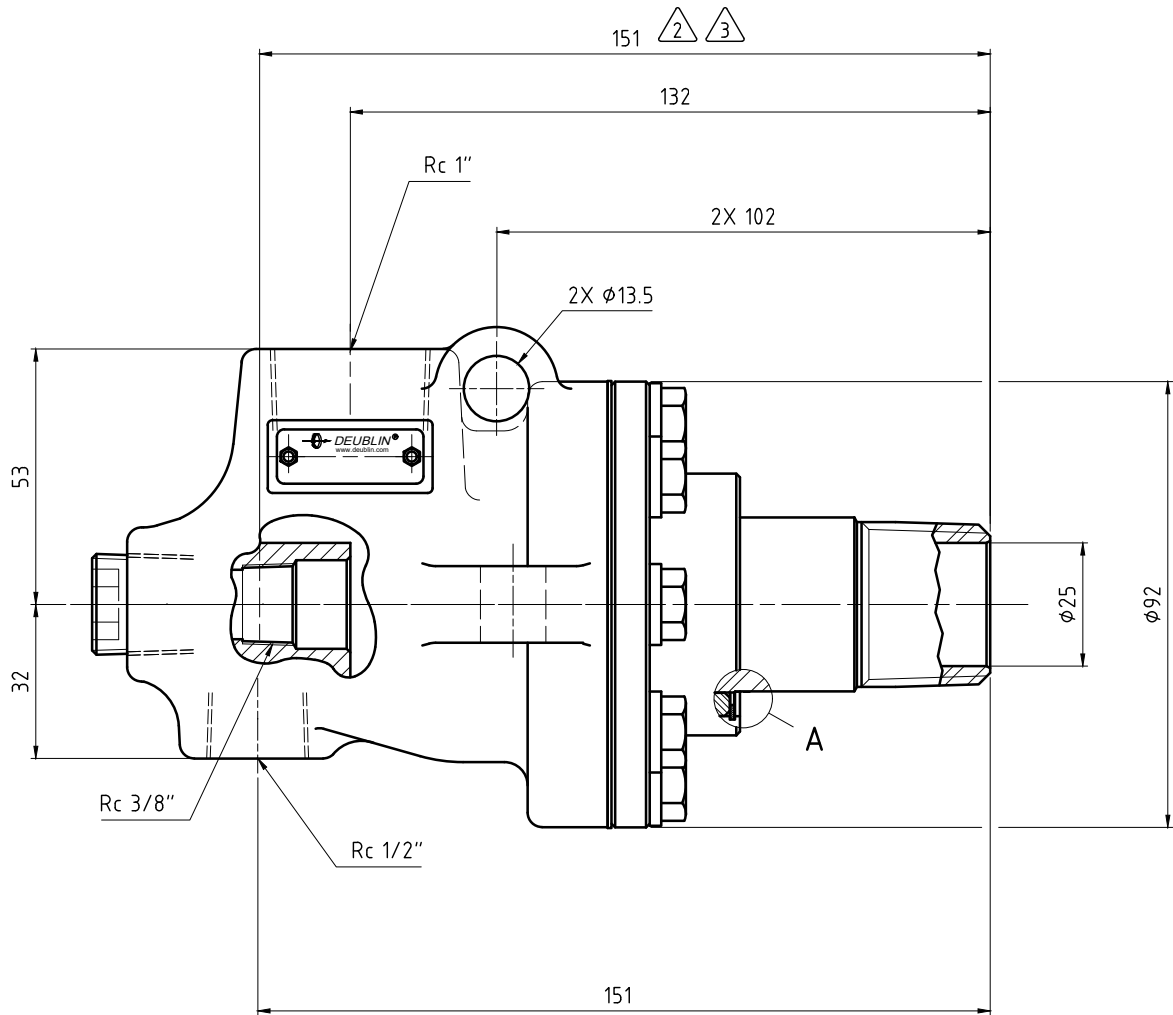



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

- NOTES:
- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - 2 - PIPE LENGTH INTO UNION.
 - 3 - PIPE SUPPLIED BY CUSTOMER.
 - 4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

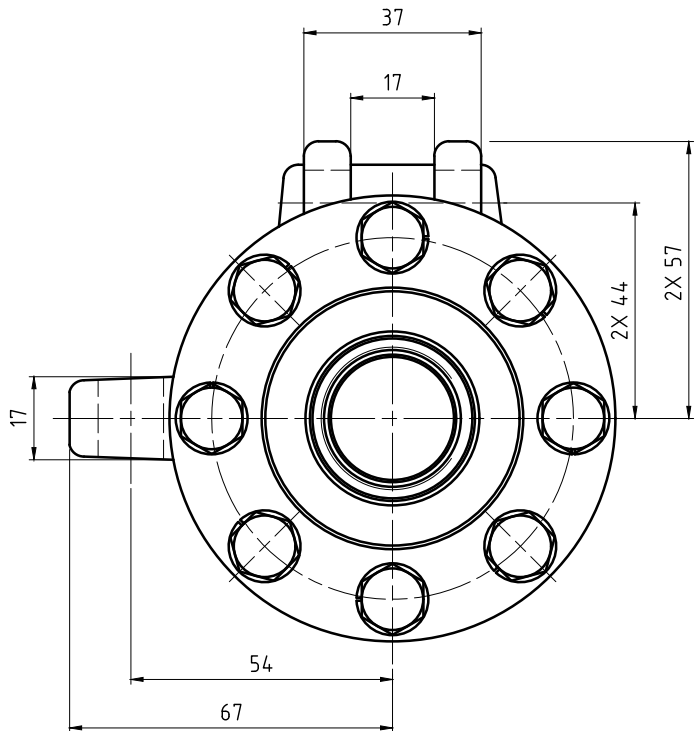

SEAL WEAR DETAIL

A (5:1)

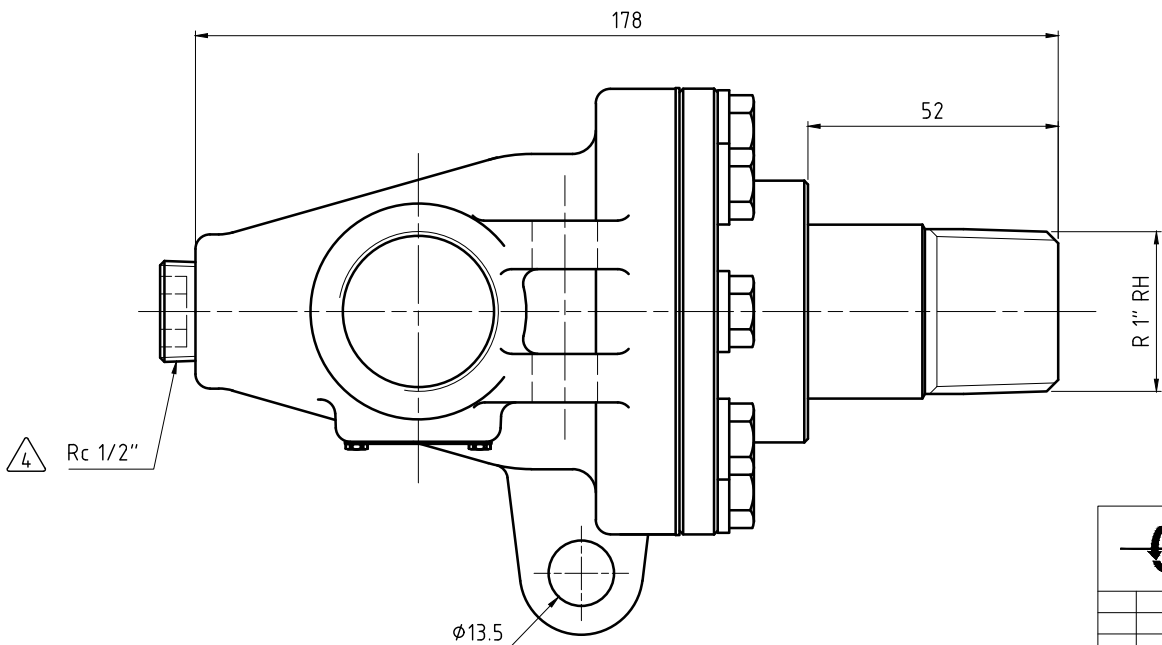

OPERATING DATA		
MEDIA		STEAM
PRESSURE	MAXIMUM	17.2 bar
TEMPERATURE	MAXIMUM	208 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN		NO



PROJECTION:

SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE: UNION TYPE C FIXED SIPHON
Rc PORTS R 1" RH ROTOR

NO.

BC-54000-16-50B

SHEET

A2

ISSUE	MODIFICATION	ECO	DATE	SIGN

DATE	NAME
DRN. 08/30/2013	lgalindo
ENGR. 03/17/2014	L. Freed
APPD.	

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE