

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.



 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550

△2 - DEPENDING ON COUNTRY OF ORIGIN, HEX STOCK MAY VARY AS NOTED. SEE TABLE FOR ACCEPTABLE WRENCH SIZES.

3 - PIPE LENGTH.

 - GASKET THICKNESS.

5 - FITTING TO BE ASSEMBLED HAND-TIGHT, OR MAY BE SHIPPED UNASSEMBLED.

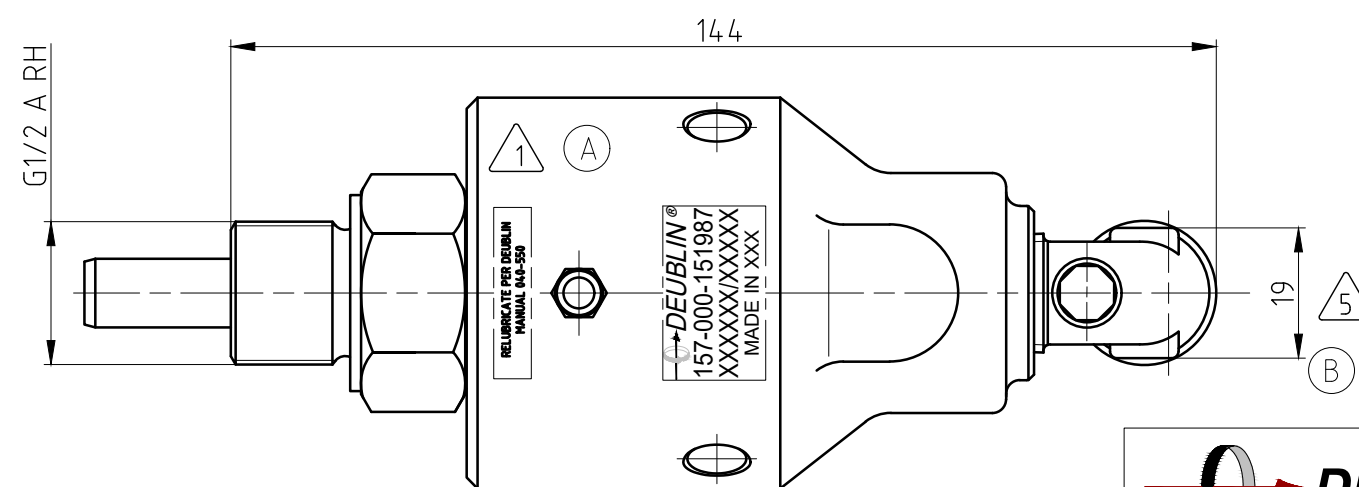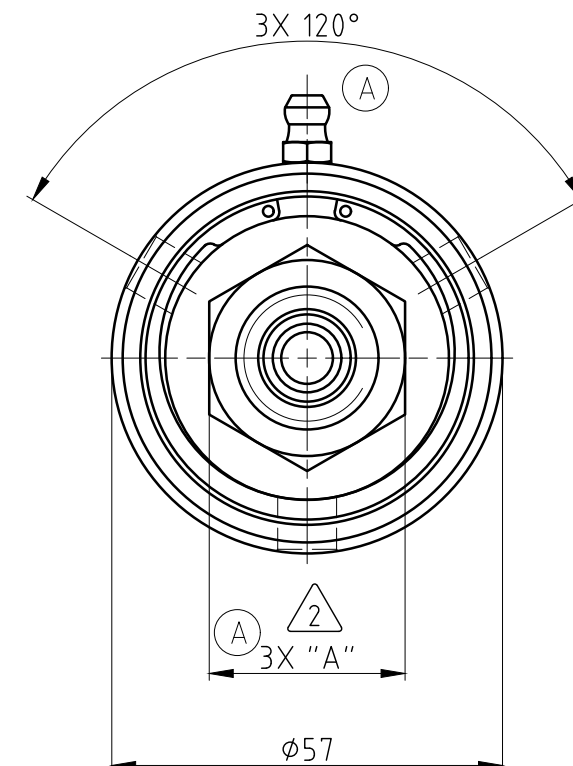

OPERATING DATA			
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	THERMAL OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹		
TEMPERATURE MAX.	121 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		
RECOMMENDED FILTRATION	60 micron		




MATERIAL:	INTERFACE CONTROL DRAWING
-----------	---------------------------

TITLE:	DEUBLIN ROTATING UNION
	DEUBLIN Drehdurchführung

NO.	157-000-151987
-----	----------------

SHEET
A3

2 HEX SIZES		WRENCHES	
UNITS	"A"	 30mm	 1 1/8
METRIC [mm]	30-0.13	✓	☒
IMPERIAL [in]	1.125-0.006	✓	✓

 DEUBLIN HOERBIGER Rotary Solutions						PROJECTION: 		SCALE: 1:1	
								MATERIAL: INTERFACE CONTROL DRAWING	
						DATE		NAME	
						DRN. 27.05.2020		MZe	
						ENGR. 27.05.2020		RMika	
						APPD.			
								TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung	
B SEE ECO 60341 03/21 MSk A SEE ECO 056312 05/20 MZe						UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		NO. 157-000-151987	
ISSUE/MODIFICATION ECO DATE SIGN								SHEET A3	