CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - 17 HEXAGON

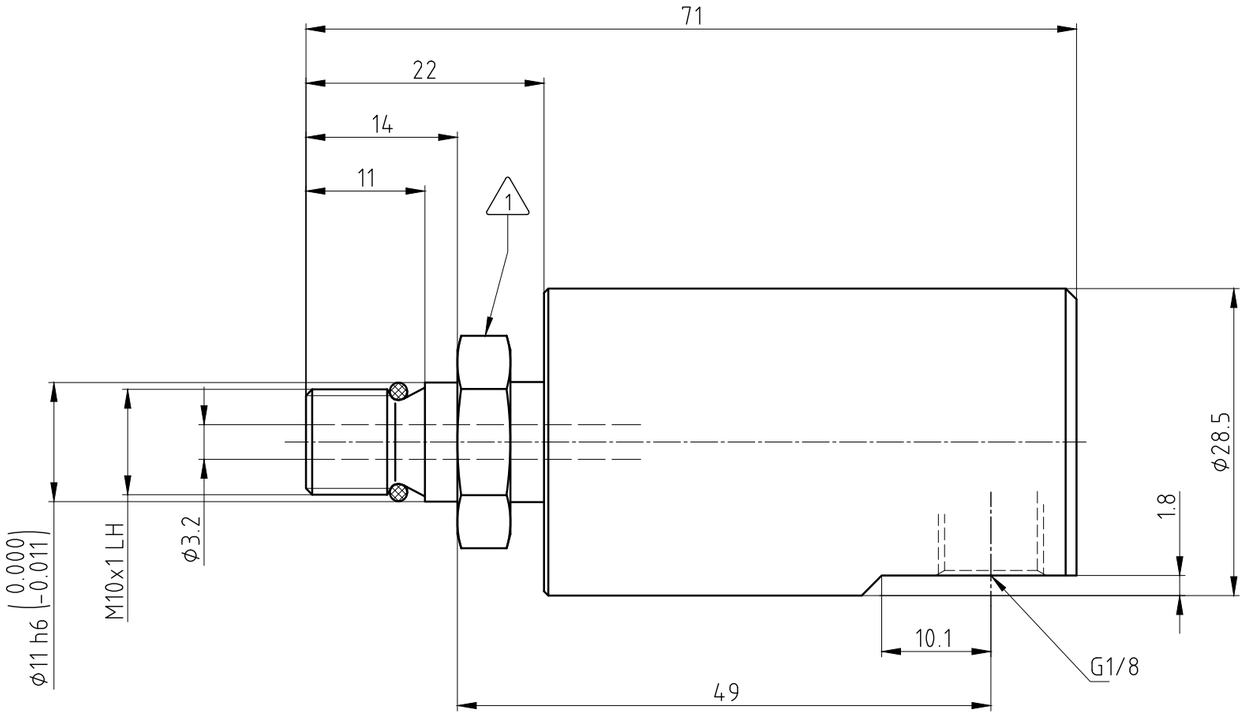

ϕ11	h6	0.000 -0.011	11.000 10.989
ϕ11	G7	+0.024 +0.006	11.024 11.006
Maß	Passung		

CUSTOMER INTERFACE

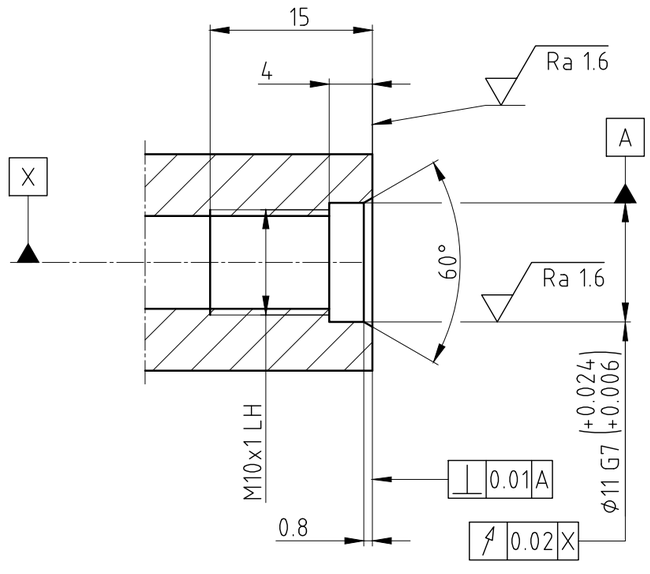

OPERATING DATA		
MEDIA	AIR	HYDRAULIC OIL
PRESSURE MAX.	10 bar	70 bar
VACUUM MAX.	6.7 kPa	-
SPEED MAX.	3500 1/min	3500 1/min
TEMPERATUR MAX.	120 °C	120 °C

DEUBLIN®
Engineered for Performance

PROJECTION:

SCALE: 2:1

MATERIAL:

INTERFACE CONTROL DRAWING

	DATE	NAME
DRN.	12.06.2012	HS
ENGR.	12.06.2012	FD
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN

TITLE:

DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO. 1005-483-330

SHEET A3